
2026.04

B137E

MHS

SOLID CARBIDE DRILL FOR DIE & MOULD MACHINING

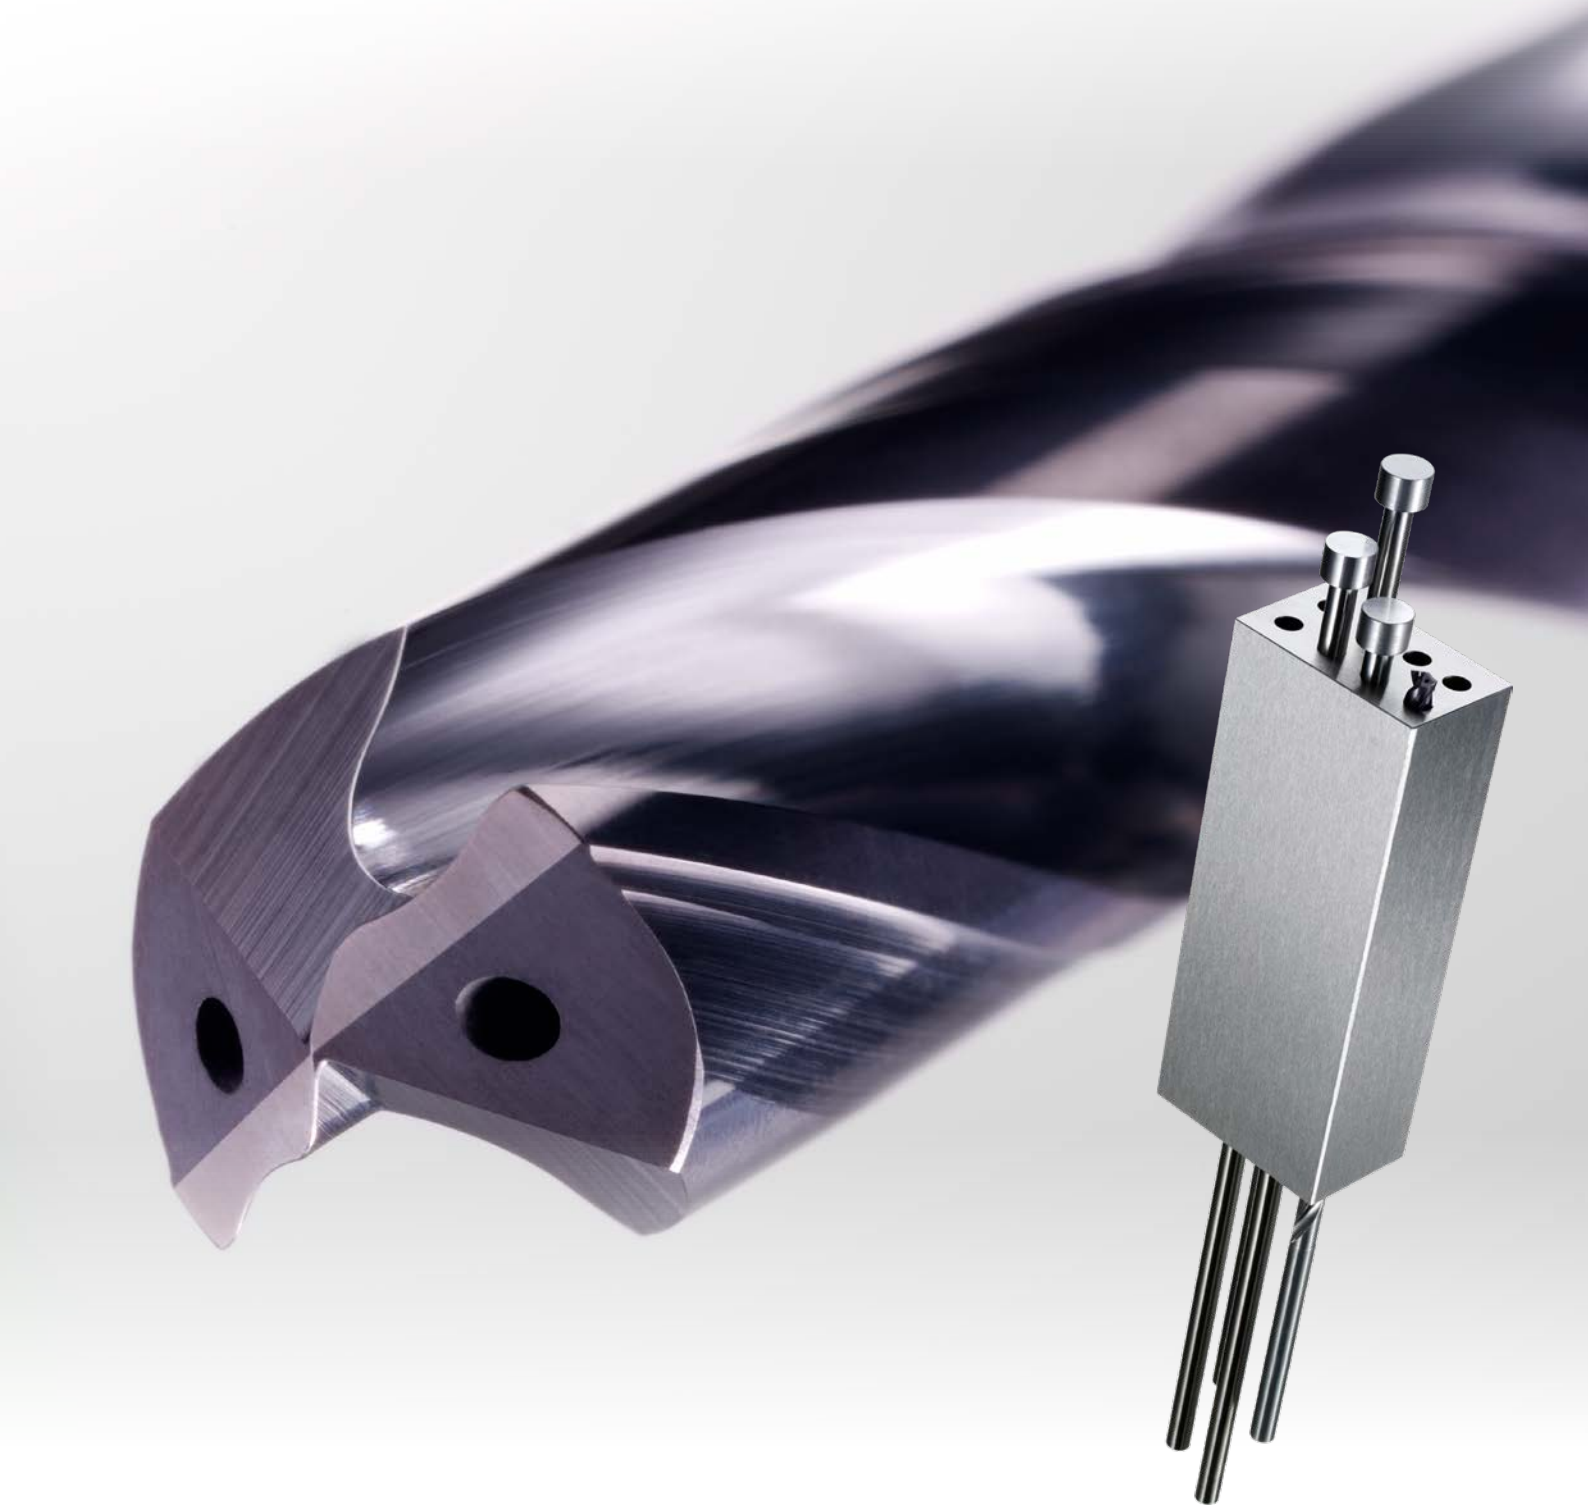


MITSUBISHI MATERIALS

MHS

SOLID CARBIDE DRILL FOR DIE & MOULD MACHINING


FEATURES

STABLE MACHINING FROM THE UNIQUE CUTTING EDGE GEOMETRY & DOUBLE MARGIN FLUTE

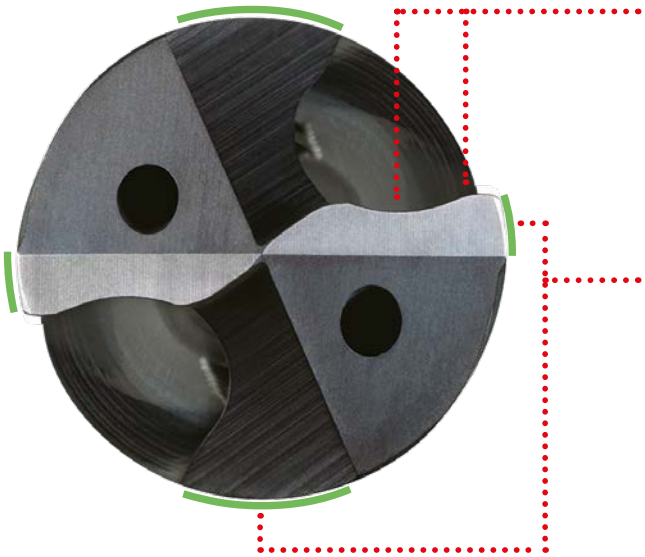

Wavy cutting edge
The wave edge design achieves a sharp peripheral edge cutting performance with a strong initial cutting point near the centre.


Double margin
Unique guide pads add stability by providing 4 contact points. This enables a reduction in drilling time.

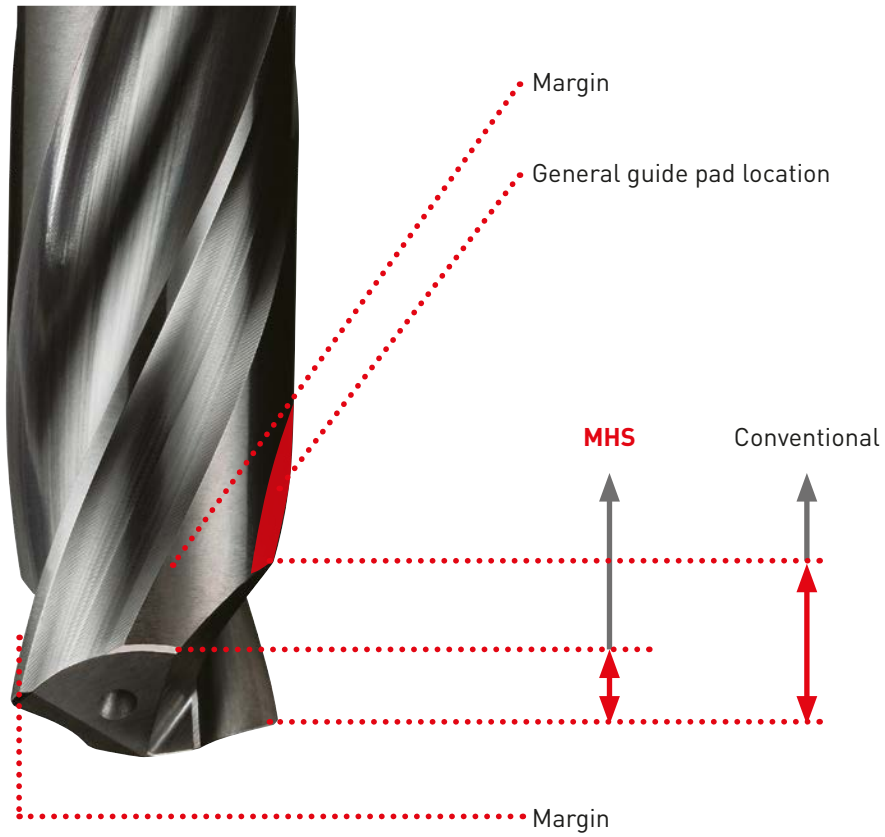


2 contact points 4 contact points

MHS


STRONG GEOMETRY FOR STABLE MACHINING OF MOULDS




Web thickness
In comparison with conventional drills a larger web thickness is used to increase overall rigidity.



Helix angle
In comparison with conventional drills, lower helix angle is used to maintain cutting edge strength.

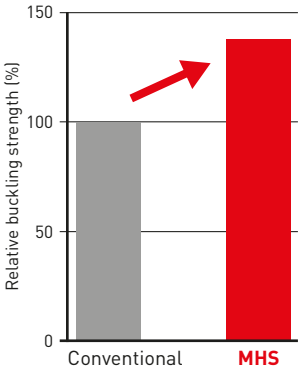


Higher rigidity with a 37 % increase in buckling strength.

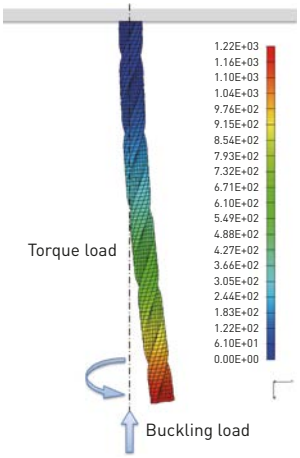

Refraction strength is the resistance against deflection when a load is added against the rotational axis direction.

LONG TOOL LIFE MIRACLE COATED VP15TF

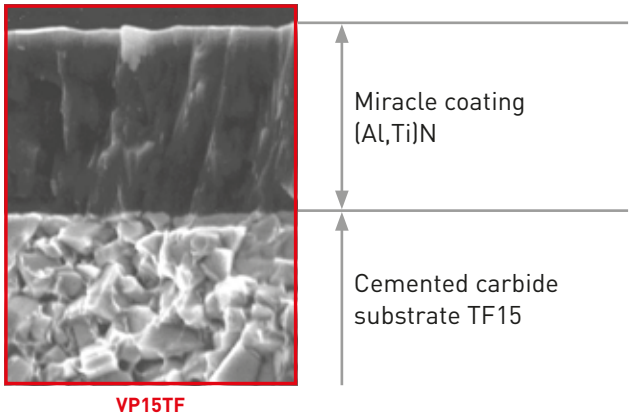

FEATURES OF VP15TF
Miracle coated VP15TF is suitable for machining of 35 – 55 HRC mould materials.


MHS

CUTTING PERFORMANCE

HIGH PRECISION (OVERSIZE) (48 – 50 HRC)

Unique geometry specially designed for die & mould machining provides superior hole accuracy!

Material	100Cr6
Hardness	48–50 HRC
Drill	MHS0500L090B (Ø 5 mm)
Hole depth (mm)	70
Vc (m/min)	20
f (mm/rev)	0.15
f (mm/min)	191
Coolant	Emulsion
Coolant pressure	2 MPa (Internal coolant)
Machine	Machining centre

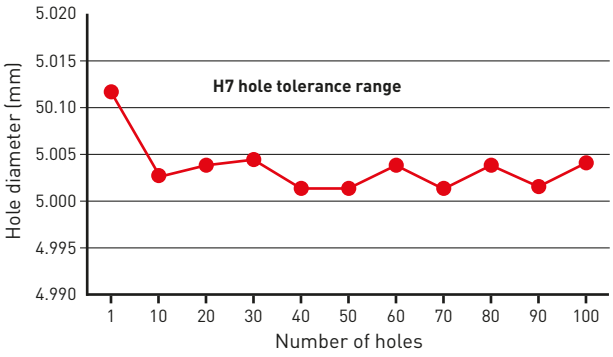


Cutting conditions for pilot drilling

Drill	MHS0500L020B (Ø 5 mm)
Hole depth (mm)	5
Vc (m/min)	20
f (mm/rev)	0.15

HIGH PRECISION (SURFACE ROUGHNESS) (48 – 50 HRC)

Unique geometry specially designed high quality holes.

Material	X155CrVmo12 1
Hardness	48–50 HRC
Drill	MHS0500L120B (Ø 5 mm)
Hole depth (mm)	100
Vc (m/min)	20
f (mm/rev)	0.10
f (mm/min)	127
Coolant	Emulsion
Coolant pressure	2 MPa (Internal coolant)
Machine	Machining centre

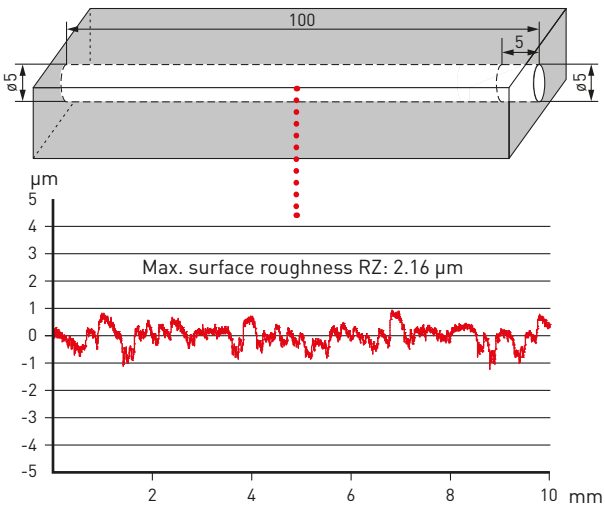

Cutting conditions for pilot drilling

Drill	MHS0500L020B (Ø 5 mm)
Hole depth (mm)	5
Vc (m/min)	20
f (mm/rev)	0.10

MHS

CUTTING PERFORMANCE

HIGH POSITIONAL ACCURACY


MHS drills give high positional accuracy on through holes.


ENTRANCE-HOLE-THE DIFFERENCE OF EXIT-HOLE

Material	X155CrVmo12 1
Hardness	17 HRC
Drill	MHS0100L035B (Ø 1 mm x Flute length 35 mm)
Hole depth (mm)	25
Vc (m/min)	40
f (mm/rev)	0.04
f (mm/min)	637
Coolant	Emulsion
Coolant pressure	2 MPa
Machine	Machining centre

CUTTING CONDITIONS FOR PILOT DRILLING

Drill	MHS0100L006B (Ø 1 mm)
Hole depth (mm)	2
Vc (m/min)	50
f (mm/rev)	0.04

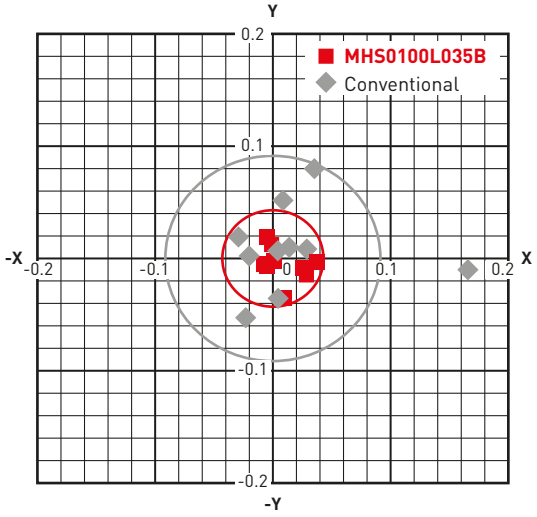




Analysis of entrance and exit positions shows that MHS drills give highly accurate, straight holes.

MHS

HIGH EFFICIENCY DRILLING (CONTINUOUS FEED) (40 HRC)

Unique geometry specially designed for die & mould machining offers high efficiency deep drilling.

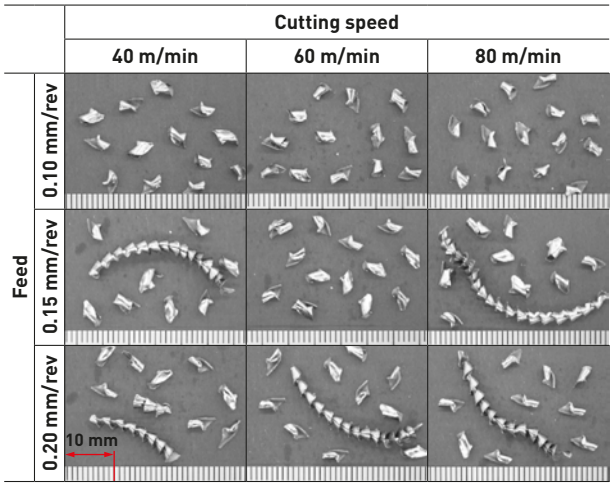



Material	CENA1 (Plastic mould steel)
Hardness	40 HRC
Drill	MHS0600L150B (Ø 6 mm)
Hole depth (mm)	115
Vc (m/min)	60
f (mm/rev)	0.15
f (mm/min)	477
Coolant	Emulsion
Coolant pressure	2 MPa (Internal coolant)
Machine	Machining centre

CUTTING CONDITIONS FOR PILOT DRILLING

Drill	MHS0600L030B (Ø 6 mm)
Hole depth (mm)	6
Vc (m/min)	60
f (mm/rev)	0.15

STAVAX (33 HRC)

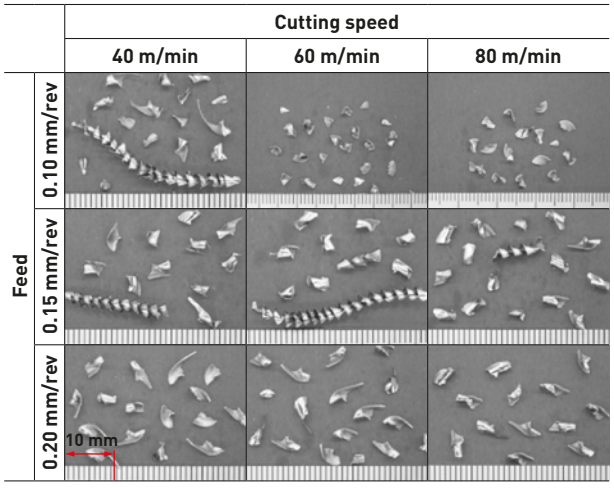

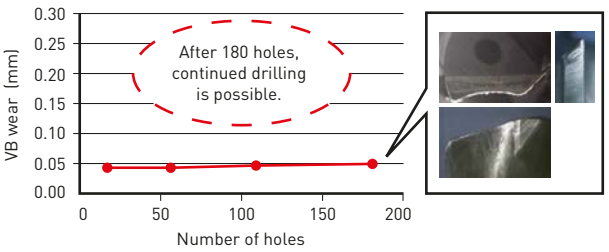


Material	STAVAX (Chromium-alloy stainless steel)
Hardness	33 HRC
Drill	MHS0600L150B (Ø 6 mm)
Hole depth (mm)	115
Vc (m/min)	40
f (mm/rev)	0.15
f (mm/min)	318
Coolant	Emulsion
Coolant pressure	2 MPa (Internal coolant)

CUTTING CONDITIONS FOR PILOT DRILLING

Drill	MHS0600L030B (Ø 6 mm)
Hole depth (mm)	6
Vc (m/min)	40
f (mm/rev)	0.15


MHS

STAVAX ESR (52 HRC)

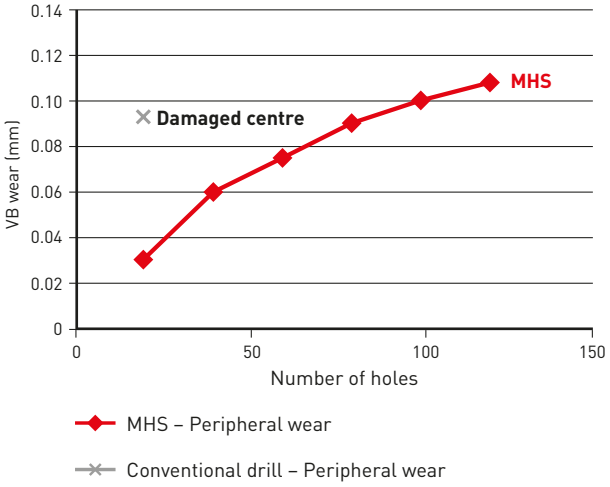

Material	STAVAX ESR
Hardness	52 HRC
Drill	MHS0200L065B 30WHNS0200-TH
Hole depth (mm)	50
Vc (m/min)	50
f (mm/rev)	0.04
Coolant	Chlorine-free emulsion
Coolant pressure	1.5 MPa
Machine	Machining centre

CUTTING EDGE DAMAGE AFTER

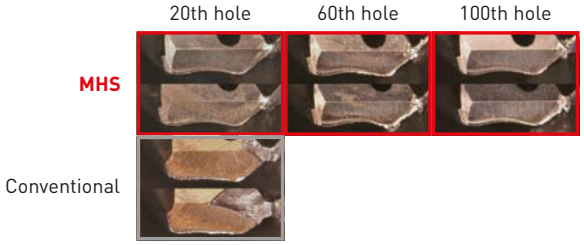



CUTTING CONDITIONS FOR PILOT DRILLING

Drill	
Hole depth (mm)	4
Vc (m/min)	50
f (mm/rev)	0.04

MHS

X38CRMOV5 3 (45 HRC)

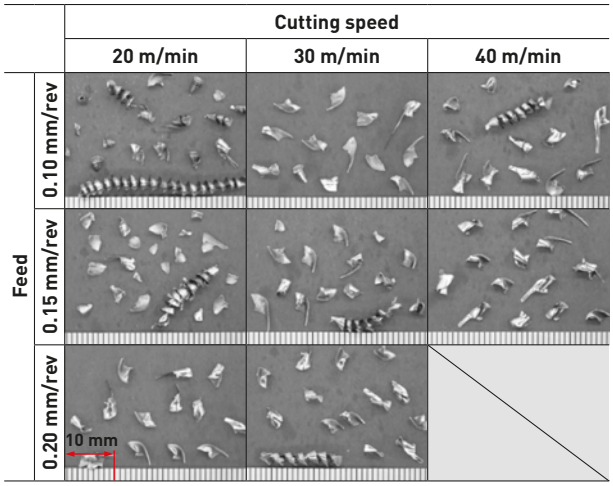

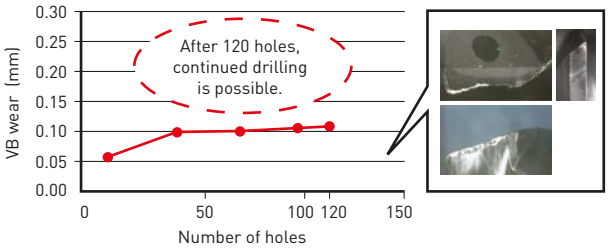

Material	X38CrMoV5 3 (Die-cast mould steel)
Hardness	45 HRC
Drill	MHS0600L150B (Ø 6 mm)
Hole depth (mm)	115
Vc (m/min)	30
f (mm/rev)	0.10
f (mm/min)	159
Coolant	Emulsion
Coolant pressure	2 MPa (Internal coolant)


CUTTING CONDITIONS FOR PILOT DRILLING


Drill	MHS0600L150B (Ø 6 mm)
Hole depth (mm)	6
Vc (m/min)	30
f (mm/rev)	0.10

MHS

X40CRMOV5-1 (50 HRC)

CONSISTENT POWER CONSUMPTION

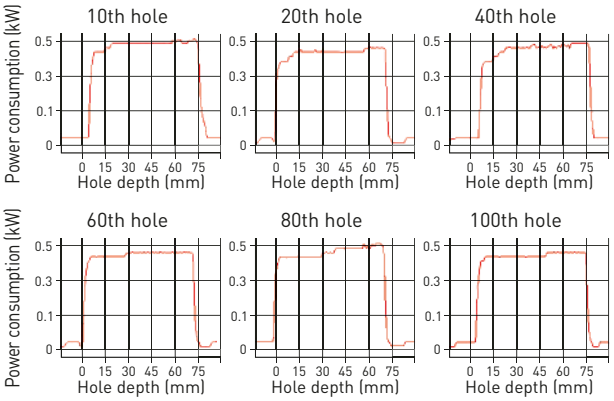

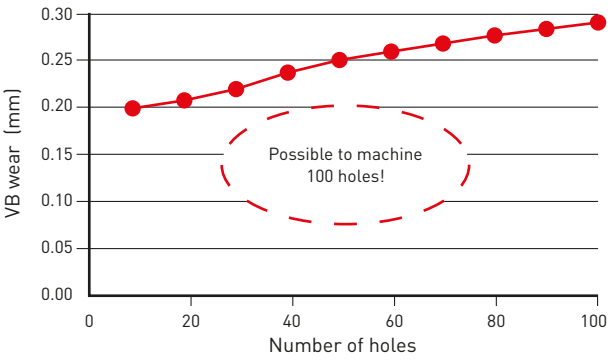

VB wear after machining 100 holes



Left edge

Right edge

Material	X40CrMoV5-1 (Alloy tool steel)
Hardness	50 HRC
Drill	MHS0500L090B (Ø 5 mm)
Hole depth (mm)	70
Vc (m/min)	20
f (mm/rev)	0.15
f (mm/min)	191
Coolant	Emulsion
Coolant pressure	2 MPa (Internal coolant)
Machine	Machining centre

CUTTING CONDITIONS FOR PILOT DRILLING


Drill	MHS0500L090B (Ø 5 mm)
Hole depth (mm)	5
Vc (m/min)	20
f (mm/rev)	0.16

MHS

100CR6 (55 HRC)

CUTTING EDGES AFTER MACHINING 5 HOLES



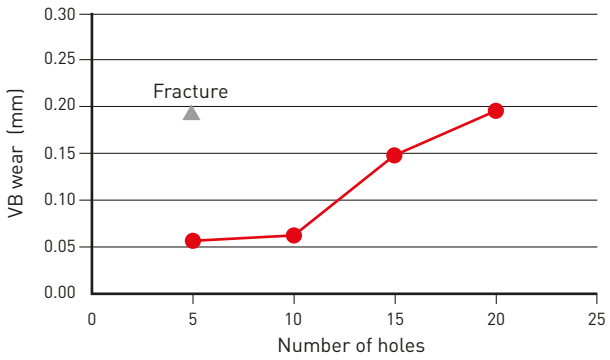

Material	100Cr6
Hardness	55 HRC
Drill	MHS0600L120B (Ø 6 mm)
Hole depth (mm)	95
Vc (m/min)	20
f (mm/rev)	0.05
f (mm/min)	53
Coolant	Emulsion
Coolant pressure	2 MPa (Internal coolant)
Machine	Machining centre

CUTTING CONDITIONS FOR PILOT DRILLING

Drill	MHS0600L120B (Ø 6 mm)
Hole depth (mm)	6
Vc (m/min)	20
f (mm/rev)	0.05


MHS

SOLID CARBIDE DRILL FOR DIE & MOULD MACHINING


P M S H




1

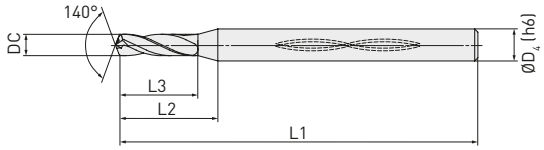


2

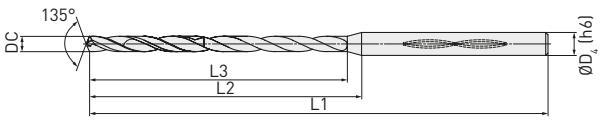

3



4



DC≤3	3<DC≤6	6<DC≤10	10<DC≤12
+ 0.010	+ 0.010	+ 0.010	+ 0.010
+ 0.002	+ 0.002	+ 0.005	+ 0.008
0	0	0	0
– 0.006	– 0.008	– 0.009	– 0.011

- Double margin drill with high bending resistance.
- Non-peck drilling with long tool life for high hardness steel, 35 HRC – 55 HRC

Order number	VP15TF	Hole depth	DC	Dimensions (mm)				Type
				L3	L2	L1	D4	
MHS0095L006B	★	3	0.95	6	9.8	60	3	1
MHS0095L009B	★	6		9	12.8	60	3	2
MHS0095L015B	★	13		15	18.8	60	3	2
MHS0095L025B	★	23		25	28.8	60	3	2
MHS0095L035B	★	30		35	38.8	80	3	2
MHS0100L006B	●	3	1.00	6	9.7	60	3	1
MHS0100L009B	●	6		9	12.7	60	3	2
MHS0100L015B	★	12		15	18.7	60	3	2
MHS0100L025B	●	22		25	28.7	60	3	2
MHS0100L035B	●	30		35	38.7	80	3	2

1/17

1. Please contact us for any geometry that is not in this catalogue (e.g. different diameter and length).
2. MHS drills are suitable for use with shrink fit holders.
3. Use the shortest type in the respective diameter as a pilot drill.

28 Vc

● : Inventory maintained. ★ : Inventory maintained in Japan. □ : Produced to order only

MHS

Order number	VP15TF	Hole depth	DC	Dimensions (mm)				Type
				L3	L2	L1	D4	
MHS0110L006B	●	2	1.10	6	9.5	60	3	1
MHS0110L009B	★	5		9	12.5	60	3	2
MHS0110L015B	●	11		15	18.5	60	3	2
MHS0110L025B	●	20		25	28.5	60	3	2
MHS0110L035B	●	29		35	38.5	80	3	2
MHS0120L006B	●	2	1.20	6	9.4	60	3	1
MHS0120L009B	★	5		9	12.4	60	3	2
MHS0120L015B	●	10		15	18.4	60	3	2
MHS0120L025B	●	18		25	28.4	60	3	2
MHS0120L035B	●	26		35	38.4	80	3	2
MHS0130L007B	●	2	1.30	7	10.2	60	3	1
MHS0130L011B	★	5		11	14.2	60	3	2
MHS0130L020B	●	12		20	23.2	60	3	2
MHS0130L030B	●	20		30	33.2	80	3	2
MHS0130L045B	●	30		45	48.2	80	3	2
MHS0140L007B	●	2	1.40	7	10.0	60	3	1
MHS0140L011B	★	5		11	14.0	60	3	2
MHS0140L020B	●	11		20	23.0	60	3	2
MHS0140L030B	★	18		30	33.0	80	3	2
MHS0140L045B	★	29		45	48.0	80	3	2
MHS0145L008B	●	3	1.45	8	10.9	60	3	1
MHS0145L013B	★	6		13	15.9	60	3	2
MHS0145L020B	★	11		20	22.9	60	3	2
MHS0145L035B	●	21		35	37.9	80	3	2
MHS0145L055B	★	30		55	57.9	100	3	2
MHS0150L008B	●	2	1.50	8	10.8	60	3	1
MHS0150L013B	★	6		13	15.8	60	3	2
MHS0150L020B	●	10		20	22.8	60	3	2
MHS0150L035B	●	20		35	37.8	80	3	2
MHS0150L055B	●	30		55	57.8	100	3	2
MHS0160L008B	●	2	1.60	8	10.6	60	3	1
MHS0160L013B	★	5		13	15.6	60	3	2
MHS0160L020B	●	10		20	22.6	60	3	2
MHS0160L035B	●	19		35	37.6	80	3	2
MHS0160L055B	●	30		55	57.6	100	3	2
MHS0170L008B	●	2	1.70	8	10.4	60	3	1
MHS0170L013B	★	5		13	15.4	60	3	2
MHS0170L020B	●	9		20	22.4	60	3	2
MHS0170L035B	●	18		35	37.4	80	3	2
MHS0170L055B	●	29		55	57.4	100	3	2
MHS0180L010B	●	3	1.80	10	12.2	60	3	1
MHS0180L015B	★	5		15	17.2	60	3	2
MHS0180L025B	●	11		25	27.2	60	3	2
MHS0180L045B	●	22		45	47.2	80	3	2
MHS0180L065B	●	30		65	67.2	100	3	2

1. Please contact us for any geometry that is not in this catalogue (e.g. different diameter and length).
2. MHS drills are suitable for use with shrink fit holders.
3. Use the shortest type in the respective diameter as a pilot drill.

28 Vc

● : Inventory maintained. ★ : Inventory maintained in Japan. □ : Produced to order only

MHS

Order number	VP15TF	Hole depth	DC	Dimensions (mm)				Type
				L3	L2	L1	D4	
MHS0190L010B	●	2	1.90	10	12.1	60	3	1
MHS0190L015B	★	5		15	17.1	60	3	2
MHS0190L025B	●	10		25	27.1	60	3	2
MHS0190L045B	●	21		45	47.1	80	3	2
MHS0190L065B	●	30		65	67.1	100	3	2
MHS0195L010B	●	2	1.95	10	12.0	60	3	1
MHS0195L015B	★	5		15	17.0	60	3	2
MHS0195L025B	★	10		25	27.0	60	3	2
MHS0195L045B	●	20		45	47.0	80	3	2
MHS0195L065B	★	30		65	67.0	100	3	2
MHS0200L010B	●	2	2.00	10	11.9	60	3	1
MHS0200L015B	★	5		15	16.9	60	3	2
MHS0200L025B	●	9		25	26.9	60	3	2
MHS0200L045B	●	20		45	46.9	80	3	2
MHS0200L065B	●	30		65	66.9	100	3	2
MHS0210L012B	●	3	2.10	12	13.7	60	3	1
MHS0210L020B	★	7		20	21.7	60	3	2
MHS0210L030B	●	11		30	31.7	80	3	2
MHS0210L055B	●	23		55	56.7	100	3	2
MHS0210L075B	●	30		75	76.7	120	3	2
MHS0220L012B	●	2	2.20	12	13.5	60	3	1
MHS0220L020B	★	6		20	21.5	60	3	2
MHS0220L030B	●	11		30	31.5	80	3	2
MHS0220L055B	●	22		55	56.5	100	3	2
MHS0220L075B	●	30		75	76.5	120	3	2
MHS0230L012B	●	2	2.30	12	13.3	60	3	1
MHS0230L020B	★	6		20	21.3	60	3	2
MHS0230L030B	●	10		30	31.3	80	3	2
MHS0230L055B	●	21		55	56.3	100	3	2
MHS0230L075B	●	30		75	76.3	120	3	2
MHS0240L012B	●	2	2.40	12	13.1	60	3	1
MHS0240L020B	★	5		20	21.1	60	3	2
MHS0240L030B	●	9		30	31.1	80	3	2
MHS0240L055B	●	20		55	56.1	100	3	2
MHS0240L075B	●	28		75	76.1	120	3	2
MHS0245L013B	★	2	2.45	13	14.0	70	4	1
MHS0245L020B	●	5		20	21.0	70	4	2
MHS0245L035B	●	11		35	36.0	90	4	2
MHS0245L065B	★	24		65	66.0	110	4	2
MHS0245L090B	●	30		90	91.0	140	4	2
MHS0250L013B	●	2	2.50	13	15.8	70	4	1
MHS0250L020B	★	5		20	22.8	70	4	2
MHS0250L035B	●	11		35	37.8	90	4	2
MHS0250L065B	●	23		65	67.8	110	4	2
MHS0250L090B	●	30		90	92.8	140	4	2

1. Please contact us for any geometry that is not in this catalogue (e.g. different diameter and length).
2. MHS drills are suitable for use with shrink fit holders.
3. Use the shortest type in the respective diameter as a pilot drill.

28 Vc

MHS

Order number	VP15TF	Hole depth	DC	Dimensions (mm)				Type
				L3	L2	L1	D4	
MHS0260L013B	●	2	2.60	13	15.6	70	4	1
MHS0260L020B	★	5		20	22.6	70	4	2
MHS0260L035B	●	10		35	37.6	90	4	2
MHS0260L065B	●	22		65	67.6	110	4	2
MHS0260L090B	●	30		90	92.6	140	4	2
MHS0270L013B	●	2	2.70	13	15.4	70	4	1
MHS0270L020B	★	4		20	22.4	70	4	2
MHS0270L035B	●	10		35	37.4	90	4	2
MHS0270L065B	●	21		65	67.4	110	4	2
MHS0270L090B	●	30		90	92.4	140	4	2
MHS0280L014B	●	2	2.80	14	16.2	70	4	1
MHS0280L020B	★	4		20	22.2	70	4	2
MHS0280L035B	●	9		35	37.2	90	4	2
MHS0280L065B	●	20		65	67.2	110	4	2
MHS0280L090B	●	29		90	92.2	140	4	2
MHS0290L014B	●	2	2.90	14	16.1	70	4	1
MHS0290L020B	★	4		20	22.1	70	4	2
MHS0290L035B	●	9		35	37.1	90	4	2
MHS0290L065B	●	19		65	67.1	110	4	2
MHS0290L090B	●	28		90	92.1	140	4	2
MHS0295L014B	★	2	2.95	14	16	70	4	1
MHS0295L020B	★	4		20	22	70	4	2
MHS0295L035B	★	9		35	37	90	4	2
MHS0295L065B	●	19		65	67	110	4	2
MHS0295L090B	●	28		90	92	140	4	2
MHS0300L020B	●	4	3.0	19	20	70	4	3
MHS0300L040B	●	10		39	40	90	4	4
MHS0300L060B	●	17		59	60	110	4	4
MHS0300L090B	●	27		89	90	140	4	4
MHS0310L020B	□	4	3.1	19.5	20	70	4	3
MHS0310L040B	□	10		39.5	40	90	4	4
MHS0310L060B	□	17		59.5	60	110	4	4
MHS0310L090B	□	26		89.5	90	140	4	4
MHS0320L020B	□	4	3.2	19.5	20	70	4	3
MHS0320L040B	□	10		39.5	40	90	4	4
MHS0320L060B	□	16		59.5	60	110	4	4
MHS0320L090B	□	25		89.5	90	140	4	4
MHS0330L020B	□	3	3.3	19.5	20	70	4	3
MHS0330L040B	□	9		39.5	40	90	4	4
MHS0330L060B	□	16		59.5	60	110	4	4
MHS0330L090B	□	25		89.5	90	140	4	4
MHS0340L020B	□	3	3.4	19.5	20	70	4	3
MHS0340L040B	□	9		39.5	40	90	4	4
MHS0340L060B	□	15		59.5	60	110	4	4
MHS0340L090B	□	24		89.5	90	140	4	4

4/17

1. Please contact us for any geometry that is not in this catalogue (e.g. different diameter and length).
2. MHS drills are suitable for use with shrink fit holders.
3. Use the shortest type in the respective diameter as a pilot drill.

28 Vc

● : Inventory maintained. ★ : Inventory maintained in Japan. □ : Produced to order only

MHS

Order number	VP15TF	Hole depth	DC	Dimensions (mm)				Type
				L3	L2	L1	D4	
MHS0350L020B	●	3	3.5	19.5	20	70	4	3
MHS0350L040B	●	9		39.5	40	90	4	4
MHS0350L060B	●	14		59.5	60	110	4	4
MHS0350L090B	●	23		89.5	90	140	4	4
MHS0360L020B	□	3	3.6	20	20	70	4	3
MHS0360L040B	□	9		40	40	90	4	4
MHS0360L060B	□	14		60	60	110	4	4
MHS0360L090B	□	22		90	90	140	4	4
MHS0360L120B	□	30		120	120	170	4	4
MHS0370L020B	□	3	3.7	20	20	70	4	3
MHS0370L040B	□	8		40	40	90	4	4
MHS0370L060B	□	14		60	60	110	4	4
MHS0370L090B	□	22		90	90	140	4	4
MHS0370L120B	□	30		120	120	170	4	4
MHS0380L020B	★	3	3.8	20	20	70	4	3
MHS0380L040B	★	8		40	40	90	4	4
MHS0380L060B	★	13		60	60	110	4	4
MHS0380L090B	★	21		90	90	140	4	4
MHS0380L120B	★	29		120	120	170	4	4
MHS0390L020B	□	3	3.9	20	20	70	4	3
MHS0390L040B	□	8		40	40	90	4	4
MHS0390L060B	□	13		60	60	110	4	4
MHS0390L090B	□	21		90	90	140	4	4
MHS0390L120B	□	28		120	120	170	4	4
MHS0400L020B	●	2	4.0	20	20	70	4	3
MHS0400L040B	●	7		40	40	90	4	4
MHS0400L060B	●	12		60	60	110	4	4
MHS0400L090B	●	20		90	90	140	4	4
MHS0400L120B	●	27		120	120	170	4	4
MHS0410L020B	□	2	4.1	18.5	20	70	6	3
MHS0410L040B	□	7		38.5	40	90	6	4
MHS0410L060B	□	12		58.5	60	110	6	4
MHS0410L090B	□	19		88.5	90	140	6	4
MHS0410L120B	□	26		118.5	120	170	6	4
MHS0420L020B	□	2	4.2	18.5	20	70	6	3
MHS0420L040B	□	7		38.5	40	90	6	4
MHS0420L060B	□	11		58.5	60	110	6	4
MHS0420L090B	□	19		88.5	90	140	6	4
MHS0420L120B	□	26		118.5	120	170	6	4
MHS0430L020B	□	2	4.3	18.5	20	70	6	3
MHS0430L040B	□	6		38.5	40	90	6	4
MHS0430L060B	□	11		58.5	60	110	6	4
MHS0430L090B	□	18		88.5	90	140	6	4
MHS0430L120B	□	25		118.5	120	170	6	4

5/17

1. Please contact us for any geometry that is not in this catalogue (e.g. different diameter and length).
2. MHS drills are suitable for use with shrink fit holders.
3. Use the shortest type in the respective diameter as a pilot drill.

28 Vc

● : Inventory maintained. ★ : Inventory maintained in Japan. □ : Produced to order only

MHS

Order number	VP15TF	Hole depth	DC	Dimensions (mm)				Type
				L3	L2	L1	D4	
MHS0440L020B	□	2	4.4	18.5	20	70	6	3
MHS0440L040B	□	6		38.5	40	90	6	4
MHS0440L060B	□	11		58.5	60	110	6	4
MHS0440L090B	□	18		88.5	90	140	6	4
MHS0440L120B	□	24		118.5	120	170	6	4
MHS0450L020B	●	2	4.5	18.5	20	70	6	3
MHS0450L040B	●	6		38.5	40	90	6	4
MHS0450L060B	●	10		58.5	60	110	6	4
MHS0450L090B	●	17		88.5	90	140	6	4
MHS0450L120B	●	24		118.5	120	170	6	4
MHS0460L020B	□	2	4.6	19	20	70	6	3
MHS0460L040B	□	6		39	40	90	6	4
MHS0460L060B	□	10		59	60	110	6	4
MHS0460L090B	□	17		89	90	140	6	4
MHS0460L120B	□	23		119	120	170	6	4
MHS0460L150B	□	30		149	150	200	6	4
MHS0470L020B	□	2	4.7	19	20	70	6	3
MHS0470L040B	□	6		39	40	90	6	4
MHS0470L060B	□	10		59	60	110	6	4
MHS0470L090B	□	16		89	90	140	6	4
MHS0470L120B	□	23		119	120	170	6	4
MHS0470L150B	□	29		149	150	200	6	4
MHS0480L020B	★	1	4.8	19	20	70	6	3
MHS0480L040B	★	6		39	40	90	6	4
MHS0480L060B	★	10		59	60	110	6	4
MHS0480L090B	★	16		89	90	140	6	4
MHS0480L120B	★	22		119	120	170	6	4
MHS0480L150B	★	29		149	150	200	6	4
MHS0490L020B	□	1	4.9	19	20	70	6	3
MHS0490L040B	□	5		39	40	90	6	4
MHS0490L060B	□	10		59	60	110	6	4
MHS0490L090B	□	16		89	90	140	6	4
MHS0490L120B	□	22		119	120	170	6	4
MHS0490L150B	□	28		149	150	200	6	4
MHS0500L020B	●	1	5.0	19	20	70	6	3
MHS0500L040B	●	5		39	40	90	6	4
MHS0500L060B	●	9		59	60	110	6	4
MHS0500L090B	●	15		89	90	140	6	4
MHS0500L120B	●	21		119	120	170	6	4
MHS0500L150B	●	27		149	150	200	6	4
MHS0510L030B	□	3	5.1	29.5	30	80	6	3
MHS0510L060B	□	9		59.5	60	110	6	4
MHS0510L090B	□	15		89.5	90	140	6	4
MHS0510L120B	□	21		119.5	120	170	6	4
MHS0510L150B	□	27		149.5	150	200	6	4

6/17

1. Please contact us for any geometry that is not in this catalogue (e.g. different diameter and length).
2. MHS drills are suitable for use with shrink fit holders.
3. Use the shortest type in the respective diameter as a pilot drill.

28 Vc

● : Inventory maintained. ★ : Inventory maintained in Japan. □ : Produced to order only

MHS

Order number	VP15TF	Hole depth	DC	Dimensions (mm)				Type
				L3	L2	L1	D4	
MHS0520L030B	□	3	5.2	29.5	30	80	6	3
MHS0520L060B	□	9		59.5	60	110	6	4
MHS0520L090B	□	15		89.5	90	140	6	4
MHS0520L120B	□	20		119.5	120	170	6	4
MHS0520L150B	□	26		149.5	150	200	6	4
MHS0530L030B	□	3	5.3	29.5	30	80	6	3
MHS0530L060B	□	9		59.5	60	110	6	4
MHS0530L090B	□	14		89.5	90	140	6	4
MHS0530L120B	□	20		119.5	120	170	6	4
MHS0530L150B	□	26		149.5	150	200	6	4
MHS0540L030B	□	3	5.4	29.5	30	80	6	3
MHS0540L060B	□	9		59.5	60	110	6	4
MHS0540L090B	□	14		89.5	90	140	6	4
MHS0540L120B	□	20		119.5	120	170	6	4
MHS0540L150B	□	25		149.5	150	200	6	4
MHS0550L030B	●	3	5.5	29.5	30	80	6	3
MHS0550L060B	●	8		59.5	60	110	6	4
MHS0550L090B	●	14		89.5	90	140	6	4
MHS0550L120B	●	19		119.5	120	170	6	4
MHS0550L150B	●	25		149.5	150	200	6	4
MHS0560L030B	□	3	5.6	30	30	80	6	3
MHS0560L060B	□	8		60	60	110	6	4
MHS0560L090B	□	14		90	90	140	6	4
MHS0560L120B	□	19		120	120	170	6	4
MHS0560L150B	□	24		150	150	200	6	4
MHS0570L030B	□	3	5.7	30	30	80	6	3
MHS0570L060B	□	8		60	60	110	6	4
MHS0570L090B	□	13		90	90	140	6	4
MHS0570L120B	□	19		120	120	170	6	4
MHS0570L150B	□	24		150	150	200	6	4
MHS0580L030B	★	3	5.8	30	30	80	6	3
MHS0580L060B	★	8		60	60	110	6	4
MHS0580L090B	★	13		90	90	140	6	4
MHS0580L120B	★	18		120	120	170	6	4
MHS0580L150B	★	23		150	150	200	6	4
MHS0590L030B	□	3	5.9	30	30	80	6	3
MHS0590L060B	□	8		60	60	110	6	4
MHS0590L090B	□	13		90	90	140	6	4
MHS0590L120B	□	18		120	120	170	6	4
MHS0590L150B	□	23		150	150	200	6	4
MHS0600L030B	●	2	6.0	30	30	80	6	3
MHS0600L060B	●	7		60	60	110	6	4
MHS0600L090B	●	12		90	90	140	6	4
MHS0600L120B	●	17		120	120	170	6	4
MHS0600L150B	●	22		150	150	200	6	4

1. Please contact us for any geometry that is not in this catalogue (e.g. different diameter and length).
2. MHS drills are suitable for use with shrink fit holders.
3. Use the shortest type in the respective diameter as a pilot drill.

28 Vc

● : Inventory maintained. ★ : Inventory maintained in Japan. □ : Produced to order only

MHS

Order number	VP15TF	Hole depth	DC	Dimensions (mm)				Type
				L3	L2	L1	D4	
MHS0610L030B	□	2	6.1	28.5	30	80	8	3
MHS0610L060B	□	7		58.5	60	110	8	4
MHS0610L090B	□	12		88.5	90	140	8	4
MHS0610L120B	□	17		118.5	120	170	8	4
MHS0610L150B	□	22		148.5	150	200	8	4
MHS0620L030B	□	2	6.2	28.5	30	80	8	3
MHS0620L060B	□	7		58.5	60	110	8	4
MHS0620L090B	□	12		88.5	90	140	8	4
MHS0620L120B	□	17		118.5	120	170	8	4
MHS0620L150B	□	21		148.5	150	200	8	4
MHS0630L030B	□	2	6.3	28.5	30	80	8	3
MHS0630L060B	□	7		58.5	60	110	8	4
MHS0630L090B	□	12		88.5	90	140	8	4
MHS0630L120B	□	16		118.5	120	170	8	4
MHS0630L150B	□	21		148.5	150	200	8	4
MHS0640L030B	□	2	6.4	28.5	30	80	8	3
MHS0640L060B	□	7		58.5	60	110	8	4
MHS0640L090B	□	11		88.5	90	140	8	4
MHS0640L120B	□	16		118.5	120	170	8	4
MHS0640L150B	□	21		148.5	150	200	8	4
MHS0650L030B	●	2	6.5	28.5	30	80	8	3
MHS0650L060B	●	6		58.5	60	110	8	4
MHS0650L090B	●	11		88.5	90	140	8	4
MHS0650L120B	●	16		118.5	120	170	8	4
MHS0650L150B	●	20		148.5	150	200	8	4
MHS0660L030B	□	2	6.6	29	30	80	8	3
MHS0660L060B	□	6		59	60	110	8	4
MHS0660L090B	□	11		89	90	140	8	4
MHS0660L120B	□	16		119	120	170	8	4
MHS0660L150B	□	20		149	150	200	8	4
MHS0660L200B	□	28		199	200	250	8	4
MHS0670L030B	□	2	6.7	29	30	80	8	3
MHS0670L060B	□	6		59	60	110	8	4
MHS0670L090B	□	11		89	90	140	8	4
MHS0670L120B	□	15		119	120	170	8	4
MHS0670L150B	□	20		149	150	200	8	4
MHS0670L200B	□	27		199	200	250	8	4
MHS0680L030B	★	2	6.8	29	30	80	8	3
MHS0680L060B	★	6		59	60	110	8	4
MHS0680L090B	★	11		89	90	140	8	4
MHS0680L120B	★	15		119	120	170	8	4
MHS0680L150B	★	19		149	150	200	8	4
MHS0680L200B	★	27		199	200	250	8	4

8/17

1. Please contact us for any geometry that is not in this catalogue (e.g. different diameter and length).
2. MHS drills are suitable for use with shrink fit holders.
3. Use the shortest type in the respective diameter as a pilot drill.

28 Vc

● : Inventory maintained. ★ : Inventory maintained in Japan. □ : Produced to order only

MHS

Order number	VP15TF	Hole depth	DC	Dimensions (mm)				Type
				L3	L2	L1	D4	
MHS0690L030B	□	2	6.9	29	30	80	8	3
MHS0690L060B	□	6		59	60	110	8	4
MHS0690L090B	□	10		89	90	140	8	4
MHS0690L120B	□	15		119	120	170	8	4
MHS0690L150B	□	19		149	150	200	8	4
MHS0690L200B	□	26		199	200	250	8	4
MHS0700L030B	●	2	7.0	29	30	80	8	3
MHS0700L060B	●	6		59	60	110	8	4
MHS0700L090B	●	10		89	90	140	8	4
MHS0700L120B	●	14		119	120	170	8	4
MHS0700L150B	●	19		149	150	200	8	4
MHS0700L200B	●	26		199	200	250	8	4
MHS0710L030B	□	2	7.1	29.5	30	80	8	3
MHS0710L060B	□	6		59.5	60	110	8	4
MHS0710L090B	□	10		89.5	90	140	8	4
MHS0710L120B	□	14		119.5	120	170	8	4
MHS0710L150B	□	19		149.5	150	200	8	4
MHS0710L200B	□	26		199.5	200	250	8	4
MHS0720L030B	□	2	7.2	29.5	30	80	8	3
MHS0720L060B	□	6		59.5	60	110	8	4
MHS0720L090B	□	10		89.5	90	140	8	4
MHS0720L120B	□	14		119.5	120	170	8	4
MHS0720L150B	□	18		149.5	150	200	8	4
MHS0720L200B	□	25		199.5	200	250	8	4
MHS0730L030B	□	2	7.3	29.5	30	80	8	3
MHS0730L060B	□	6		59.5	60	110	8	4
MHS0730L090B	□	10		89.5	90	140	8	4
MHS0730L120B	□	14		119.5	120	170	8	4
MHS0730L150B	□	18		149.5	150	200	8	4
MHS0730L200B	□	25		199.5	200	250	8	4
MHS0740L030B	□	1	7.4	29.5	30	80	8	3
MHS0740L060B	□	6		59.5	60	110	8	4
MHS0740L090B	□	10		89.5	90	140	8	4
MHS0740L120B	□	14		119.5	120	170	8	4
MHS0740L150B	□	18		149.5	150	200	8	4
MHS0740L200B	□	24		199.5	200	250	8	4
MHS0750L030B	●	1	7.5	29.5	30	80	8	3
MHS0750L060B	●	5		59.5	60	110	8	4
MHS0750L090B	●	9		89.5	90	140	8	4
MHS0750L120B	●	13		119.5	120	170	8	4
MHS0750L150B	●	17		149.5	150	200	8	4
MHS0750L200B	●	24		199.5	200	250	8	4

9/17

1. Please contact us for any geometry that is not in this catalogue (e.g. different diameter and length).
2. MHS drills are suitable for use with shrink fit holders.
3. Use the shortest type in the respective diameter as a pilot drill.

28 Vc

MHS

Order number	VP15TF	Hole depth	DC	Dimensions (mm)				Type
				L3	L2	L1	D4	
MHS0760L030B	□	1	7.6	30	30	80	8	3
MHS0760L060B	□	5		60	60	110	8	4
MHS0760L090B	□	9		90	90	140	8	4
MHS0760L120B	□	13		120	120	170	8	4
MHS0760L150B	□	17		150	150	200	8	4
MHS0760L200B	□	24		200	200	250	8	4
MHS0760L250B	□	30		250	250	300	8	4
MHS0770L030B	□	1	7.7	30	30	80	8	3
MHS0770L060B	□	5		60	60	110	8	4
MHS0770L090B	□	9		90	90	140	8	4
MHS0770L120B	□	13		120	120	170	8	4
MHS0770L150B	□	17		150	150	200	8	4
MHS0770L200B	□	23		200	200	250	8	4
MHS0770L250B	□	30		250	250	300	8	4
MHS0780L030B	★	1	7.8	30	30	80	8	3
MHS0780L060B	★	5		60	60	110	8	4
MHS0780L090B	★	9		90	90	140	8	4
MHS0780L120B	★	13		120	120	170	8	4
MHS0780L150B	★	17		150	150	200	8	4
MHS0780L200B	★	23		200	200	250	8	4
MHS0780L250B	★	30		250	250	300	8	4
MHS0790L030B	□	1	7.9	30	30	80	8	3
MHS0790L060B	□	5		60	60	110	8	4
MHS0790L090B	□	9		90	90	140	8	4
MHS0790L120B	□	13		120	120	170	8	4
MHS0790L150B	□	16		150	150	200	8	4
MHS0790L200B	□	23		200	200	250	8	4
MHS0790L250B	□	29		250	250	300	8	4
MHS0800L030B	●	1	8.0	30	30	80	8	3
MHS0800L060B	●	5		60	60	110	8	4
MHS0800L090B	●	9		90	90	140	8	4
MHS0800L120B	●	12		120	120	170	8	4
MHS0800L150B	●	16		150	150	200	8	4
MHS0800L200B	●	22		200	200	250	8	4
MHS0800L250B	●	29		250	250	300	8	4
MHS0810L040B	□	2	8.1	38.5	40	100	10	3
MHS0810L090B	□	8		88.5	90	150	10	4
MHS0810L120B	□	12		118.5	120	180	10	4
MHS0810L150B	□	16		148.5	150	210	10	4
MHS0810L200B	□	22		198.5	200	260	10	4
MHS0810L250B	□	28		248.5	250	310	10	4
MHS0820L040B	□	2	8.2	38.5	40	100	10	3
MHS0820L090B	□	8		88.5	90	150	10	4
MHS0820L120B	□	12		118.5	120	180	10	4
MHS0820L150B	□	16		148.5	150	210	10	4
MHS0820L200B	□	22		198.5	200	260	10	4
MHS0820L250B	□	28		248.5	250	310	10	4

10/17

1. Please contact us for any geometry that is not in this catalogue (e.g. different diameter and length).
2. MHS drills are suitable for use with shrink fit holders.
3. Use the shortest type in the respective diameter as a pilot drill.

28 Vc

● : Inventory maintained. ★ : Inventory maintained in Japan. □ : Produced to order only

MHS

Order number	VP15TF	Hole depth	DC	Dimensions (mm)				Type
				L3	L2	L1	D4	
MHS0830L040B	□	2	8.3	38.5	40	100	10	3
MHS0830L090B	□	8		88.5	90	150	10	4
MHS0830L120B	□	12		118.5	120	180	10	4
MHS0830L150B	□	15		148.5	150	210	10	4
MHS0830L200B	□	21		198.5	200	260	10	4
MHS0830L250B	□	27		248.5	250	310	10	4
MHS0840L040B	□	2	8.4	38.5	40	100	10	3
MHS0840L090B	□	8		88.5	90	150	10	4
MHS0840L120B	□	12		118.5	120	180	10	4
MHS0840L150B	□	15		148.5	150	210	10	4
MHS0840L200B	□	21		198.5	200	260	10	4
MHS0840L250B	□	27		248.5	250	310	10	4
MHS0850L040B	●	2	8.5	38.5	40	100	10	3
MHS0850L090B	●	8		88.5	90	150	10	4
MHS0850L120B	●	11		118.5	120	180	10	4
MHS0850L150B	●	15		148.5	150	210	10	4
MHS0850L200B	●	21		198.5	200	260	10	4
MHS0850L250B	●	27		248.5	250	310	10	4
MHS0860L040B	□	2	8.6	39	40	100	10	3
MHS0860L090B	□	8		89	90	150	10	4
MHS0860L120B	□	11		119	120	180	10	4
MHS0860L150B	□	15		149	150	210	10	4
MHS0860L200B	□	21		199	200	260	10	4
MHS0860L250B	□	26		249	250	310	10	4
MHS0870L040B	□	2	8.7	39	40	100	10	3
MHS0870L090B	□	8		89	90	150	10	4
MHS0870L120B	□	11		119	120	180	10	4
MHS0870L150B	□	15		149	150	210	10	4
MHS0870L200B	□	20		199	200	260	10	4
MHS0870L250B	□	26		249	250	310	10	4
MHS0880L040B	★	2	8.8	39	40	100	10	3
MHS0880L090B	★	8		89	90	150	10	4
MHS0880L120B	★	11		119	120	180	10	4
MHS0880L150B	★	14		149	150	210	10	4
MHS0880L200B	★	20		199	200	260	10	4
MHS0880L250B	★	26		249	250	310	10	4
MHS0890L040B	□	2	8.9	39	40	100	10	3
MHS0890L090B	□	7		89	90	150	10	4
MHS0890L120B	□	11		119	120	180	10	4
MHS0890L150B	□	14		149	150	210	10	4
MHS0890L200B	□	20		199	200	260	10	4
MHS0890L250B	□	25		249	250	310	10	4

11/17

1. Please contact us for any geometry that is not in this catalogue (e.g. different diameter and length).
2. MHS drills are suitable for use with shrink fit holders.
3. Use the shortest type in the respective diameter as a pilot drill.

28 Vc

● : Inventory maintained. ★ : Inventory maintained in Japan. □ : Produced to order only

MHS

Order number	VP15TF	Hole depth	DC	Dimensions (mm)				Type
				L3	L2	L1	D4	
MHS0900L040B	●	2	9.0	39	40	100	10	3
MHS0900L090B	●	7		89	90	150	10	4
MHS0900L120B	●	11		119	120	180	10	4
MHS0900L150B	●	14		149	150	210	10	4
MHS0900L200B	●	20		199	200	260	10	4
MHS0900L250B	●	25		249	250	310	10	4
MHS0910L040B	□	2	9.1	39.5	40	100	10	3
MHS0910L090B	□	7		89.5	90	150	10	4
MHS0910L120B	□	11		119.5	120	180	10	4
MHS0910L150B	□	14		149.5	150	210	10	4
MHS0910L200B	□	19		199.5	200	260	10	4
MHS0910L250B	□	25		249.5	250	310	10	4
MHS0910L300B	□	30		299.5	300	360	10	4
MHS0920L040B	□	2	9.2	39.5	40	100	10	3
MHS0920L090B	□	7		89.5	90	150	10	4
MHS0920L120B	□	10		119.5	120	180	10	4
MHS0920L150B	□	14		149.5	150	210	10	4
MHS0920L200B	□	19		199.5	200	260	10	4
MHS0920L250B	□	25		249.5	250	310	10	4
MHS0920L300B	□	30		299.5	300	360	10	4
MHS0930L040B	□	2	9.3	39.5	40	100	10	3
MHS0930L090B	□	7		89.5	90	150	10	4
MHS0930L120B	□	10		119.5	120	180	10	4
MHS0930L150B	□	14		149.5	150	210	10	4
MHS0930L200B	□	19		199.5	200	260	10	4
MHS0930L250B	□	24		249.5	250	310	10	4
MHS0930L300B	□	30		299.5	300	360	10	4
MHS0940L040B	□	2	9.4	39.5	40	100	10	3
MHS0940L090B	□	7		89.5	90	150	10	4
MHS0940L120B	□	10		119.5	120	180	10	4
MHS0940L150B	□	13		149.5	150	210	10	4
MHS0940L200B	□	19		199.5	200	260	10	4
MHS0940L250B	□	24		249.5	250	310	10	4
MHS0940L300B	□	29		299.5	300	360	10	4
MHS0950L040B	●	2	9.5	39.5	40	100	10	3
MHS0950L090B	●	7		89.5	90	150	10	4
MHS0950L120B	●	10		119.5	120	180	10	4
MHS0950L150B	●	13		149.5	150	210	10	4
MHS0950L200B	●	18		199.5	200	260	10	4
MHS0950L250B	●	24		249.5	250	310	10	4
MHS0950L300B	●	29		299.5	300	360	10	4

12/17

1. Please contact us for any geometry that is not in this catalogue (e.g. different diameter and length).
2. MHS drills are suitable for use with shrink fit holders.
3. Use the shortest type in the respective diameter as a pilot drill.

28 Vc

● : Inventory maintained. ★ : Inventory maintained in Japan. □ : Produced to order only

MHS

Order number	VP15TF	Hole depth	DC	Dimensions (mm)				Type
				L3	L2	L1	D4	
MHS0960L040B	□	2	9.6	40	40	100	10	3
MHS0960L090B	□	7		90	90	150	10	4
MHS0960L120B	□	10		120	120	180	10	4
MHS0960L150B	□	13		150	150	210	10	4
MHS0960L200B	□	18		200	200	260	10	4
MHS0960L250B	□	24		250	250	310	10	4
MHS0960L300B	□	29		300	300	360	10	4
MHS0970L040B	□	2	9.7	40	40	100	10	3
MHS0970L090B	□	7		90	90	150	10	4
MHS0970L120B	□	10		120	120	180	10	4
MHS0970L150B	□	13		150	150	210	10	4
MHS0970L200B	□	18		200	200	260	10	4
MHS0970L250B	□	23		250	250	310	10	4
MHS0970L300B	□	28		300	300	360	10	4
MHS0980L040B	★	2	9.8	40	40	100	10	3
MHS0980L090B	★	7		90	90	150	10	4
MHS0980L120B	★	10		120	120	180	10	4
MHS0980L150B	★	13		150	150	210	10	4
MHS0980L200B	★	18		200	200	260	10	4
MHS0980L250B	★	23		250	250	310	10	4
MHS0980L300B	★	28		300	300	360	10	4
MHS0990L040B	□	2	9.9	40	40	100	10	3
MHS0990L090B	□	7		90	90	150	10	4
MHS0990L120B	□	10		120	120	180	10	4
MHS0990L150B	□	13		150	150	210	10	4
MHS0990L200B	□	18		200	200	260	10	4
MHS0990L250B	□	23		250	250	310	10	4
MHS0990L300B	□	28		300	300	360	10	4
MHS1000L040B	●	1	10.0	40	40	100	10	3
MHS1000L090B	●	6		90	90	150	10	4
MHS1000L120B	●	9		120	120	180	10	4
MHS1000L150B	●	12		150	150	210	10	4
MHS1000L200B	●	17		200	200	260	10	4
MHS1000L250B	●	22		250	250	310	10	4
MHS1000L300B	●	27		300	300	360	10	4
MHS1010L040B	□	1	10.1	38.5	40	100	12	3
MHS1010L090B	□	6		88.5	90	150	12	4
MHS1010L120B	□	9		118.5	120	180	12	4
MHS1010L150B	□	12		148.5	150	210	12	4
MHS1010L200B	□	17		198.5	200	260	12	4
MHS1010L250B	□	22		248.5	250	310	12	4
MHS1010L300B	□	27		298.5	300	360	12	4

13/17

1. Please contact us for any geometry that is not in this catalogue (e.g. different diameter and length).
2. MHS drills are suitable for use with shrink fit holders.
3. Use the shortest type in the respective diameter as a pilot drill.

28 Vc

● : Inventory maintained. ★ : Inventory maintained in Japan. □ : Produced to order only

MHS

Order number	VP15TF	Hole depth	DC	Dimensions (mm)				Type
				L3	L2	L1	D4	
MHS1020L040B	□	1	10.2	38.5	40	100	12	3
MHS1020L090B	□	6		88.5	90	150	12	4
MHS1020L120B	□	9		118.5	120	180	12	4
MHS1020L150B	□	12		148.5	150	210	12	4
MHS1020L200B	□	17		198.5	200	260	12	4
MHS1020L250B	□	22		248.5	250	310	12	4
MHS1020L300B	□	27		298.5	300	360	12	4
MHS1030L040B	□	1	10.3	38.5	40	100	12	3
MHS1030L090B	□	6		88.5	90	150	12	4
MHS1030L120B	□	9		118.5	120	180	12	4
MHS1030L150B	□	12		148.5	150	210	12	4
MHS1030L200B	□	17		198.5	200	260	12	4
MHS1030L250B	□	22		248.5	250	310	12	4
MHS1030L300B	□	26		298.5	300	360	12	4
MHS1040L040B	□	1	10.4	38.5	40	100	12	3
MHS1040L090B	□	6		88.5	90	150	12	4
MHS1040L120B	□	9		118.5	120	180	12	4
MHS1040L150B	□	12		148.5	150	210	12	4
MHS1040L200B	□	17		198.5	200	260	12	4
MHS1040L250B	□	21		248.5	250	310	12	4
MHS1040L300B	□	26		298.5	300	360	12	4
MHS1050L040B	●	1	10.5	38.5	40	100	12	3
MHS1050L090B	●	6		88.5	90	150	12	4
MHS1050L120B	●	9		118.5	120	180	12	4
MHS1050L150B	●	12		148.5	150	210	12	4
MHS1050L200B	●	16		198.5	200	260	12	4
MHS1050L250B	●	21		248.5	250	310	12	4
MHS1050L300B	●	26		298.5	300	360	12	4
MHS1060L040B	□	1	10.6	39	40	100	12	3
MHS1060L090B	□	6		89	90	150	12	4
MHS1060L120B	□	9		119	120	180	12	4
MHS1060L150B	□	12		149	150	210	12	4
MHS1060L200B	□	16		199	200	260	12	4
MHS1060L250B	□	21		249	250	310	12	4
MHS1060L300B	□	26		299	300	360	12	4
MHS1070L040B	□	1	10.7	39	40	100	12	3
MHS1070L090B	□	6		89	90	150	12	4
MHS1070L120B	□	9		119	120	180	12	4
MHS1070L150B	□	11		149	150	210	12	4
MHS1070L200B	□	16		199	200	260	12	4
MHS1070L250B	□	21		249	250	310	12	4
MHS1070L300B	□	25		299	300	360	12	4

1. Please contact us for any geometry that is not in this catalogue (e.g. different diameter and length).
2. MHS drills are suitable for use with shrink fit holders.
3. Use the shortest type in the respective diameter as a pilot drill.

28 Vc

● : Inventory maintained. ★ : Inventory maintained in Japan. □ : Produced to order only

MHS

Order number	VP15TF	Hole depth	DC	Dimensions (mm)				Type
				L3	L2	L1	D4	
MHS1080L040B	★	1	10.8	39	40	100	12	3
MHS1080L090B	★	6		89	90	150	12	4
MHS1080L120B	★	9		119	120	180	12	4
MHS1080L150B	★	11		149	150	210	12	4
MHS1080L200B	★	16		199	200	260	12	4
MHS1080L250B	★	21		249	250	310	12	4
MHS1080L300B	★	25		299	300	360	12	4
MHS1090L040B	□	1	10.9	39	40	100	12	3
MHS1090L090B	□	6		89	90	150	12	4
MHS1090L120B	□	8		119	120	180	12	4
MHS1090L150B	□	11		149	150	210	12	4
MHS1090L200B	□	16		199	200	260	12	4
MHS1090L250B	□	20		249	250	310	12	4
MHS1090L300B	□	25		299	300	360	12	4
MHS1100L040B	●	1	11.0	39	40	100	12	3
MHS1100L090B	●	6		89	90	150	12	4
MHS1100L120B	●	8		119	120	180	12	4
MHS1100L150B	●	11		149	150	210	12	4
MHS1100L200B	●	16		199	200	260	12	4
MHS1100L250B	●	20		249	250	310	12	4
MHS1100L300B	●	25		299	300	360	12	4
MHS1110L040B	□	1	11.1	39.5	40	100	12	3
MHS1110L090B	□	6		89.5	90	150	12	4
MHS1110L120B	□	8		119.5	120	180	12	4
MHS1110L150B	□	11		149.5	150	210	12	4
MHS1110L200B	□	15		199.5	200	260	12	4
MHS1110L250B	□	20		249.5	250	310	12	4
MHS1110L300B	□	24		299.5	300	360	12	4
MHS1120L040B	□	1	11.2	39.5	40	100	12	3
MHS1120L090B	□	5		89.5	90	150	12	4
MHS1120L120B	□	8		119.5	120	180	12	4
MHS1120L150B	□	11		149.5	150	210	12	4
MHS1120L200B	□	15		199.5	200	260	12	4
MHS1120L250B	□	20		249.5	250	310	12	4
MHS1120L300B	□	24		299.5	300	360	12	4
MHS1130L040B	□	1	11.3	39.5	40	100	12	3
MHS1130L090B	□	5		89.5	90	150	12	4
MHS1130L120B	□	8		119.5	120	180	12	4
MHS1130L150B	□	11		149.5	150	210	12	4
MHS1130L200B	□	15		199.5	200	260	12	4
MHS1130L250B	□	20		249.5	250	310	12	4
MHS1130L300B	□	24		299.5	300	360	12	4

15/17

1. Please contact us for any geometry that is not in this catalogue (e.g. different diameter and length).
2. MHS drills are suitable for use with shrink fit holders.
3. Use the shortest type in the respective diameter as a pilot drill.

28 Vc

● : Inventory maintained. ★ : Inventory maintained in Japan. □ : Produced to order only

MHS

Order number	VP15TF	Hole depth	DC	Dimensions (mm)				Type
				L3	L2	L1	D4	
MHS1140L040B	□	1	11.4	39.5	40	100	12	3
MHS1140L090B	□	5		89.5	90	150	12	4
MHS1140L120B	□	8		119.5	120	180	12	4
MHS1140L150B	□	11		149.5	150	210	12	4
MHS1140L200B	□	15		199.5	200	260	12	4
MHS1140L250B	□	19		249.5	250	310	12	4
MHS1140L300B	□	24		299.5	300	360	12	4
MHS1150L040B	●	1	11.5	39.5	40	100	12	3
MHS1150L090B	●	5		89.5	90	150	12	4
MHS1150L120B	●	8		119.5	120	180	12	4
MHS1150L150B	●	10		149.5	150	210	12	4
MHS1150L200B	●	15		199.5	200	260	12	4
MHS1150L250B	●	19		249.5	250	310	12	4
MHS1150L300B	●	24		299.5	300	360	12	4
MHS1160L040B	□	1	11.6	40	40	100	12	3
MHS1160L090B	□	5		90	90	150	12	4
MHS1160L120B	□	8		120	120	180	12	4
MHS1160L150B	□	10		150	150	210	12	4
MHS1160L200B	□	15		200	200	260	12	4
MHS1160L250B	□	19		250	250	310	12	4
MHS1160L300B	□	23		300	300	360	12	4
MHS1170L040B	□	1	11.7	40	40	100	12	3
MHS1170L090B	□	5		90	90	150	12	4
MHS1170L120B	□	8		120	120	180	12	4
MHS1170L150B	□	10		150	150	210	12	4
MHS1170L200B	□	15		200	200	260	12	4
MHS1170L250B	□	19		250	250	310	12	4
MHS1170L300B	□	23		300	300	360	12	4
MHS1180L040B	★	1	11.8	40	40	100	12	3
MHS1180L090B	★	5		90	90	150	12	4
MHS1180L120B	★	8		120	120	180	12	4
MHS1180L150B	★	10		150	150	210	12	4
MHS1180L200B	★	14		200	200	260	12	4
MHS1180L250B	★	19		250	250	310	12	4
MHS1180L300B	★	23		300	300	360	12	4
MHS1190L040B	□	1	11.9	40	40	100	12	3
MHS1190L090B	□	5		90	90	150	12	4
MHS1190L120B	□	8		120	120	180	12	4
MHS1190L150B	□	10		150	150	210	12	4
MHS1190L200B	□	14		200	200	260	12	4
MHS1190L250B	□	19		250	250	310	12	4
MHS1190L300B	□	23		300	300	360	12	4

1. Please contact us for any geometry that is not in this catalogue (e.g. different diameter and length).
2. MHS drills are suitable for use with shrink fit holders.
3. Use the shortest type in the respective diameter as a pilot drill.

28 Vc

● : Inventory maintained. ★ : Inventory maintained in Japan. □ : Produced to order only

MHS

Order number	VP15TF	Hole depth	DC	Dimensions (mm)				Type
				L3	L2	L1	D4	
MHS1200L040B	●	1	12.0	40	40	100	12	3
MHS1200L090B	●	5		90	90	150	12	4
MHS1200L120B	●	7		120	120	180	12	4
MHS1200L150B	●	10		150	150	210	12	4
MHS1200L200B	●	14		200	200	260	12	4
MHS1200L250B	●	18		250	250	310	12	4
MHS1200L300B	●	22		300	300	360	12	4

17/17

1. Please contact us for any geometry that is not in this catalogue (e.g. different diameter and length).
2. MHS drills are suitable for use with shrink fit holders.
3. Use the shortest type in the respective diameter as a pilot drill.

28 Vc

MHS

RECOMMENDED CUTTING CONDITIONS

	Material	DC	Vc	n	ft	f
P	Mild steel, Carbon steel, Alloy steel	1	40	12700	0.030 (0.020 – 0.040)	380
		1.2	50	13300	0.035 (0.025 – 0.050)	465
		1.6	60	11900	0.050 (0.030 – 0.065)	595
		2	70	11100	0.060 (0.040 – 0.080)	665
		2.5	80	10200	0.075 (0.050 – 0.100)	765
		3.2	80	8000	0.100 (0.070 – 0.130)	800
		4	80	6400	0.100 (0.090 – 0.110)	640
		5	80	5100	0.130 (0.110 – 0.140)	665
		6.3	80	4000	0.160 (0.140 – 0.180)	640
		8	80	3200	0.200 (0.180 – 0.230)	640
		10	80	2600	0.250 (0.220 – 0.280)	650
		12	80	2100	0.300 (0.270 – 0.340)	630
	Pre-hardened steel, Alloy tool steel	1	20	6400	0.025 (0.020 – 0.030)	160
		1.2	30	8000	0.030 (0.020 – 0.035)	240
		1.6	40	8000	0.040 (0.030 – 0.045)	320
		2	50	8000	0.045 (0.035 – 0.060)	360
		2.5	60	7600	0.060 (0.045 – 0.075)	455
		3.2	60	6000	0.080 (0.060 – 0.090)	480
		4	60	4800	0.080 (0.070 – 0.100)	385
		5	60	3800	0.110 (0.090 – 0.130)	420
		6.3	60	3000	0.130 (0.110 – 0.160)	390
		8	60	2400	0.170 (0.140 – 0.200)	410
		10	60	1900	0.210 (0.170 – 0.250)	400
		12	60	1600	0.250 (0.210 – 0.300)	400
M	Austenitic stainless steel, Ferritic and martensitic stainless steel	1	20	6400	0.030 (0.020 – 0.040)	190
		1.2	30	8000	0.035 (0.025 – 0.050)	280
		1.6	40	8000	0.050 (0.030 – 0.065)	400
		2	50	8000	0.060 (0.040 – 0.080)	480
		2.5	60	7600	0.075 (0.050 – 0.100)	570
		3.2	60	6000	0.100 (0.070 – 0.130)	600
		4	60	4800	0.090 (0.080 – 0.090)	430
		5	60	3800	0.110 (0.100 – 0.120)	420
		6.3	60	3000	0.140 (0.130 – 0.150)	420
		8	60	2400	0.170 (0.160 – 0.190)	410
		10	60	1900	0.220 (0.200 – 0.230)	420
		12	60	1600	0.260 (0.240 – 0.280)	415
H	Hardened steel, Hardened stainless steel	1	40	12700	0.020 (0.015 – 0.025)	255
		1.2	40	10600	0.025 (0.020 – 0.030)	265
		1.6	50	10000	0.035 (0.025 – 0.040)	350
		2	50	8000	0.040 (0.030 – 0.050)	320
		2.5	60	7600	0.050 (0.040 – 0.065)	380
		3.2	60	6000	0.060 (0.050 – 0.080)	360
		4	60	4800	0.080 (0.060 – 0.100)	385
		5	60	3800	0.100 (0.080 – 0.130)	380
		6.3	60	3000	0.110 (0.090 – 0.130)	330
		8	60	2400	0.140 (0.120 – 0.160)	335
		10	60	1900	0.170 (0.140 – 0.200)	325
		12	60	1600	0.210 (0.170 – 0.240)	335

MHS

RECOMMENDED CUTTING CONDITIONS

	Material	DC	Vc	n	ft	f
H	Hardened steel, Heat resistant alloy	1	10	3200	0.015 (0.015 – 0.020)	50
		1.2	10	2700	0.020 (0.015 – 0.025)	55
		1.6	10	2000	0.025 (0.020 – 0.030)	50
		2	20	3200	0.035 (0.025 – 0.040)	110
		2.5	20	2600	0.040 (0.030 – 0.050)	105
		3.2	20	2000	0.050 (0.040 – 0.070)	100
		4	30	2400	0.070 (0.050 – 0.080)	170
		5	30	1900	0.080 (0.060 – 0.100)	150
		6.3	30	1500	0.090 (0.080 – 0.110)	135
		8	40	1600	0.120 (0.100 – 0.130)	190
		10	40	1300	0.150 (0.130 – 0.170)	195
		12	40	1100	0.180 (0.150 – 0.200)	200

OPERATIONAL GUIDANCE

OPERATIONAL GUIDANCE FOR THE MHS L/D ≥ 10

FLAT FACE DRILLING
DRILLING A BLIND HOLE

1. Drilling a pilot hole




1. Use a drill with a larger (flatter) point angle than the super long type. Use the shortest flute possible.
   A DVAS drill with L/D = 2 can be machined up to L/D = 3 when drilling pilot holes.
2. Ensure a high precision hole is drilled for the guide.
3. Drill depth: Approx DCx3.
   (Adjust the pilot hole depth according to the length of the long type drill.)

2. Initial cutting with the long type drill




1. Penetrate the guide hole at low revolution.
   (Revolution 500 –1000min^{-1} feed rate 1000 – 2000 mm/min)
2. Stop the long type drill 1 – 3 mm short of the guide hole bottom.

3. Drill the deep hole



1. Start cutting at the recommended speed and feed with a non–peck (continuous feed) cycle.

4. Drill retraction



1. After drilling, lower the cutting revolution about 0.5 – 1 mm short of the hole end. (Revolution of around 500 – 1000min^{-1})
2. Retract the drill to the pilot hole depth starting point at a feed rate of 1000 – 2000 mm/min.
3. Finally, clear the hole at a cutting speed of 20 – 30m/min and feed rate of 0.2 – 0.3 mm/rev.

OPERATIONAL GUIDANCE

OPERATIONAL GUIDANCE FOR THE MHS L/D ≥ 10

INTERRUPTED DRILLING
DRILLING AND BREAKING THROUGH ON IRREGULAR FACES OR ANGLES

1. Spot facing



1. Machine a flat or the irregular face by using an end mill or slot drill capable of spot facing. Make the spot face diameter the same size as the required deep hole diameter.

2. Drilling a pilot hole




1. Use a drill with a larger (flatter) point angle than the super long type. Use the shortest flute possible.
2. Ensure a high precision hole is drilled for the guide.
3. Drill depth : Approx DCx2.
   (Adjust the pilot hole depth according to the length of the long type drill.)

3. Initial cutting with the long type drill




1. Penetrate the guide hole at a low revolution.
   (Revolution 500 – 1000min^{-1}, feed rate 1000 – 2000 mm/min)
2. Stop the long type drill 0.5 – 1 mm short of the guide hole bottom.

4. Drill the deep hole



1. Start cutting at the recommended speed and feed with a non–peck (continuous feed) cycle.

5. Breaking through



1. When breaking through, the cutting edge can be damaged.
2. Lower the feed rate when penetrating.

6. Drill retraction




1. Finally clear the hole at a feed rate of 0.2 – 0.3 mm/rev
   (Revolution of around 500 – 1000min^{-1}).
2. Retract the drill to the pilot hole depth starting point at a feed rate of 1000 – 2000 mm/min.

MHS


OPERATIONAL GUIDANCE

DRILL HOLDING




Thrust bearing type collet chuck holds the drill securely.

DRILL LENGTH

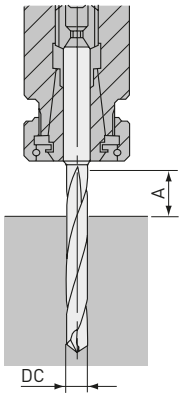

A ⩾ DC x 2

DRILL INSTALLATION

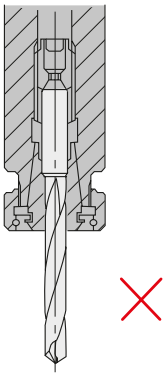

Do not clamp on the flutes.

COOLANT PRESSURE


Adjust the coolant pressure according to the type and concentration of coolant.

Drill Dia. DC	Water-soluble	Water-in-soluble
DC<2 mm	⩾ 3 MPa	⩾ 7 MPa
DC<3 mm	⩾ 2 MPa	⩾ 5 MPa

PILOT DRILL

For deep hole drilling, refer to the figure below.


L/D<40



Use DVAS○○○○X02S040

*L/D = 2 can be machined up to DCx3 when drilling pilot holes.

L/D>40



Use DVAS○○○○X07S040


COOLANT HANDLING

Small particles of swarf will jam in the oil hole of small diameter drills.
Always use a fine mesh filter as a preventive measure.


Drill Dia. DC	Fine Mesh Filter
DC<2 mm	⩽ 10μm
DC<3 mm	⩽ 20μm

THIN WORKPIECE

Support the workpiece
OK




If bending occurs
NG*



*NG – Displays chatter and vibration


INTERRUPTED CUTTING

One process
OK




1. Lower the feed when drilling the interrupted part.

Requires prior machining




1. Spot face with an end mill prior to drilling.

STEPPED HOLES



Divide the two processes.
1. Drill the larger hole first.
2. A tool for machining both chamfer and spot face can be produced to order.

BURRING AND WORKPIECE CHIPPING



1. Lower the feed rate by 50 % at the end of through cutting.
2. Change the point angle.

SYMBOLS

Recommended cutting conditions

NEW **Completely new products or expansions released in the current Spring or Autumn product launch and are not included in the latest version of the General Catalogue.**

NEW **Products or expansions that have already been introduced in one of the previous Spring or Autumn product launches but are not included in the latest General Catalogue.**

APPLICATION


Face milling


Chamfer milling


Shoulder milling with R


Face milling close to a wall


Shoulder milling


Side milling


Slot milling


Ramping


Pocket milling


Slot milling with R


Copy milling


T-Slot milling

MACHINING TYPE


Roughing


Medium cutting


Light cutting


Pre-finishing


Finishing


Fine-finishing

TOOL MATERIAL


Ultra micro grain carbide
Ultra micro grain carbide substrate material.


Cubic boron nitride
Mitsubishi Materials' original CBN material.


Ceramic
For high speed efficient machining of super alloys due to the excellent high temperature strength property.


High hardness powder metallurgy HSS
High hardness powder metallurgy HSS substrate material.


High grade high alloy HSS
High grade high alloy HSS substrate material.


Cobalt high speed steel
Cobalt high speed steel substrate material.


High speed steel
High speed steel substrate material.

SYMBOLS

COATING



SMART MIRACLE coating
New smooth and dense coating technology for high efficiency milling of difficult to cut materials.



CRN coating
Newly developed CrN coating for Copper Electrodes machining.



Violet coating
Increased tool life of 2-3 times more than TiN coated products.



DP coating
New generation coating suitable for a wide range of materials.



MIRACLE coating
The original Miracle (Al,Ti)N coating.
Also suitable for dry cutting.



(Al, Ti)N coating
(Al,Ti)N highly versatile application range.



(Al,Ti,Cr)N multi-layer coating
For carbon, alloy and hardened steels.



IMPACT MIRACLE coating
Single phase nano crystal coating technology has higher film hardness and heat resistance.



MIRACLE coating
The original MIRACLE (Al,Ti)N coating.
Also suitable for dry cutting.



VFR coating
The (AlCrSi)N/(AlTiSti)N PVD multilayer coating is ideal for machining of extremely hard materials up to 70 HRC.



DLC coating
Hardness similar to CVD diamond coating achieved with high adhesion strength.



Diamond coating
Suitable for CFRP and CFRP-aluminium materials.



Diamond coating
Suitable for graphite machining.



Diamond coating
The original CVD diamond coating.



CVD Diamond coating
Unique multi-layer micro-grain diamond crystal control technology drastically improves wear resistance and smoothness.

CUTTING EDGE PROPERTIES



Sharp corner edge
Indicates the end mill has a sharp corner edge.



Gash land
Indicates the end mill cutting edge has a protective chamfer.



Rake angle



Helix angle
Indicates the helix angle of the end mill.



Point angle
Indicates the drill point angle.



Roughing flute geometry



Variable helix



Rounded gash



Corner angle

WEB THINNING



X type point geometry
X web thinning used at the drill point.



XR type point geometry
XR web thinning used at the drill point.



S type point geometry
Easy cutting geometry.



N type point geometry
Effective when the point web is thick.



Chipbreaker

SYMBOLS

TOLERANCES



Tolerance of taper angle
Indicates the tolerance of the taper angle.



R tolerance
Indicates the radial tolerance of a ball nose end mill.



R tolerance
Indicates the radial tolerance of the corner radius.



R tolerance
Indicates the radial tolerance of a cutter with a corner radius.



Outside diameter tolerance
Indicates the diameter tolerance of the end mill.



Peak tolerance
Indicates the tolerance for the end diameter.



Shank diameter tolerance



Shank diameter tolerance



Drill tolerance / diameter

COOLANT HOLES



External coolant



Internal coolant



Internal coolant



Centered, internal coolant hole



Radial, internal coolant holes



Internal coolant holes



Internal coolant holes

EUROPEAN SALES COMPANIES

GERMANY
MITSUBISHI MATERIALS TOOLS EUROPE GMBH
Comeniusstr. 2 . 40670 Meerbusch
Phone +49 2159 91890 . Fax +49 2159 918966
Email admin@mmchg.de

UK Office
MMC HARDMETAL UK LTD
1 Centurion Court, Centurion Way
Tamworth, B77 5PN
Phone +44 1827 312312
Email sales@mitsubishicarbide.co.uk

UK Deliveries / Returns
Unit 4 B5K Business Park, Quartz Close
Tamworth, B77 4GR

SPAIN
MITSUBISHI MATERIALS ESPAÑA, S.A.
Calle Emperador 2 . 46136 Museros / Valencia
Phone +34 96 1441711
Email comercial@mmevalencia.es

FRANCE
MMC METAL FRANCE S.A.R.L.
6, Rue Jacques Monod . 91400 Orsay
Phone +33 1 69 35 53 53 . Fax +33 1 69 35 53 50
Email mmfsales@mmc-metal-france.fr

POLAND
MMC HARDMETAL POLAND SP. Z O.O.
ul. Strzegomska 42B . 53-611 Wrocław . Millennium Tower II, 2 piętro, biuro nr 2.12
Phone +48 71335 1620 . Fax +48 71335 1621
Email sales@mitsubishicarbide.com.pl

ITALY
MMC ITALIA S.R.L.
Viale Certosa 144 . 20156 Milano
Phone +39 0293 77031 . Fax +39 0293 589093
Email info@mmc-italia.it

TURKEY
MITSUBISHI MATERIALS TOOLS EUROPE GMBH ALMANYA İZMİR MERKEZ ŞUBESİ
Adalet Mahallesi Anadolu Caddesi No: 41-1 . 15001 35530 Bayraklı / İzmir
Phone +90 232 5015000 . Fax +90 232 5015007
Email info@mmchg.com.tr

www.mmc-carbide.com

DISTRIBUTED BY:

Published by: MITSUBISHI MATERIALS TOOLS EUROPE