

VFR

NEXT GENERATION END MILL SERIES
FOR MACHINING HIGH HARDNESS STEELS






VFR

END MILL SERIES FOR MILLING HIGH HARDNESS STEELS

NEW COATING TECHNOLOGY

Newly developed (AlCrSi)N multi-layer PVD coating offers higher oxidation resistance and better lubricity, together with improved wear resistance and adhesion strength. Ideal for milling extremely hard materials up to 70 HRC.

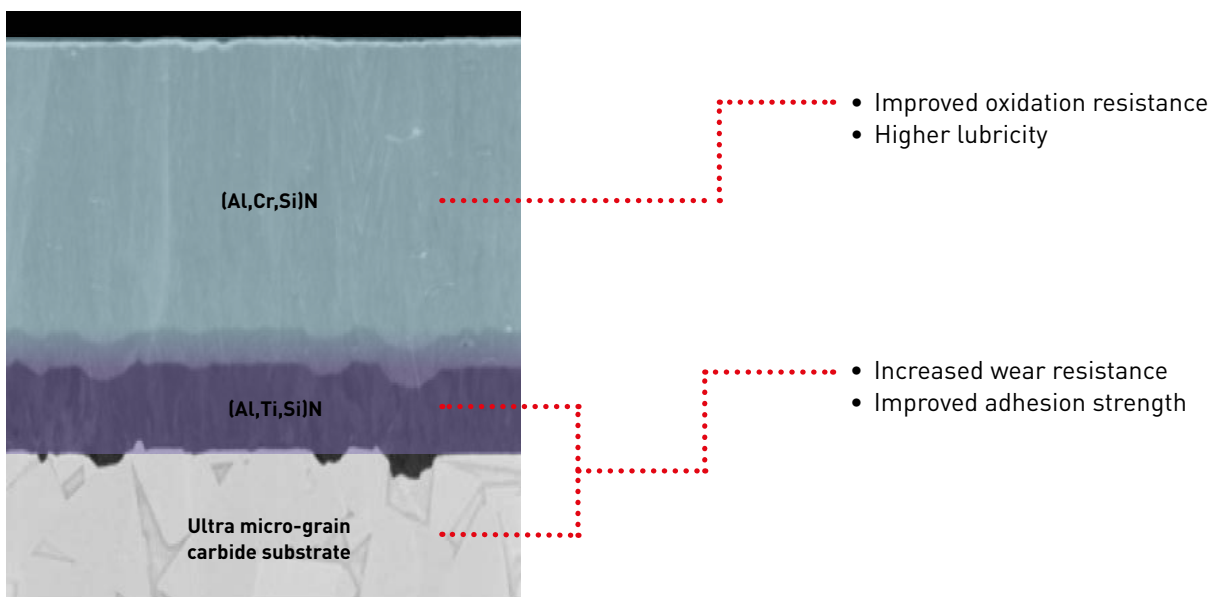

VFR4MB

HIGHER EFFICIENCIES FROM INCREASED FEED RATES WHEN FINISH MACHINING

SHORTER MACHINING TIMES WHILE MAINTAINING GOOD SURFACE FINISHES




VERSATILE 4 FLUTE DESIGN

All 4 flutes extend from the centre to the periphery. This enables high feeds at any cutting angle and negates the need to calculate different machining conditions.




ANGLE OF INCLINATION

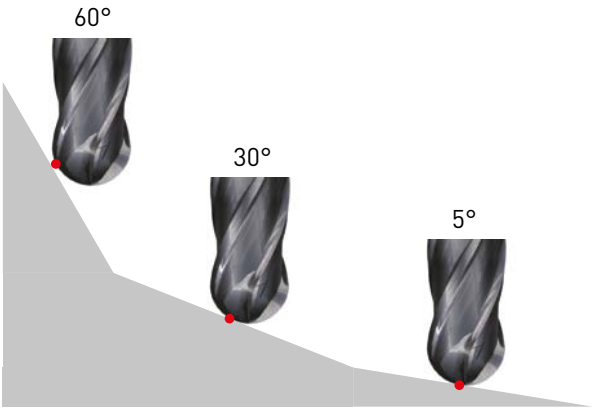

CORRECT USE OF 2 AND 4 FLUTE GEOMETRIES

2 flute geometries usually have a larger chip pocket and are better for rough machining at greater depths of cut that produce a larger volume of chips. 4-flute geometries can increase efficiency and reduce wear when used for finishing at small depths of cut. Additionally, using a 4-flute geometry is advantageous when machining harder materials at reduced depths of cut.

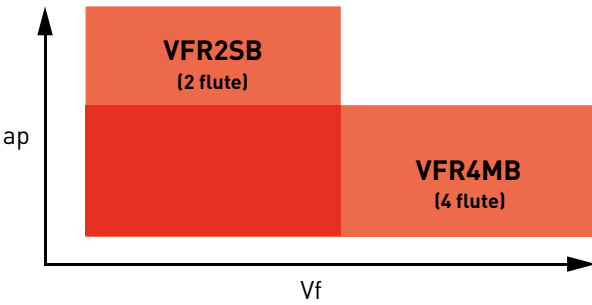


VFR4MB


CUTTING PERFORMANCE

COMPARISON OF THE SURFACE FINISH - MACHINING HS 6-5-3 (62HRC)


The 4-flute type is superior for high efficiency machining, but when used at the same feed rate as a 2 flute type, the quality of the finished surface can be improved.

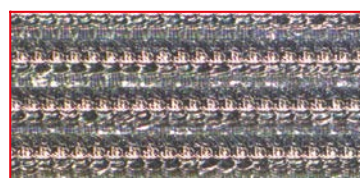


VFR4MB



Ra: 0.27 / Rz: 1.01

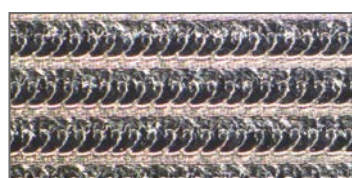

2-Flute conventional product




Ra: 0.32 / Rz: 1.62

Material	HS 6-5-3 (62HRC)
Tool	VFR4MBR0400 / DC=8 mm
n (min ⁻¹)	12000
f (mm/min)	3600
a_p (mm)	0.2
a_e (mm)	0.8
Overhang length (mm)	20
Cutting mode	Air blow Down(climb) cut


COMPARISON OF WEAR RESISTANCE SURFACE - MACHINING PMHS7-7-7-11 (69HRC)

IMPACT MIRACLE REVOLUTION end mills demonstrate excellent wear resistance even when machining high hardness workpiece materials.

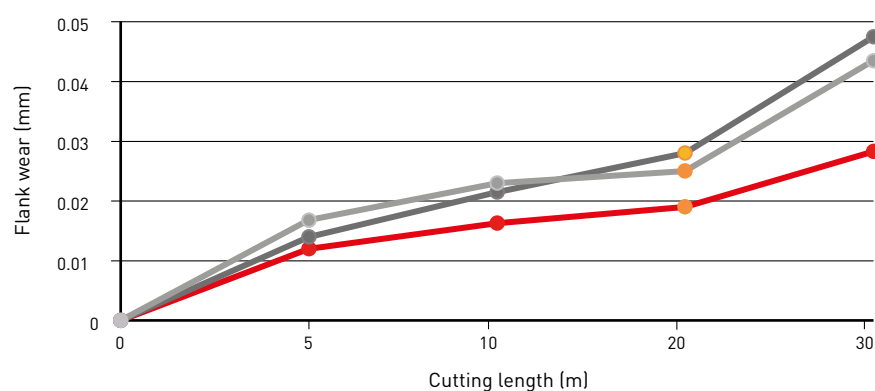

Material	PMHS7-7-7-11 (69HRC)
Tool	VFR4MBR0100 / DC=2mm
n (min ⁻¹)	16000
f (mm/min)	1200
a_p (mm)	0.06
a_e (mm)	0.2
Overhang length (mm)	17
Cutting mode	Air blow Down(climb) cut
Machine	Vertical MC

Taken after a cutting length of 20 m



VFR4MB



Conventional A



Conventional B

VFR2XLB

IDEAL FOR FINISHING

Precise machining of vertical walls is possible due to a back taper and a strong, seamless ball nose cutting edge geometry.



BALL NOSE OPTIMISATION

Ideal centre flute geometry for finish machining.

RAKE ANGLE OPTIMISATION


Optimum geometry provides a sharp edge together with good fracture resistance that enables excellent surface finishes.

STRONG BACK TAPER

Reduces chatter and vibration when machining vertical walls.

CUTTING PERFORMANCE

Machining 1.3344 (62HRC) – Comparison of wear resistance.
Greatly improved wear resistance for high-precision machining.

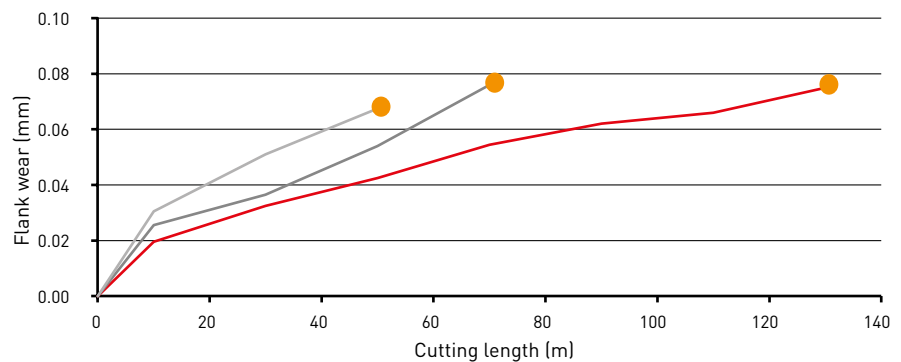

Material	1.3344 (62HRC)
Tool	VFR2XLB R0100N120
n (min ⁻¹)	1600
f (mm/min)	1600
f_z (mm/t.)	0.05
a_p (mm)	0.05 x 10
a_e (mm)	0.1 x 10
Overhang length (mm)	18
Cutting mode	Air blow
Machine	Vertical MC (HSK-E32)



VFR2XLB



Conventional A



Conventional B

VFR

CLASSIFICATION

Product code		Shape	DC	P	H	M	S	N	
BALL NOSE END MILLS									
VFR4MB	Ball nose, medium cut length, 4 flute		1-12	○	◎				7
VFR2XLB	Ball nose, 2 Flute, long neck		0.2-6	○	◎				9
VFR2SSB	Ball nose, 2 flute, short cut length, short shank		1-12	○	◎				15
VFR2SB	Ball nose, 2 flute, short cut length		0.2-20	○	◎				17
VFR2SBF	Ball nose, 2 flute, short cut length, for mirror finishing		1-6	○	◎				21
RADIUS END MILLS									
VFRPSRB	Corner radius, short cut length, long neck	 	0.5-12	○	◎				23

VFR4MB



30°




BALL NOSE, MEDIUM CUT LENGTH, 4 FLUTE


H



1

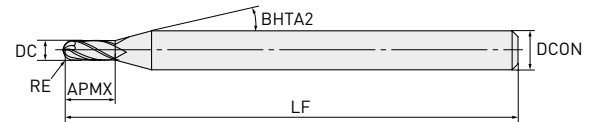

2



RE

 ± 0.010 DCON = 6 $8 \leq \text{DCON} \leq 10$ DCON = 12

0	0	0
- 0.008	- 0.009	- 0.011

- The 4 flute geometry with a cutting edge extending to the centre achieves a long tool life and enables high efficiency machining.


Order number	Stock	RE	DC	APMX	LF	BHTA2	DCON	ZEFP	Type
VFR4MBR0050	●	0.5	1	2.5	50	15	6	4	1
VFR4MBR0100	●	1	2	6	60	15	6	4	1
VFR4MBR0150	●	1.5	3	8	70	15	6	4	1
VFR4MBR0200	●	2	4	8	70	15	6	4	1
VFR4MBR0250	●	2.5	5	12	80	15	6	4	1
VFR4MBR0300	●	3	6	12	80	—	6	4	2
VFR4MBR0400	●	4	8	14	90	—	8	4	2
VFR4MBR0500	●	5	10	18	100	—	10	4	2
VFR4MBR0600	●	6	12	22	110	—	12	4	2



VFR4MB

RECOMMENDED CUTTING CONDITIONS

Material	RE	$\alpha \leq 15^\circ$		$\alpha > 15^\circ$		ap	ae
		n	f	n	f		
Hardened steel (45-55 HRC)	0.5	40000	8000	40000	3800	0.06	0.10
	1.0	40000	9600	40000	5600	0.11	0.20
	1.5	40000	12000	32000	5600	0.13	0.30
	2.0	32000	11000	24000	4700	0.15	0.40
	2.5	25000	9000	19000	3800	0.20	0.50
	3.0	21000	8400	15000	3400	0.25	0.60
	4.0	16000	6400	12000	2600	0.30	0.80
	5.0	13000	5200	9600	2200	0.50	1.00
	6.0	9000	3600	7200	1700	0.50	1.20
H Hardened steel (55-65 HRC)	0.5	40000	5600	40000	3100	0.05	0.10
	1.0	40000	8000	28000	3100	0.10	0.20
	1.5	32000	7700	19000	2900	0.12	0.30
	2.0	24000	6200	14000	2500	0.13	0.40
	2.5	19000	5300	12000	2200	0.15	0.50
	3.0	16000	4800	9600	2000	0.20	0.60
	4.0	12000	3600	7200	1600	0.20	0.80
	5.0	10000	3200	5800	1300	0.20	1.00
	6.0	7000	2200	4300	940	0.30	1.20
Hardened steel (65-70 HRC)	0.5	40000	4700	32000	1700	0.03	0.10
	1.0	24000	5000	16000	1200	0.06	0.20
	1.5	16000	4200	11000	1100	0.07	0.30
	2.0	12000	3100	8000	1000	0.08	0.40
	2.5	9600	2700	6000	780	0.08	0.50
	3.0	8000	2300	5000	780	0.09	0.60
	4.0	6000	1900	4000	620	0.09	0.80
	5.0	4800	1500	3000	550	0.10	1.00
	6.0	3600	1100	2200	400	0.10	1.20




If the depth of cut is shallow, the revolution and feed rate can be increased.

Please reduce the feed rate when the surface finish is important.

If the rigidity of the machine or the workpiece materials installation is very low, or chattering and noise are generated, please adjust the revolution, feed rate and depth of cut accordingly.

α is the inclination angle of the machined surface.





ae:Pick Feed

VFR2XLB



BALL NOSE, 2 FLUTE, LONG NECK

H

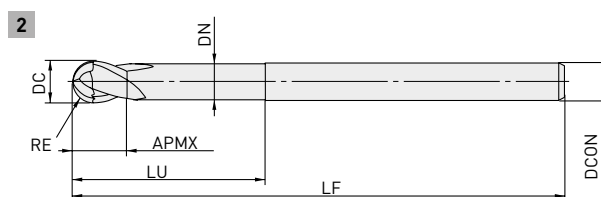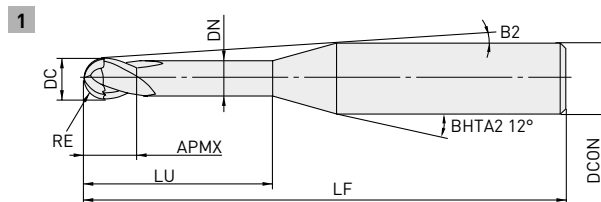

RE ≤ 3


±0.005



4 ≤ DCON ≤ 6

0

- 0.005

Effective length
for inclined angle

- Precise machining of vertical walls is possible due to a back taper and a strong, seamless ball nose cutting edge geometry.

Order number	Stock	RE	DC	APMX	LU	DN	LF	DCON	B2	ZEFP	Type	Effective length for inclined angle			
												0.5°	1°	2°	3°
VFR2XLB0010N005	●	0.1	0.2	0.15	0.5	0.18	50	4	11.5°	2	1	0.5	0.5	0.6	0.7
VFR2XLB0010N010	●	0.1	0.2	0.15	1	0.18	50	4	10.9°	2	1	1	1.1	1.2	1.3
VFR2XLB0015N010	●	0.15	0.3	0.24	1	0.28	50	4	10.9°	2	1	1	1.1	1.2	1.3
VFR2XLB0015N015	●	0.15	0.3	0.24	1.5	0.28	50	4	10.4°	2	1	1.6	1.6	1.8	2
VFR2XLB0015N020	●	0.15	0.3	0.24	2	0.28	50	4	9.9°	2	1	2.1	2.2	2.4	2.6
VFR2XLB0020N010	●	0.2	0.4	0.3	1	0.37	50	4	11°	2	1	1	1.1	1.2	1.3
VFR2XLB0020N015	●	0.2	0.4	0.3	1.5	0.37	50	4	10.4°	2	1	1.5	1.6	1.7	1.9
VFR2XLB0020N020	●	0.2	0.4	0.3	2	0.37	50	4	9.9°	2	1	2.1	2.2	2.3	2.6
VFR2XLB0020N025	●	0.2	0.4	0.3	2.5	0.37	50	4	9.5°	2	1	2.6	2.7	2.9	3.3
VFR2XLB0020N030	●	0.2	0.4	0.3	3	0.37	50	4	9.1°	2	1	3.1	3.2	3.5	3.9
VFR2XLB0020N040	●	0.2	0.4	0.3	4	0.37	50	4	8.4°	2	1	4.2	4.3	4.7	5.2
VFR2XLB0025N015	●	0.25	0.5	0.37	1.5	0.47	50	4	10.4°	2	1	1.5	1.6	1.7	1.9
VFR2XLB0025N020	●	0.25	0.5	0.37	2	0.47	50	4	9.9°	2	1	2.1	2.1	2.3	2.6
VFR2XLB0025N025	●	0.25	0.5	0.37	2.5	0.47	50	4	9.5°	2	1	2.6	2.7	2.9	3.2
VFR2XLB0025N030	●	0.25	0.5	0.37	3	0.47	50	4	9.1°	2	1	3.1	3.2	3.5	3.9
VFR2XLB0025N040	●	0.25	0.5	0.37	4	0.47	50	4	8.3°	2	1	4.1	4.3	4.7	5.2
VFR2XLB0030N020	●	0.3	0.6	0.45	2	0.57	50	4	9.9°	2	1	2.1	2.2	2.4	2.6
VFR2XLB0030N020S06	●	0.3	0.6	0.45	2	0.57	50	6	10.6°	2	1	2.1	2.2	2.4	2.6
VFR2XLB0030N030	●	0.3	0.6	0.45	3	0.57	50	4	9°	2	1	3.1	3.3	3.6	4
VFR2XLB0030N030S06	●	0.3	0.6	0.45	3	0.57	50	6	9.9°	2	1	3.1	3.3	3.6	4

The colour of the coating on the VFR2XLB items is different from other end mills in the VFR series.

VFR2XLB – BALL NOSE, 2 FLUTE, LONG NECK

Order number	Stock	RE	DC	APMX	LU	DN	LF	DCON	B2	ZEFP	Type	Effective length for inclined angle			
												0.5°	1°	2°	3°
VFR2XLB0030N040	●	0.3	0.6	0.45	4	0.57	50	4	8.2°	2	1	4.2	4.4	4.8	5.3
VFR2XLB0030N050	●	0.3	0.6	0.45	5	0.57	50	4	7.6°	2	1	5.2	5.5	6	6.6
VFR2XLB0030N060	●	0.3	0.6	0.45	6	0.57	50	4	7.1°	2	1	6.3	6.6	7.2	7.9
VFR2XLB0040N030	●	0.4	0.8	0.6	3	0.77	50	4	8.9°	2	1	3.1	3.3	3.6	3.9
VFR2XLB0040N040	●	0.4	0.8	0.6	4	0.77	50	4	8.2°	2	1	4.2	4.4	4.8	5.2
VFR2XLB0040N060	●	0.4	0.8	0.6	6	0.77	50	4	6.9°	2	1	6.3	6.5	7.2	7.9
VFR2XLB0040N080	●	0.4	0.8	0.6	8	0.77	50	4	6°	2	1	8.4	8.7	9.5	10.6
VFR2XLB0050N030	●	0.5	1	0.75	3	0.96	50	4	8.7°	2	1	3.2	3.4	3.7	4.1
VFR2XLB0050N030S06	●	0.5	1	0.75	3	0.96	50	6	9.8°	2	1	3.2	3.4	3.7	4.1
VFR2XLB0050N040	●	0.5	1	0.75	4	0.96	50	4	7.9°	2	1	4.3	4.5	4.9	5.4
VFR2XLB0050N040S06	●	0.5	1	0.75	4	0.96	50	6	9.2°	2	1	4.3	4.5	4.9	5.4
VFR2XLB0050N060	●	0.5	1	0.75	6	0.96	50	4	6.7°	2	1	6.3	6.5	7.2	7.9
VFR2XLB0050N060S06	●	0.5	1	0.75	6	0.96	50	6	8.2°	2	1	6.3	6.5	7.2	7.9
VFR2XLB0050N080	●	0.5	1	0.75	8	0.96	50	4	5.8°	2	1	8.5	8.9	9.7	10.7
VFR2XLB0050N100	●	0.5	1	0.75	10	0.96	50	4	5.1°	2	1	10.6	11.1	12.1	13.4
VFR2XLB0050N120	●	0.5	1	0.75	12	0.96	50	4	4.6°	2	1	12.7	13.2	14.5	16
VFR2XLB0075N060	●	0.75	1.5	1.1	6	1.44	50	4	6.3°	2	1	6.3	6.6	7.2	7.9
VFR2XLB0075N060S06	●	0.75	1.5	1.1	6	1.44	50	6	8°	2	1	6.3	6.6	7.2	7.9
VFR2XLB0075N080	●	0.75	1.5	1.1	8	1.44	50	4	5.4°	2	1	8.4	8.8	9.6	10.6
VFR2XLB0075N080S06	●	0.75	1.5	1.1	8	1.44	50	6	7.2°	2	1	8.4	8.8	9.6	10.6
VFR2XLB0075N100	●	0.75	1.5	1.1	10	1.44	50	4	4.7°	2	1	10.5	11	12	13.2
VFR2XLB0075N120	●	0.75	1.5	1.1	12	1.44	50	4	4.2°	2	1	12.6	13.1	14.4	15.9
VFR2XLB0075N140	●	0.75	1.5	1.1	14	1.44	50	4	3.8°	2	1	14.7	15.3	16.8	18.5
VFR2XLB0075N160	●	0.75	1.5	1.1	16	1.44	60	4	3.4°	2	1	16.8	17.5	19.2	21.2
VFR2XLB0100N060	●	1	2	1.5	6	1.94	50	4	5.8°	2	1	6.3	6.6	7.1	7.8
VFR2XLB0100N060S06	●	1	2	1.5	6	1.94	50	6	7.8°	2	1	6.3	6.6	7.1	7.8
VFR2XLB0100N080	●	1	2	1.5	8	1.94	50	4	4.8°	2	1	8.4	8.8	9.5	10.5
VFR2XLB0100N080S06	●	1	2	1.5	8	1.94	50	6	6.9°	2	1	8.4	8.8	9.5	10.5
VFR2XLB0100N100	●	1	2	1.5	10	1.94	50	4	4.2°	2	1	10.5	10.9	11.9	13.1
VFR2XLB0100N100S06	●	1	2	1.5	10	1.94	50	6	6.2°	2	1	10.5	10.9	11.9	13.1
VFR2XLB0100N120	●	1	2	1.5	12	1.94	50	4	3.6°	2	1	12.6	13.1	14.3	15.8
VFR2XLB0100N120S06	●	1	2	1.5	12	1.94	50	6	5.6°	2	1	12.6	13.1	14.3	15.8
VFR2XLB0100N160	●	1	2	1.5	16	1.94	60	4	2.9°	2	1	16.8	17.5	19.1	*
VFR2XLB0100N160S06	●	1	2	1.5	16	1.94	60	6	4.7°	2	1	16.8	17.5	19.1	21.1
VFR2XLB0100N200	●	1	2	1.5	20	1.94	60	4	2.4°	2	1	20.9	21.8	23.9	*
VFR2XLB0100N200S06	●	1	2	1.5	20	1.94	60	6	4°	2	1	20.9	21.8	23.9	26.4
VFR2XLB0125N100	●	1.25	2.5	1.9	10	2.4	60	4	3.5°	2	1	10.4	10.8	11.8	12.9
VFR2XLB0125N150	●	1.25	2.5	1.9	15	2.4	60	4	2.5°	2	1	15.6	16.3	17.8	*
VFR2XLB0150N100	●	1.5	3	2.3	10	2.9	60	6	5.5°	2	1	10.4	10.8	11.7	12.9
VFR2XLB0150N120	●	1.5	3	2.3	12	2.9	60	6	4.9°	2	1	12.5	13	14.1	15.5
VFR2XLB0150N160	●	1.5	3	2.3	16	2.9	70	6	4°	2	1	16.7	17.3	18.9	20.8
VFR2XLB0150N200	●	1.5	3	2.3	20	2.9	70	6	3.4°	2	1	20.8	21.7	23.7	26.1
VFR2XLB0150N250	●	1.5	3	2.3	25	2.9	70	6	2.8°	2	1	26.1	27.2	29.7	*
VFR2XLB0150N300	●	1.5	3	2.3	30	2.9	70	6	2.5°	2	1	31.3	32.6	35.7	*

The colour of the coating on the VFR2XLB items is different from other end mills in the VFR series.

No interference

VFR2XLB – BALL NOSE, 2 FLUTE, LONG NECK

Order number	Stock	RE	DC	APMX	LU	DN	LF	DCON	B2	ZEFP	Type	Effective length for inclined angle			
												0.5°	1°	2°	3°
VFR2XLB0200N100	●	2	4	3	10	3.9	70	6	4.5°	2	1	10.4	10.8	11.6	12.7
VFR2XLB0200N120	●	2	4	3	12	3.9	70	6	3.9°	2	1	12.5	12.9	14	15.4
VFR2XLB0200N160	●	2	4	3	16	3.9	70	6	3.1°	2	1	16.6	17.3	18.8	20.7
VFR2XLB0200N200	●	2	4	3	20	3.9	70	6	2.6°	2	1	20.8	21.7	23.6	*
VFR2XLB0200N250	●	2	4	3	25	3.9	70	6	2.1°	2	1	26	27.1	29.6	*
VFR2XLB0200N300	●	2	4	3	30	3.9	70	6	1.8°	2	1	31.2	32.6	*	*
VFR2XLB0250N200	●	2.5	5	3.8	20	4.9	70	6	1.5°	2	1	20.8	21.6	*	*
VFR2XLB0250N250	●	2.5	5	3.8	25	4.9	70	6	1.2°	2	1	26	27.1	*	*
VFR2XLB0300N180	●	3	6	6	18	5.85	80	6	—	2	2	*	*	*	*
VFR2XLB0300N300	●	3	6	6	30	5.85	80	6	—	2	2	*	*	*	*

The colour of the coating on the VFR2XLB items is different from other end mills in the VFR series.

No interference



VFR2XLB

RECOMMENDED CUTTING CONDITIONS


Material	RE	LU	n	f	ap	ae
H Hardened steel (45-55 HRC)	0.1	0.5	40000	300	0.003	0.01
	0.1	1	40000	300	0.002	0.01
	0.15	1	40000	500	0.007	0.015
	0.15	1.5	40000	500	0.005	0.015
	0.15	2	40000	500	0.003	0.015
	0.2	1	40000	1400	0.015	0.02
	0.2	1.5	40000	1000	0.01	0.02
	0.2	2	40000	1000	0.01	0.02
	0.2	2.5	40000	700	0.005	0.02
	0.2	3	40000	700	0.005	0.02
	0.2	4	40000	600	0.004	0.02
	0.25	1.5	40000	2000	0.02	0.025
	0.25	2	40000	2000	0.02	0.025
	0.25	2.5	40000	1500	0.015	0.025
	0.25	3	40000	1200	0.015	0.025
	0.25	4	36000	900	0.1	0.025
	0.3	2	40000	2800	0.03	0.03
	0.3	3	40000	2800	0.03	0.03
	0.3	4	35000	2000	0.02	0.03
	0.3	5	30000	1000	0.01	0.03
	0.3	6	30000	800	0.008	0.03
	0.4	3	40000	3000	0.04	0.04
	0.4	4	40000	3000	0.02	0.04
	0.4	6	30000	1600	0.02	0.04
	0.4	8	25000	1000	0.01	0.04
	0.5	3	40000	4000	0.05	0.05
	0.5	4	40000	4000	0.05	0.05
	0.5	6	35000	2000	0.03	0.05
	0.5	8	30000	1600	0.02	0.05
	0.5	10	20000	1000	0.01	0.05
	0.5	12	20000	1000	0.01	0.05
	0.75	6	40000	5000	0.07	0.075
	0.75	8	40000	5000	0.07	0.075
	0.75	10	40000	4500	0.06	0.075
	0.75	12	32000	3400	0.04	0.075
	0.75	14	16000	1500	0.04	0.075
	0.75	16	13000	1200	0.03	0.075
	1	6	40000	6000	0.1	0.1
	1	8	40000	5000	0.1	0.1
	1	10	40000	5000	0.08	0.1
	1	12	40000	5000	0.08	0.1
	1	16	32000	3500	0.05	0.1
	1	20	10000	1000	0.04	0.1
	1.25	10	36000	5000	0.12	0.25
	1.25	15	36000	4600	0.08	0.25
	1.5	10	32000	5100	0.15	0.3
	1.5	12	32000	5100	0.13	0.3

VFR2XLB

Material	RE	LU	n	f	ap	ae
H Hardened steel (45-55 HRC)	1.5	16	32000	4500	0.1	0.3
	1.5	20	27000	3800	0.1	0.3
	1.5	25	21000	2700	0.08	0.3
	1.5	30	9000	1000	0.08	0.3
	2	10	24000	4800	0.2	0.4
	2	12	24000	4800	0.2	0.4
	2	16	24000	3800	0.15	0.4
	2	20	24000	3800	0.15	0.4
	2	25	24000	3800	0.15	0.4
	2	30	24000	3000	0.1	0.4
	2.5	20	19000	3400	0.2	0.5
	2.5	25	19000	3400	0.2	0.5
	3	18	16000	3500	0.25	0.6
	3	30	16000	3500	0.2	0.6
H Hardened steel (55-70 HRC)	0.1	0.5	40000	300	0.002	0.01
	0.1	1	40000	300	0.002	0.01
	0.15	1	40000	500	0.005	0.015
	0.15	1.5	40000	500	0.003	0.015
	0.15	2	40000	500	0.002	0.015
	0.2	1	40000	1400	0.01	0.02
	0.2	1.5	40000	1000	0.006	0.02
	0.2	2	40000	1000	0.006	0.02
	0.2	2.5	40000	700	0.003	0.02
	0.2	3	40000	700	0.003	0.02
	0.2	4	40000	500	0.003	0.02
	0.25	1.5	40000	2000	0.015	0.025
	0.25	2	40000	2000	0.015	0.025
	0.25	2.5	40000	1500	0.01	0.025
	0.25	3	40000	1200	0.01	0.025
	0.25	4	36000	900	0.007	0.025
	0.3	2	40000	2800	0.02	0.03
	0.3	3	40000	2800	0.02	0.03
	0.3	4	35000	2000	0.015	0.03
	0.3	5	30000	1000	0.007	0.03
	0.3	6	30000	800	0.005	0.03
	0.4	3	40000	3000	0.03	0.04
	0.4	4	40000	3000	0.015	0.04
	0.4	6	30000	1600	0.01	0.04
	0.4	8	25000	1000	0.007	0.04
	0.5	3	40000	4000	0.04	0.05
	0.5	4	40000	4000	0.04	0.05
	0.5	6	35000	2000	0.02	0.05
	0.5	8	30000	1600	0.01	0.05
	0.5	10	20000	1000	0.01	0.05
	0.5	12	20000	800	0.008	0.05
	0.75	6	40000	4000	0.06	0.075
	0.75	8	40000	3500	0.06	0.075
	0.75	10	40000	2400	0.06	0.075
	0.75	12	32000	2000	0.04	0.075
	0.75	14	16000	1200	0.03	0.075

VFR2XLB

Material	RE	LU	n	f	ap	ae
H Hardened steel (55-70 HRC)	0.75	16	13000	1200	0.02	0.075
	1	6	40000	3400	0.1	0.1
	1	8	40000	3000	0.1	0.1
	1	10	40000	3000	0.07	0.1
	1	12	40000	2600	0.05	0.1
	1	16	32000	1700	0.03	0.1
	1	20	10000	1000	0.03	0.1
	1.25	10	36000	2600	0.11	0.25
	1.25	15	36000	2000	0.075	0.25
	1.5	10	32000	2200	0.15	0.3
	1.5	12	32000	2200	0.13	0.3
	1.5	16	32000	1800	0.1	0.3
	1.5	20	27000	1600	0.06	0.3
	1.5	25	21000	1200	0.06	0.3
	1.5	30	9000	700	0.05	0.3
	2	10	24000	2200	0.2	0.4
	2	12	24000	2200	0.2	0.4
	2	16	24000	1500	0.15	0.4
	2	20	24000	1500	0.15	0.4
	2	25	24000	1100	0.1	0.4
	2	30	24000	1100	0.08	0.4
	2.5	20	19000	1400	0.2	0.5
	2.5	25	19000	1400	0.2	0.5
	3	18	16000	1000	0.2	0.6
	3	30	16000	1000	0.2	0.6



When the inclination angle of machined surface is large, or machining with large cutting loads such as in a corner area, reduce the revolution and feed rate.

If the depth of cut is shallow, the revolution and feed rate can be increased.

Cutting conditions may differ considerably due to the tool overhang, depth of cut and machine tool condition.

Please use the table above as a reference starting point.

VFR2SSB



BALL NOSE, 2 FLUTE, SHORT CUT LENGTH, SHORT SHANK

H



RE ≤ 6

±0.005



4 ≤ DCON ≤ 6 8 ≤ DCON ≤ 10 DCON = 12

0

0


0

- 0.005


- 0.006

- 0.008

1

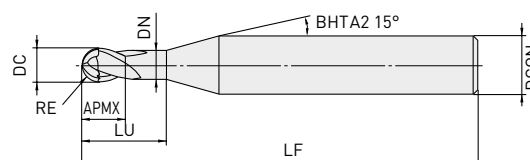

2

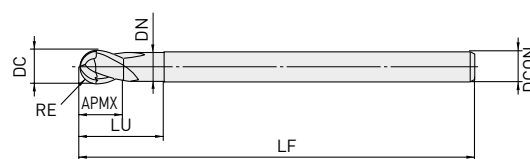


Order number	Stock	RE	DC	APMX	LU	DN	LF	DCON	ZEFP	Type
VFR2SSBR0050S04	●	0.5	1	1	2	0.94	40	4	2	1
VFR2SSBR0050	●	0.5	1	1	2	0.94	40	6	2	1
VFR2SSBR0075S04	●	0.75	1.5	1.5	3	1.44	40	4	2	1
VFR2SSBR0075	●	0.75	1.5	1.5	3	1.44	40	6	2	1
VFR2SSBR0100	●	1	2	2	4	1.9	45	6	2	1
VFR2SSBR0150	●	1.5	3	3	6	2.9	45	6	2	1
VFR2SSBR0200	●	2	4	4	8	3.9	45	6	2	1
VFR2SSBR0250	●	2.5	5	5	10	4.9	50	6	2	1
VFR2SSBR0300	●	3	6	6	12	5.85	50	6	2	2
VFR2SSBR0400	●	4	8	8	14	7.85	60	8	2	2
VFR2SSBR0500	●	5	10	10	18	9.7	70	10	2	2
VFR2SSBR0600	●	6	12	12	22	11.7	75	12	2	2

VFR2SSB


RECOMMENDED CUTTING CONDITIONS

Material		RE	Inclination angle α < 15°		Inclination angle α > 15°		ap	ae
			n	f	n	f		
H	Hardened steel (45–55HRC)	R 0.5	40000	8000	40000	3200	0.06	0.10
		R 0.75	40000	9600	40000	4000	0.09	0.15
		R 1	40000	9600	39000	4700	0.11	0.20
		R 1.5	40000	12000	27000	4300	0.13	0.30
		R 2	32000	10880	20000	3600	0.15	0.40
		R 2.5	25000	9000	16000	2900	0.20	0.50
		R 3	21000	8400	13000	2600	0.25	0.60
		R 4	16000	6400	10000	2000	0.30	0.80
		R 5	13000	5200	8000	1700	0.50	1.00
		R 6	9000	3600	6000	1300	0.50	1.20
	Hardened steel (55–62HRC)	R 0.5	40000	5600	40000	2400	0.05	0.10
		R 0.75	40000	7200	32000	2500	0.075	0.15
		R 1	40000	8000	24000	2400	0.1	0.20
		R 1.5	32000	7700	16000	2200	0.12	0.30
		R 2	24000	6200	12000	1900	0.13	0.40
		R 2.5	19000	5300	9600	1700	0.15	0.50
		R 3	16000	4800	8000	1600	0.2	0.60
		R 4	12000	3600	6000	1200	0.2	0.80
		R 5	10000	3200	4800	960	0.2	1.00
		R 6	7000	2200	3600	720	0.3	1.20
	Hardened steel (62–70HRC)	R 0.5	40000	3600	32000	1300	0.04	0.10
		R 0.75	32000	4500	21000	1200	0.05	0.15
		R 1	24000	3800	16000	1000	0.07	0.20
		R 1.5	16000	3200	11000	880	0.09	0.30
		R 2	12000	2400	8000	800	0.1	0.40
		R 2.5	9600	2100	6000	600	0.1	0.50
		R 3	8000	1700	5000	600	0.11	0.60
R 4		6000	1400	4000	480	0.11	0.80	
R 5		4800	1100	3000	420	0.12	1.00	
R 6		3600	860	2200	310	0.12	1.20	



α is the inclination angle of the machined surface.

If the rigidity of the machine or the work materials installation is very low, or chattering and noise are generated, reduce the revolutions and feed rate proportionately.



VFR2SB




BALL NOSE, 2 FLUTE, SHORT CUT LENGTH


H




1

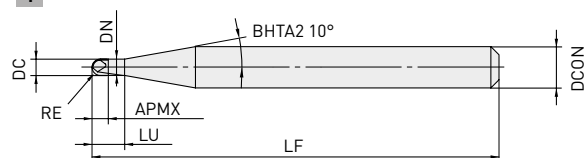


2

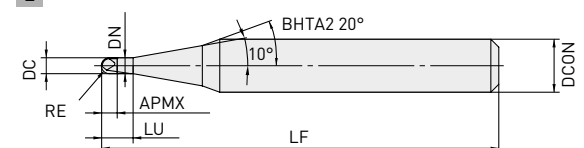

3

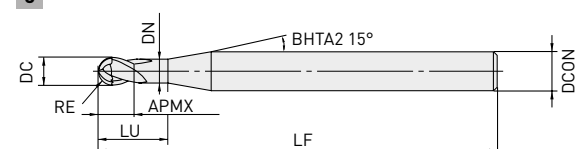

4



RE ≤ 6

RE > 6

±0.005

±0.010



DCON=3 4 ≤ DCON ≤ 6 8 ≤ DCON ≤ 10 DCON=12,16 DCON=20

0

0

0

0

0

0

- 0.004

- 0.005

- 0.006

- 0.008

- 0.009

Order number	Stock	RE	DC	APMX	LU	DN	LF	DCON	ZEFP	Type
VFR2SBR0010	●	0.1	0.2	0.2	0.4	0.17	45	4	2	1
VFR2SBR0010S06	●	0.1	0.2	0.2	0.4	0.17	50	6	2	2
VFR2SBR0015	●	0.15	0.3	0.3	0.6	0.27	45	4	2	1
VFR2SBR0015S06	●	0.15	0.3	0.3	0.6	0.27	50	6	2	2
VFR2SBR0020	●	0.2	0.4	0.4	0.8	0.36	45	4	2	1
VFR2SBR0020S06	●	0.2	0.4	0.4	0.8	0.36	50	6	2	2
VFR2SBR0030	●	0.3	0.6	0.6	1.2	0.56	45	4	2	3
VFR2SBR0030S06	●	0.3	0.6	0.6	1.2	0.56	50	6	2	3
VFR2SBR0040	●	0.4	0.8	0.8	1.6	0.76	45	4	2	3
VFR2SBR0040S06	●	0.4	0.8	0.8	1.6	0.76	50	6	2	3
VFR2SBR0050	●	0.5	1	1	2	0.94	45	4	2	3
VFR2SBR0050S06	●	0.5	1	1	2	0.94	50	6	2	3
VFR2SBR0060	●	0.6	1.2	1.2	2.4	1.14	45	4	2	3
VFR2SBR0060S06	●	0.6	1.2	1.2	2.4	1.14	50	6	2	3

VFR2SB – BALL NOSE, 2 FLUTE, SHORT CUT LENGTH

Order number	Stock	RE	DC	APMX	LU	DN	LF	DCON	ZEFP	Type
VFR2SBR0070	●	0.7	1.4	1.4	2.8	1.34	45	4	2	3
VFR2SBR0070S06	●	0.7	1.4	1.4	2.8	1.34	50	6	2	3
VFR2SBR0075	●	0.75	1.5	1.5	3	1.44	45	4	2	3
VFR2SBR0075S06	●	0.75	1.5	1.5	3	1.44	50	6	2	3
VFR2SBR0080	●	0.8	1.6	1.6	3.2	1.54	45	4	2	3
VFR2SBR0080S06	●	0.8	1.6	1.6	3.2	1.54	50	6	2	3
VFR2SBR0090	●	0.9	1.8	1.8	3.6	1.74	45	4	2	3
VFR2SBR0090S06	●	0.9	1.8	1.8	3.6	1.74	50	6	2	3
VFR2SBR0100	●	1	2	2	4	1.9	50	4	2	3
VFR2SBR0100S06	●	1	2	2	4	1.9	60	6	2	3
VFR2SBR0125S06	●	1.25	2.5	2.5	5	2.4	60	6	2	3
VFR2SBR0150S03	●	1.5	3	3	—	—	60	3	2	4
VFR2SBR0150	●	1.5	3	3	6	2.9	70	6	2	3
VFR2SBR0200S04	●	2	4	4	—	—	60	4	2	4
VFR2SBR0200	●	2	4	4	8	3.9	70	6	2	3
VFR2SBR0250	●	2.5	5	5	10	4.9	80	6	2	3
VFR2SBR0300	●	3	6	12	—	—	80	6	2	4
VFR2SBR0400	●	4	8	14	—	—	90	8	2	4
VFR2SBR0500	●	5	10	18	—	—	100	10	2	4
VFR2SBR0600	●	6	12	22	—	—	110	12	2	4
VFR2SBR0800	●	8	16	30	—	—	140	16	2	4
VFR2SBR1000	●	10	20	38	—	—	160	20	2	4


VFR2SB

RECOMMENDED CUTTING CONDITIONS

Material	RE	Inclination angle $\alpha < 15^\circ$		Inclination angle $\alpha > 15^\circ$		ap	ae
		n	f	n	f		
H Hardened steel (45–55HRC)	R 0.1	40000	320	40000	240	0.003	0.02
	R 0.15	40000	640	40000	560	0.01	0.03
	R 0.2	40000	1600	40000	1200	0.02	0.04
	R 0.3	40000	3200	40000	1600	0.03	0.06
	R 0.4	40000	6400	40000	2400	0.05	0.08
	R 0.5	40000	8000	40000	3200	0.06	0.10
	R 0.75	40000	9600	40000	4000	0.09	0.15
	R 1	40000	9600	39000	4700	0.11	0.20
	R 1.25	40000	10400	32000	4500	0.12	0.25
	R 1.5	40000	12000	27000	4300	0.13	0.30
	R 2	32000	10880	20000	3600	0.15	0.40
	R 2.5	25000	9000	16000	2900	0.20	0.50
	R 3	21000	8400	13000	2600	0.25	0.60
	R 4	16000	6400	10000	2000	0.30	0.80
	R 5	13000	5200	8000	1700	0.50	1.00
	R 6	9000	3600	6000	1300	0.50	1.20
	R 8	6000	2400	4000	1000	0.50	1.60
	R10	4500	1800	3000	780	0.50	2.00
H Hardened steel (55–62HRC)	R 0.1	40000	320	40000	160	0.003	0.02
	R 0.15	40000	640	40000	400	0.007	0.03
	R 0.2	40000	1400	40000	1000	0.015	0.04
	R 0.3	40000	2800	40000	1200	0.025	0.06
	R 0.4	40000	4000	40000	1600	0.04	0.08
	R 0.5	40000	5600	40000	2400	0.05	0.10
	R 0.75	40000	7200	32000	2500	0.075	0.15
	R 1	40000	8000	24000	2400	0.1	0.20
	R 1.25	37000	8100	19000	2300	0.11	0.25
	R 1.5	32000	7700	16000	2200	0.12	0.30
	R 2	24000	6200	12000	1900	0.13	0.40
	R 2.5	19000	5300	9600	1700	0.15	0.50
	R 3	16000	4800	8000	1600	0.2	0.60
	R 4	12000	3600	6000	1200	0.2	0.80
	R 5	10000	3200	4800	960	0.2	1.00
	R 6	7000	2200	3600	720	0.3	1.20
	R 8	5000	1600	2500	500	0.3	1.60
	R10	4000	1300	1800	360	0.3	2.00


VFR2SB

Material	RE	Inclination angle $\alpha < 15^\circ$		Inclination angle $\alpha > 15^\circ$		ap	ae
		n	f	n	f		
H Hardened steel (62-70HRC)	R 0.1	40000	320	40000	160	0.002	0.02
	R 0.15	40000	640	40000	400	0.005	0.03
	R 0.2	40000	1200	40000	1000	0.01	0.04
	R 0.3	40000	2000	40000	1200	0.02	0.06
	R 0.4	40000	2800	40000	1600	0.03	0.08
	R 0.5	40000	3600	32000	1300	0.04	0.10
	R 0.75	32000	4500	21000	1200	0.05	0.15
	R 1	24000	3800	16000	1000	0.07	0.20
	R 1.25	19000	3400	13000	1000	0.08	0.25
	R 1.5	16000	3200	11000	880	0.09	0.30
	R 2	12000	2400	8000	800	0.1	0.40
	R 2.5	9600	2100	6000	600	0.1	0.50
	R 3	8000	1700	5000	600	0.11	0.60
	R 4	6000	1400	4000	480	0.11	0.80
	R 5	4800	1100	3000	420	0.12	1.00
	R 6	3600	860	2200	310	0.12	1.20
	R 8	2500	650	1500	240	0.15	1.60
	R10	1800	470	1000	160	0.15	2.00



α is the inclination angle of the machined surface.

If the rigidity of the machine or the work materials installation is very low, or chattering and noise are generated, reduce the revolutions and feed rate proportionately.



VFR2SBF



BALL NOSE, 2 FLUTE, SHORT CUT LENGTH,
FOR MIRROR FINISHING

P

H



RE ≤ 3

±0.010




4 ≤ DCON ≤ 6


0

- 0.005

1

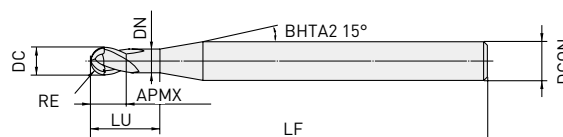

2




Order number	Stock	RE	DC	APMX	LU	DN	LF	DCON	ZEFP	Type
VFR2SBFR0050	●	0.5	1	1	2	0.94	45	4	2	1
VFR2SBFR0075	●	0.75	1.5	1.5	3	1.44	45	4	2	1
VFR2SBFR0100	●	1	2	2	4	1.9	60	6	2	1
VFR2SBFR0125	●	1.25	2.5	2.5	5	2.4	60	6	2	1
VFR2SBFR0150	●	1.5	3	3	6	2.9	70	6	2	1
VFR2SBFR0200	●	2	4	4	8	3.9	70	6	2	1
VFR2SBFR0250	●	2.5	5	5	10	4.9	80	6	2	1
VFR2SBFR0300	●	3	6	6	—	—	80	6	2	2

VFR2SBF

RECOMMENDED CUTTING CONDITIONS

Material	RE	Inclination angle $\alpha < 15^\circ$		Inclination angle $\alpha > 15^\circ$		ap	ae
		n	f	n	f		
P Pre-hardened steel (35-45HRC) Carbon steel, Alloy steel (280-350HB) Alloy steel (<350HB) Hardened steel (40-62HRC)	R 0.5	40000	800	40000	800	0.007	0.007
	R 0.75	40000	800	40000	800	0.009	0.009
	R 1.0	35000	1050	35000	1050	0.011	0.011
	R 1.25	35000	1050	35000	1050	0.013	0.013
	R 1.5	35000	1050	35000	1050	0.015	0.015
	R 2.0	25000	1000	25000	1000	0.017	0.017
	R 2.5	25000	1000	25000	1000	0.020	0.020
	R 3.0	25000	1000	25000	1000	0.020	0.020
H High hardened steel (62-70HRC)	R 0.5	40000	560	40000	560	0.005	0.005
	R 0.75	40000	560	40000	560	0.007	0.007
	R 1.0	35000	700	35000	700	0.009	0.009
	R 1.25	35000	700	35000	700	0.011	0.011
	R 1.5	35000	700	35000	700	0.013	0.013
	R 2.0	25000	750	25000	750	0.015	0.015
	R 2.5	25000	750	25000	750	0.015	0.015
	R 3.0	25000	750	25000	750	0.015	0.015




This tool is recommended for finish machining only.

Air blow or oil mist is recommended for good chip evacuation.

α is the inclination angle of the machined surface.

For profile machining such as moulds, machining conditions may differ considerably depending on the workpiece geometry, machining methods and depth of cut. Reduce the feed rate especially when machining the corner sections of a workpiece.



VFRPSRB




DC≤1 DC≥1.5

CORNER RADIUS, SHORT CUT LENGTH, LONG NECK



H



1

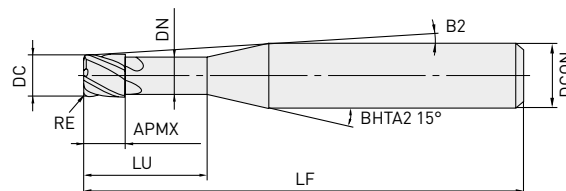

2

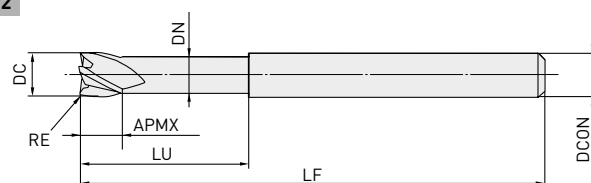Effective length
for inclined angle

0.5≤RE ≤6 8≤RE

±0.005 ±0.007



0.5≤DC ≤6 8≤RE

0 0
- 0.01 - 0.015

DCON=6 8≤DCON ≤10 12≤DCON

0 0 0
- 0.005 - 0.006 - 0.008

- Suitable for high precision machining for creating smooth surfaces on moulds and dies.

Order number	Stock	RE	DC	APMX	LU	DN	LF	DCON	B2	ZEFP	Type	Effective length for inclined angle			
												30°	1°	2°	3°
VFRPSRBD0050R005N020	●	0.05	0.5	0.5	2	0.47	50	6	12.6	4	1	2.1	2.2	2.3	2.5
VFRPSRBD0050R010N020	●	0.1	0.5	0.5	2	0.47	50	6	12.7	4	1	2.1	2.2	2.3	2.5
VFRPSRBD0060R005N020	●	0.05	0.6	0.6	2	0.57	50	6	12.5	4	1	2.1	2.2	2.4	2.6
VFRPSRBD0060R010N020	●	0.1	0.6	0.6	2	0.57	50	6	12.5	4	1	2.1	2.2	2.3	2.6
VFRPSRBD0060R010N040	●	0.1	0.6	0.6	4	0.57	50	6	10.8	4	1	4.2	4.4	4.7	5.1
VFRPSRBD0060R020N020	●	0.2	0.6	0.6	2	0.57	50	6	12.6	4	1	2.1	2.2	2.2	2.6
VFRPSRBD0080R005N040	●	0.05	0.8	0.8	4	0.77	50	6	10.7	4	1	4.2	4.4	4.7	5.1
VFRPSRBD0080R010N040	●	0.1	0.8	0.8	4	0.77	50	6	10.7	4	1	4.2	4.4	4.7	5.1
VFRPSRBD0080R020N040	●	0.2	0.8	0.8	4	0.77	50	6	10.8	4	1	4.2	4.4	4.7	5.1
VFRPSRBD0080R030N040	●	0.3	0.8	0.8	4	0.77	50	6	10.8	4	1	4.2	4.4	4.7	5
VFRPSRBD0100R005N040	●	0.05	1	1	4	0.96	50	6	10.4	4	1	4.3	4.5	4.9	5.4
VFRPSRBD0100R010N040	●	0.1	1	1	4	0.96	50	6	10.4	4	1	4.3	4.5	4.9	5.4
VFRPSRBD0100R010N060	●	0.1	1	1	6	0.96	50	6	9.1	4	1	6.4	6.7	7.3	7.9
VFRPSRBD0100R020N040	●	0.2	1	1	4	0.96	50	6	10.5	4	1	4.3	4.5	4.7	5.3
VFRPSRBD0100R020N060	●	0.2	1	1	6	0.96	50	6	9.2	4	1	6.4	6.7	7.3	7.8
VFRPSRBD0100R030N040	●	0.3	1	1	4	0.96	50	6	10.5	4	1	4.3	4.5	4.6	5.3
VFRPSRBD0100R040N040	●	0.4	1	1	4	0.96	50	6	10.6	4	1	4.3	4.5	4.5	5.3
VFRPSRBD0150R010N040	●	0.1	1.5	1.5	4	1.42	50	6	10.2	4	1	4.2	4.4	4.8	5.2

VFRPSRB – CORNER RADIUS, SHORT CUT LENGTH, LONG NECK

Order number	Stock	RE	DC	APMX	LU	DN	LF	DCON	B2	ZEFP	Type	Effective length for inclined angle			
												30°	1°	2°	3°
VFRPSRBD0150R010N060	●	0.1	1.5	1.5	6	1.42	50	6	8.8	4	1	6.3	6.6	7.1	7.7
VFRPSRBD0150R010N100	●	0.1	1.5	1.5	10	1.42	50	6	6.9	4	1	10.5	10.9	11.7	12.7
VFRPSRBD0150R020N040	●	0.2	1.5	1.5	4	1.42	50	6	10.2	4	1	4.2	4.4	4.6	5.2
VFRPSRBD0150R020N060	●	0.2	1.5	1.5	6	1.42	50	6	8.8	4	1	6.3	6.6	7.1	7.7
VFRPSRBD0150R020N100	●	0.2	1.5	1.5	10	1.42	50	6	7	4	1	10.5	10.9	11.7	12.6
VFRPSRBD0150R030N040	●	0.3	1.5	1.5	4	1.42	50	6	10.3	4	1	4.2	4.4	4.5	5.2
VFRPSRBD0150R030N060	●	0.3	1.5	1.5	6	1.42	50	6	8.9	4	1	6.3	6.6	7.1	7.6
VFRPSRBD0150R030N100	●	0.3	1.5	1.5	10	1.42	50	6	7	4	1	10.5	10.9	11.7	12.6
VFRPSRBD0150R050N040	●	0.5	1.5	1.5	4	1.42	50	6	10.5	4	1	4.2	4.4	4.3	5.1
VFRPSRBD0150R050N060	●	0.5	1.5	1.5	6	1.42	50	6	9	4	1	6.3	6.6	7.1	7.6
VFRPSRBD0150R050N100	●	0.5	1.5	1.5	10	1.42	50	6	7.1	4	1	10.5	10.9	11.7	12.6
VFRPSRBD0200R010N060	●	0.1	2	2	6	1.9	50	6	8.4	4	1	6.3	6.6	7.1	7.6
VFRPSRBD0200R010N100	●	0.1	2	2	10	1.9	50	6	6.5	4	1	10.5	10.9	11.7	12.6
VFRPSRBD0200R010N150	●	0.1	2	2	15	1.9	50	6	5.1	4	1	15.7	16.2	17.4	18.8
VFRPSRBD0200R020N060	●	0.2	2	2	6	1.9	50	6	8.4	4	1	6.3	6.6	7.1	7.6
VFRPSRBD0200R020N100	●	0.2	2	2	10	1.9	50	6	6.5	4	1	10.5	10.9	11.7	12.6
VFRPSRBD0200R020N150	●	0.2	2	2	15	1.9	50	6	5.1	4	1	15.7	16.2	17.4	18.8
VFRPSRBD0200R030N060	●	0.3	2	2	6	1.9	50	6	8.5	4	1	6.3	6.6	7	7.6
VFRPSRBD0200R030N100	●	0.3	2	2	10	1.9	50	6	6.6	4	1	10.5	10.8	11.6	12.6
VFRPSRBD0200R030N150	●	0.3	2	2	15	1.9	50	6	5.1	4	1	15.7	16.2	17.4	18.8
VFRPSRBD0200R030N200	●	0.3	2	2	20	1.9	60	6	4.2	4	1	20.8	21.5	23.1	25
VFRPSRBD0200R050N060	●	0.5	2	2	6	1.9	50	6	8.6	4	1	6.3	6.5	7	7.5
VFRPSRBD0200R050N100	●	0.5	2	2	10	1.9	50	6	6.6	4	1	10.5	10.8	11.6	12.5
VFRPSRBD0200R050N150	●	0.5	2	2	15	1.9	50	6	5.2	4	1	15.6	16.2	17.4	18.7
VFRPSRBD0200R050N200	●	0.5	2	2	20	1.9	60	6	4.2	4	1	20.8	21.5	23.1	24.9
VFRPSRBD0250R030N080	●	0.3	2.5	2.5	8	2.35	50	6	6.9	4	1	8.3	8.6	9.2	10
VFRPSRBD0250R030N150	●	0.3	2.5	2.5	15	2.35	50	6	4.7	4	1	15.6	16.1	17.3	18.7
VFRPSRBD0250R050N080	●	0.5	2.5	2.5	8	2.35	50	6	7	4	1	8.3	8.6	9.2	9.9
VFRPSRBD0250R050N150	●	0.5	2.5	2.5	15	2.35	50	6	4.7	4	1	15.6	16.1	17.3	18.6
VFRPSRBD0250R100N080	●	1	2.5	2.5	8	2.35	50	6	7.3	4	1	8.3	8.6	9.1	9.8
VFRPSRBD0300R010N100	●	0.1	3	3	10	2.85	60	6	5.5	4	1	10.4	10.8	11.6	12.5
VFRPSRBD0300R010N150	●	0.1	3	3	15	2.85	60	6	4.2	4	1	15.6	16.1	17.3	18.7
VFRPSRBD0300R020N100	●	0.2	3	3	10	2.85	60	6	5.5	4	1	10.4	10.8	11.6	12.5
VFRPSRBD0300R020N150	●	0.2	3	3	15	2.85	60	6	4.2	4	1	15.6	16.1	17.3	18.7
VFRPSRBD0300R020N200	●	0.2	3	3	20	2.85	60	6	3.4	4	1	20.7	21.5	23.1	24.9
VFRPSRBD0300R030N100	●	0.3	3	3	10	2.85	60	6	5.6	4	1	10.4	10.8	11.5	12.5
VFRPSRBD0300R030N150	●	0.3	3	3	15	2.85	60	6	4.2	4	1	15.6	16.1	17.3	18.7
VFRPSRBD0300R030N200	●	0.3	3	3	20	2.85	60	6	3.4	4	1	20.7	21.5	23	24.9
VFRPSRBD0300R050N100	●	0.5	3	3	10	2.85	60	6	5.6	4	1	10.4	10.7	11.5	12.4
VFRPSRBD0300R050N150	●	0.5	3	3	15	2.85	60	6	4.2	4	1	15.6	16.1	17.3	18.6
VFRPSRBD0300R050N200	●	0.5	3	3	20	2.85	60	6	3.4	4	1	20.7	21.4	23	24.8
VFRPSRBD0300R100N100	●	1	3	3	10	2.85	60	6	5.8	4	1	10.4	10.7	11.4	12.3
VFRPSRBD0300R100N150	●	1	3	3	15	2.85	60	6	4.3	4	1	15.5	16.1	17.2	18.5
VFRPSRBD0300R100N200	●	1	3	3	20	2.85	60	6	3.5	4	1	20.7	21.4	22.9	24.7
VFRPSRBD0400R010N120	●	0.1	4	4	12	3.85	60	6	3.6	4	1	12.5	12.9	13.9	15
VFRPSRBD0400R010N200	●	0.1	4	4	20	3.85	60	6	2.4	4	1	20.7	21.5	23.1	*
VFRPSRBD0400R020N120	●	0.2	4	4	12	3.85	60	6	3.7	4	1	12.5	12.9	13.9	15
VFRPSRBD0400R020N200	●	0.2	4	4	20	3.85	60	6	2.4	4	1	20.7	21.5	23.1	*
VFRPSRBD0400R030N120	●	0.3	4	4	12	3.85	60	6	3.7	4	1	12.5	12.9	13.8	15
VFRPSRBD0400R030N200	●	0.3	4	4	20	3.85	60	6	2.4	4	1	20.7	21.5	23	*

No interference

VFRPSRB – CORNER RADIUS, SHORT CUT LENGTH, LONG NECK

Order number	Stock	RE	DC	APMX	LU	DN	LF	DCON	B2	ZEFP	Type	Effective length for inclined angle			
												30°	1°	2°	3°
VFRPSRBD0400R030N300	●	0.3	4	4	30	3.85	70	6	1.7	4	1	31.1	32.2	*	*
VFRPSRBD0400R050N120	●	0.5	4	4	12	3.85	60	6	3.7	4	1	12.5	12.9	13.8	14.9
VFRPSRBD0400R050N200	●	0.5	4	4	20	3.85	60	6	2.5	4	1	20.7	21.4	23	*
VFRPSRBD0400R050N300	●	0.5	4	4	30	3.85	70	6	1.7	4	1	31.1	32.1	*	*
VFRPSRBD0400R100N120	●	1	4	4	12	3.85	60	6	3.8	4	1	12.4	12.8	13.7	14.8
VFRPSRBD0400R100N200	●	1	4	4	20	3.85	60	6	2.5	4	1	20.7	21.4	22.9	*
VFRPSRBD0400R100N300	●	1	4	4	30	3.85	70	6	1.7	4	1	31.1	32.1	*	*
VFRPSRBD0500R050N150	●	0.5	5	5	15	4.85	60	6	1.7	4	1	15.6	16.1	*	*
VFRPSRBD0500R100N150	●	1	5	5	15	4.85	60	6	1.8	4	1	15.5	16.1	*	*
VFRPSRBD0600R010N180	●	0.1	6	9	18	5.85	70	6	—	4	2	*	*	*	*
VFRPSRBD0600R020N180	●	0.2	6	9	18	5.85	70	6	—	4	2	*	*	*	*
VFRPSRBD0600R030N180	●	0.3	6	9	18	5.85	70	6	—	4	2	*	*	*	*
VFRPSRBD0600R050N180	●	0.5	6	9	18	5.85	70	6	—	4	2	*	*	*	*
VFRPSRBD0600R100N180	●	1	6	9	18	5.85	70	6	—	4	2	*	*	*	*
VFRPSRBD0600R200N180	●	2	6	9	18	5.85	70	6	—	4	2	*	*	*	*
VFRPSRBD0800R020N240	●	0.2	8	12	24	7.85	90	8	—	4	2	*	*	*	*
VFRPSRBD0800R030N240	●	0.3	8	12	24	7.85	90	8	—	4	2	*	*	*	*
VFRPSRBD0800R050N240	●	0.5	8	12	24	7.85	90	8	—	4	2	*	*	*	*
VFRPSRBD0800R100N240	●	1	8	12	24	7.85	90	8	—	4	2	*	*	*	*
VFRPSRBD0800R200N240	●	2	8	12	24	7.85	90	8	—	4	2	*	*	*	*
VFRPSRBD1000R030N300	●	0.3	10	15	30	9.7	100	10	—	4	2	*	*	*	*
VFRPSRBD1000R050N300	●	0.5	10	15	30	9.7	100	10	—	4	2	*	*	*	*
VFRPSRBD1000R100N300	●	1	10	15	30	9.7	100	10	—	4	2	*	*	*	*
VFRPSRBD1000R200N300	●	2	10	15	30	9.7	100	10	—	4	2	*	*	*	*
VFRPSRBD1000R300N300	●	3	10	15	30	9.7	100	10	—	4	2	*	*	*	*
VFRPSRBD1200R050N360	●	0.5	12	18	36	11.7	110	12	—	4	2	*	*	*	*
VFRPSRBD1200R100N360	●	1	12	18	36	11.7	110	12	—	4	2	*	*	*	*
VFRPSRBD1200R200N360	●	2	12	18	36	11.7	110	12	—	4	2	*	*	*	*
VFRPSRBD1200R300N360	●	3	12	18	36	11.7	110	12	—	4	2	*	*	*	*

No interference

VFRPSRB

RECOMMENDED CUTTING CONDITIONS

Material	DC	RE	LU	n	f	ap	ae
H Hardned steel (45-55HRC)	0.5	0.05	2	25000	1000	0.005	0.1
	0.5	0.1	2	25000	1000	0.008	0.1
	0.6	0.05	2	21000	1000	0.005	0.1
	0.6	0.1	2	21000	1000	0.008	0.1
	0.6	0.1	4	18000	890	0.006	0.1
	0.6	0.2	2	24000	1100	0.01	0.1
	0.8	0.05	4	16000	760	0.015	0.12
	0.8	0.1	4	16000	760	0.02	0.12
	0.8	0.2	4	20000	950	0.03	0.12
	0.8	0.3	4	20000	950	0.03	0.12
	1	0.05	4	13000	1000	0.015	0.15
	1	0.1	4	13000	1000	0.02	0.15
	1	0.1	6	11000	890	0.015	0.12
	1	0.2	4	16000	1300	0.03	0.15
	1	0.2	6	13000	1000	0.02	0.12
	1	0.3	4	16000	1300	0.03	0.15
	1	0.4	4	16000	1300	0.04	0.15
	1.5	0.1	4	14000	1700	0.025	0.23
	1.5	0.1	6	11000	1400	0.025	0.18
	1.5	0.1	10	11000	1400	0.025	0.18
	1.5	0.2	4	14000	1700	0.05	0.23
	1.5	0.2	6	11000	1400	0.05	0.18
	1.5	0.2	10	11000	1400	0.05	0.18
	1.5	0.3	4	16000	1900	0.075	0.23
	1.5	0.3	6	13000	1500	0.075	0.18
	1.5	0.3	10	13000	1500	0.075	0.18
	1.5	0.5	4	16000	1900	0.08	0.23
	1.5	0.5	6	13000	1500	0.08	0.18
	1.5	0.5	10	13000	1500	0.08	0.18
	2	0.1	6	11000	1700	0.025	0.3
	2	0.1	10	8600	1400	0.025	0.24
	2	0.1	15	6400	1000	0.02	0.18
	2	0.2	6	11000	1700	0.055	0.3
	2	0.2	10	86000	1400	0.055	0.24
	2	0.2	15	6400	1000	0.04	0.18
	2	0.3	6	12000	1900	0.08	0.3
	2	0.3	10	9500	1500	0.08	0.24
	2	0.3	15	7200	1100	0.065	0.18
	2	0.3	20	7200	1100	0.065	0.18
	2	0.5	6	12000	1900	0.085	0.3
	2	0.5	10	9500	1500	0.085	0.24
	2	0.5	15	7200	1100	0.07	0.18
	2	0.5	20	7200	1100	0.07	0.18
	2.5	0.3	8	9500	1900	0.08	0.38
	2.5	0.3	15	7600	1500	0.08	0.3
	2.5	0.5	8	9500	1900	0.09	0.38

VFRPSRB

Material	DC	RE	LU	n	f	ap	ae
H Hardned steel (45-55HRC)	2.5	0.5	15	7600	1500	0.09	0.3
	2.5	1	8	9500	1900	0.15	0.33
	3	0.1	10	8100	1900	0.025	0.6
	3	0.1	15	6500	1600	0.025	0.48
	3	0.2	10	8100	1900	0.055	0.6
	3	0.2	15	6500	1600	0.055	0.48
	3	0.2	20	6500	1600	0.055	0.48
	3	0.3	10	9000	2200	0.085	0.6
	3	0.3	15	7200	1700	0.085	0.48
	3	0.3	20	7200	1700	0.085	0.48
	3	0.5	10	9000	2200	0.09	0.6
	3	0.5	15	7200	1700	0.09	0.48
	3	0.5	20	7200	1700	0.09	0.48
	3	1	10	9000	2200	0.15	0.54
	3	1	15	7200	1700	0.15	0.43
	3	1	20	7200	2000	0.15	0.43
	4	0.1	12	6100	1700	0.25	0.8
	4	0.1	20	4900	1400	0.25	0.6
	4	0.2	12	6100	1700	0.055	0.8
	4	0.2	20	4900	1400	0.055	0.6
	4	0.3	12	6800	1900	0.085	0.8
	4	0.3	20	5400	1500	0.085	0.6
	4	0.3	30	4100	1100	0.065	0.5
	4	0.5	12	6800	1900	0.09	0.8
	4	0.5	20	5400	1500	0.09	0.65
	4	0.5	30	4100	1100	0.075	0.5
	4	1	12	6800	1900	0.15	0.7
	4	1	20	5400	1500	0.15	0.55
	4	1	30	4100	1100	0.1	0.4
	5	0.5	15	6400	1800	0.1	1.3
	5	1	15	6400	1800	0.15	1.1
	6	0.1	18	4800	1500	0.03	1.5
	6	0.2	18	4800	1500	0.06	1.5
	6	0.3	18	5300	1700	0.09	1.5
	6	0.5	18	5300	1700	0.1	1.5
	6	1	18	5300	1700	0.15	1.4
	6	2	18	5300	1700	0.3	1.3
	8	0.2	24	3600	1100	0.06	2
	8	0.3	24	4000	1300	0.09	2
	8	0.5	24	4000	1300	0.095	2
	8	1	24	4000	1300	0.15	1.8
	8	2	24	4000	1300	0.3	1.7
	10	0.3	30	3200	1000	0.09	2.5
	10	0.5	30	3200	1000	0.095	2.5
	10	1	30	3200	1000	0.15	2.3
	10	2	30	3200	1000	0.3	2.1
	10	3	30	3200	1000	0.45	1.9
	12	0.5	36	2700	950	0.1	3
	12	1	36	2700	950	0.15	2.7
	12	2	36	2700	950	0.3	2.6
	12	3	36	2700	950	0.45	2.3

VFRPSRB

Material	DC	RE	LU	n	f	ap	ae
H Hardned steel (55-65HRC)	0.5	0.05	2	19000	760	0.004	0.08
	0.5	0.1	2	19000	760	0.006	0.08
	0.6	0.05	2	16000	760	0.004	0.08
	0.6	0.1	2	16000	760	0.006	0.08
	0.6	0.1	4	16000	760	0.005	0.08
	0.6	0.2	2	19000	890	0.008	0.08
	0.8	0.05	4	12000	570	0.01	0.1
	0.8	0.1	4	12000	570	0.015	0.1
	0.8	0.2	4	16000	760	0.025	0.1
	0.8	0.3	4	16000	760	0.025	0.1
	1	0.05	4	9500	760	0.01	0.12
	1	0.1	4	9500	760	0.015	0.12
	1	0.1	6	6400	510	0.01	0.1
	1	0.2	4	9500	760	0.025	0.12
	1	0.2	6	6400	510	0.02	0.1
	1	0.3	4	9500	760	0.025	0.12
	1	0.4	4	9500	760	0.03	0.12
	1.5	0.1	4	11000	920	0.015	0.2
	1.5	0.1	6	9200	730	0.015	0.16
	1.5	0.1	10	9200	730	0.015	0.16
	1.5	0.2	4	11000	920	0.035	0.2
	1.5	0.2	6	9200	730	0.035	0.16
	1.5	0.2	10	9200	730	0.035	0.16
	1.5	0.3	4	13000	1000	0.05	0.2
	1.5	0.3	6	10000	810	0.05	0.16
	1.5	0.3	10	10000	810	0.05	0.16
	1.5	0.5	4	13000	1000	0.055	0.2
	1.5	0.5	6	10000	810	0.055	0.16
	1.5	0.5	10	10000	810	0.055	0.16
	2	0.1	6	8600	1000	0.02	0.28
	2	0.1	10	6900	830	0.02	0.22
	2	0.1	15	5200	620	0.015	0.17
	2	0.2	6	8600	1000	0.035	0.28
	2	0.2	10	6900	830	0.035	0.22
	2	0.2	15	5200	620	0.025	0.17
	2	0.3	6	6900	1100	0.055	0.28
	2	0.3	10	7600	920	0.055	0.22
	2	0.3	15	5700	690	0.045	0.17
	2	0.3	20	5700	690	0.045	0.17
	2	0.5	6	9500	1100	0.06	0.28
	2	0.5	10	7600	920	0.06	0.22
	2	0.5	15	5700	690	0.045	0.17
	2	0.5	20	5700	690	0.045	0.17
	2.5	0.3	8	7600	1400	0.055	0.35
	2.5	0.3	15	6100	1100	0.055	0.28
	2.5	0.5	8	7600	1400	0.06	0.35

VFRPSRB


Material	DC	RE	LU	n	f	ap	ae
H Hardned steel (55-65HRC)	2.5	0.5	15	6100	1100	0.06	0.28
	2.5	1	8	7600	1400	0.09	0.31
	3	0.1	10	6500	1200	0.02	0.55
	3	0.1	15	5200	940	0.02	0.44
	3	0.2	10	6500	1200	0.04	0.55
	3	0.2	15	5200	940	0.04	0.44
	3	0.2	20	5200	940	0.04	0.44
	3	0.3	10	7200	1300	0.055	0.55
	3	0.3	15	5800	1000	0.055	0.44
	3	0.3	20	5800	1000	0.055	0.44
	3	0.5	10	7200	1300	0.06	0.55
	3	0.5	15	5800	1000	0.06	0.44
	3	0.5	20	5800	1000	0.06	0.44
	3	1	10	7200	1300	0.1	0.5
	3	1	15	5800	1000	0.1	0.4
	3	1	20	5800	1000	0.1	0.4
	4	0.1	12	4900	970	0.02	0.74
	4	0.1	20	3900	780	0.02	0.6
	4	0.2	12	4900	970	0.04	0.74
	4	0.2	20	3900	780	0.04	0.6
	4	0.3	12	5400	1100	0.055	0.75
	4	0.3	20	4300	870	0.055	0.6
	4	0.3	30	3200	650	0.045	0.45
	4	0.5	12	5400	1100	0.06	0.75
	4	0.5	20	4300	870	0.06	0.6
	4	0.5	30	4300	650	0.05	0.45
	4	1	12	5400	1100	0.1	0.66
	4	1	20	4300	870	0.1	0.53
	4	1	30	3200	650	0.075	0.4
	5	0.5	15	5100	1000	0.065	1.2
	5	1	15	5100	1000	0.1	1
	6	0.1	18	3800	920	0.02	1.4
	6	0.2	18	3800	920	0.04	1.4
	6	0.3	18	4200	1000	0.06	1.4
	6	0.5	18	4200	1000	0.065	1.4
	6	1	18	4200	1000	0.1	1.2
	6	2	18	4200	1000	0.2	1.1
	8	0.2	24	2900	690	0.04	1.8
	8	0.3	24	3200	760	0.06	1.8
	8	0.5	24	3200	760	0.065	1.8
	8	1	24	3200	760	0.1	1.7
	8	2	24	3200	760	0.2	1.6
	10	0.3	30	2500	610	0.06	2.3
	10	0.5	30	2500	610	0.065	2.3
	10	1	30	2500	610	0.1	2.1
	10	2	30	2500	610	0.2	2
	10	3	30	2500	610	0.3	1.7
	12	0.5	36	2100	510	0.065	2.8
	12	1	36	2100	510	0.1	2.5
	12	2	36	2100	510	0.2	2.4
	12	3	36	2100	510	0.3	2.1

VFRPSRB

Material	DC	RE	LU	n	f	ap	ae
H Hardned steel (65-70HRC)	0.5	0.05	2	13000	510	0.003	0.08
	0.5	0.1	2	13000	510	0.005	0.08
	0.6	0.05	2	11000	510	0.003	0.08
	0.6	0.1	2	11000	510	0.005	0.08
	0.6	0.1	4	11000	510	0.004	0.08
	0.6	0.2	2	16000	760	0.006	0.08
	0.8	0.05	4	7900	380	0.01	0.1
	0.8	0.1	4	7900	380	0.01	0.1
	0.8	0.2	4	12000	570	0.02	0.1
	0.8	0.3	4	12000	570	0.02	0.1
	1	0.05	4	6400	510	0.01	0.12
	1	0.1	4	6400	510	0.015	0.12
	1	0.1	6	6400	510	0.01	0.1
	1	0.2	4	6400	510	0.02	0.12
	1	0.2	6	6400	510	0.015	0.1
	1	0.3	4	6400	510	0.02	0.12
	1	0.4	4	6400	510	0.025	0.12
	1.5	0.1	4	7200	570	0.01	0.2
	1.5	0.1	6	5700	460	0.01	0.16
	1.5	0.1	10	5700	460	0.01	0.16
	1.5	0.2	4	7200	570	0.025	0.2
	1.5	0.2	6	5700	460	0.025	0.16
	1.5	0.2	10	5700	460	0.025	0.16
	1.5	0.3	4	8000	640	0.035	0.2
	1.5	0.3	6	6400	510	0.035	0.16
	1.5	0.3	10	6400	510	0.035	0.16
	1.5	0.5	4	8000	640	0.04	0.2
	1.5	0.5	6	6400	510	0.04	0.16
	1.5	0.5	10	6400	510	0.04	0.16
	2	0.1	6	5400	640	0.015	0.28
	2	0.1	10	4300	520	0.015	0.22
	2	0.1	15	3200	390	0.01	0.17
	2	0.2	6	5400	640	0.025	0.28
	2	0.2	10	4300	520	0.025	0.22
	2	0.2	15	3200	390	0.02	0.16
	2	0.3	6	6000	420	0.04	0.27
	2	0.3	10	4800	570	0.04	0.22
	2	0.3	15	3600	430	0.03	0.16
	2	0.3	20	3600	430	0.03	0.16
	2	0.5	6	6000	720	0.04	0.27
	2	0.5	10	4800	570	0.04	0.22
	2	0.5	15	3600	430	0.035	0.16
	2	0.5	20	3600	430	0.035	0.16
	2.5	0.3	8	4800	860	0.04	0.34
	2.5	0.3	15	3800	690	0.04	0.27
	2.5	0.5	8	4800	860	0.04	0.34
	2.5	0.5	15	3800	690	0.04	0.27
	2.5	1	8	4800	860	0.065	0.31
	3	0.1	10	4100	730	0.015	0.55
	3	0.1	15	3200	580	0.015	0.44
	3	0.2	10	4100	730	0.025	0.55

VFRPSRB

Material	DC	RE	LU	n	f	ap	ae
H Hardned steel (65-70HRC)	3	0.2	15	3200	580	0.025	0.44
	3	0.2	20	3200	580	0.025	0.44
	3	0.3	10	4500	810	0.04	0.55
	3	0.3	15	3600	650	0.04	0.44
	3	0.3	20	3600	650	4	0.44
	3	0.5	10	4500	810	0.045	0.55
	3	0.5	15	3600	650	0.045	0.44
	3	0.5	20	3600	650	0.045	0.44
	3	1	10	4500	810	0.07	0.5
	3	1	15	3600	650	0.07	0.4
	3	1	20	3600	650	0.07	0.4
	4	0.1	12	3000	610	0.015	0.73
	4	0.1	20	2400	490	0.015	0.58
	4	0.2	12	3000	610	0.025	0.73
	4	0.2	20	2400	490	0.025	0.58
	4	0.3	12	3400	680	0.04	0.73
	4	0.3	20	2700	540	0.04	0.58
	4	0.3	30	2000	410	0.035	0.44
	4	0.5	12	3400	680	0.045	0.74
	4	0.5	20	2700	540	0.045	0.58
	4	0.5	30	2000	410	0.035	0.44
	4	1	12	3400	680	0.07	0.66
	4	1	20	2700	540	0.07	0.53
	4	1	30	2000	410	0.055	0.4
	5	0.5	15	3200	640	0.045	1.1
	5	1	15	3200	640	0.075	1
	6	0.1	18	2400	570	0.015	1.3
	6	0.2	18	2400	570	0.03	1.3
	6	0.3	18	2700	640	0.045	1.3
	6	0.5	18	2700	640	0.045	1.3
	6	1	18	2700	640	0.075	1.2
	6	2	18	2700	640	0.15	1.1
	8	0.2	24	1800	430	0.03	1.8
	8	0.3	24	2000	480	0.045	1.8
	8	0.5	24	2000	480	0.045	1.8
	8	1	24	2000	480	0.075	1.6
	8	2	24	2000	480	0.15	1.5
	10	0.3	30	1600	380	0.045	2.3
	10	0.5	30	1600	380	0.045	2.3
	10	1	30	1600	380	0.075	2
	10	2	30	1600	380	0.15	1.9
	10	3	30	1600	380	0.2	1.7
	12	0.5	36	1300	320	0.05	2.7
	12	1	36	1300	320	0.075	2.4
	12	2	36	1300	320	0.15	2.3
	12	3	36	1300	320	0.2	2



When the inclination angle of machined surface is large, or machining with large cutting load such as corner area, reduce the revolution and feed rate.

If the depth of cut is shallow, the revolution and feed rate can be increased.

Cutting conditions may differ considerably due to the tool overhang, depth of cut and machine tool condition.


Please use the table above as a reference starting point.

APPLICATION EXAMPLES

Material	1.2344 (52 HRC)
Tool	VFR2SBFR0300
n (min ⁻¹)	32.000
V_c (m/min)	603
V_f (mm/min)	1.280
f_z (mm/t.)	0.02
a_p (mm)	0.02
a_e (mm)	0.02
Overhang (mm)	15
Cutting mode	Air blow
Machine	Vertical MC (HSK-E25)


COMPARISON OF FINISHED SURFACES

VFR2SBF

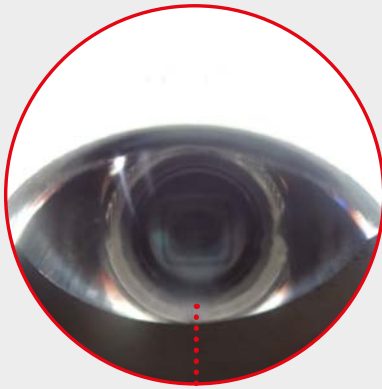

Good surface

Conventional end mills



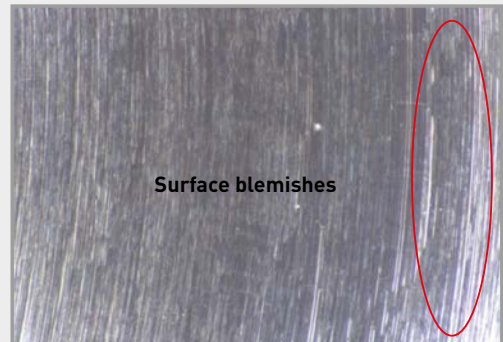


Surface blemishes

Poor surface

APPLICATION EXAMPLES

Material	1.3343 [64 HRC]
Tool	VFR2SBR0300
n (min ⁻¹)	5.400
V_f (mm/min)	540
f_z (mm/t.)	0.05
a_p (mm)	2.0
a_e (mm)	2.0
Overhang (mm)	22
Cutting mode	Air blow
Machine	Vertical MC (HSK-A63)

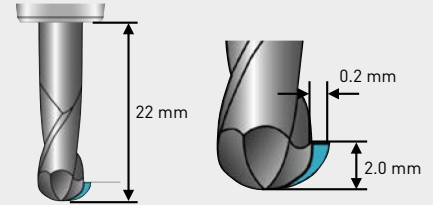
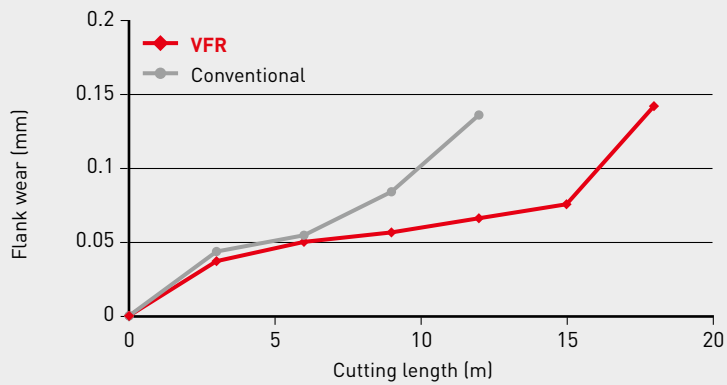


VFR



Conventional

Material	1.2344 [52 HRC]
Tool	VFR2SBR0300
n (min ⁻¹)	17.000
V_f (mm/min)	1.700
f_z (mm/t.)	0.05
a_p (mm)	2.0
a_e (mm)	0.3
Overhang (mm)	22
Cutting mode	Air blow
Machine	Vertical MC (HSK-A63)

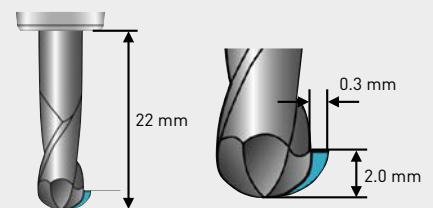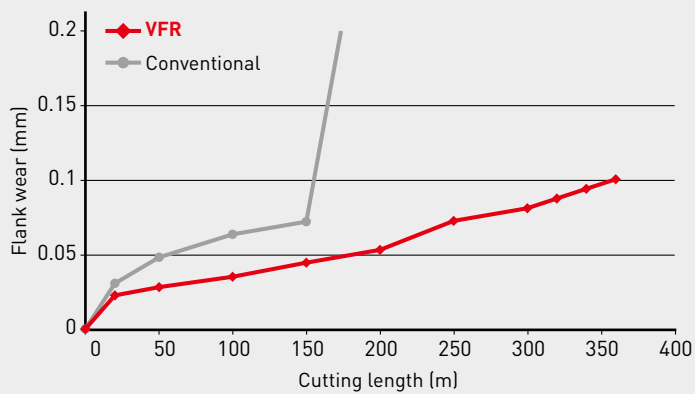

VFR



Conventional

MEMO

EUROPEAN SALES COMPANIES

GERMANY

MITSUBISHI MATERIALS TOOLS EUROPE GMBH
Comeniusstr. 2 . 40670 Meerbusch
Phone +49 2159 91890 . Fax +49 2159 918966
Email admin@mmchg.de

UK Office

MMC HARDMETAL UK LTD
1 Centurion Court, Centurion Way
Tamworth, B77 5PN
Phone +44 1827 312312
Email sales@mitsubishicarbide.co.uk

UK Deliveries / Returns

Unit 4 B5K Business Park, Quartz Close
Tamworth, B77 4GR

SPAIN

MITSUBISHI MATERIALS ESPAÑA, S.A.
Calle Emperador 2 . 46136 Museros/Valencia
Phone +34 96 1441711
Email comercial@mmevalencia.es

FRANCE

MMC METAL FRANCE S.A.R.L.
6, Rue Jacques Monod . 91400 Orsay
Phone +33 1 69 35 53 53 . Fax +33 1 69 35 53 50
Email mmfsales@mmc-metal-france.fr

POLAND

MMC HARDMETAL POLAND SP. Z O.O
Al. Armii Krajowej 61 . 50-541 Wrocław
Phone +48 71335 1620 . Fax +48 71335 1621
Email sales@mitsubishicarbide.com.pl

ITALY

MMC ITALIA S.R.L.
Viale Certosa 144 . 20156 Milano
Phone +39 0293 77031 . Fax +39 0293 589093
Email info@mmc-italia.it

TURKEY

MITSUBISHI MATERIALS TOOLS EUROPE GMBH ALMANYA İZMİR MERKEZ ŞUBESİ
Adalet Mahallesi Anadolu Caddesi No: 41-1 . 15001 35530 Bayraklı / İzmir
Phone +90 232 5015000 . Fax +90 232 5015007
Email info@mmchg.com.tr

www.mmc-carbide.com

DISTRIBUTED BY:

┌

┐

└

┘

B231E 

Published by:  MITSUBISHI MATERIALS TOOLS EUROPE | 2023.10