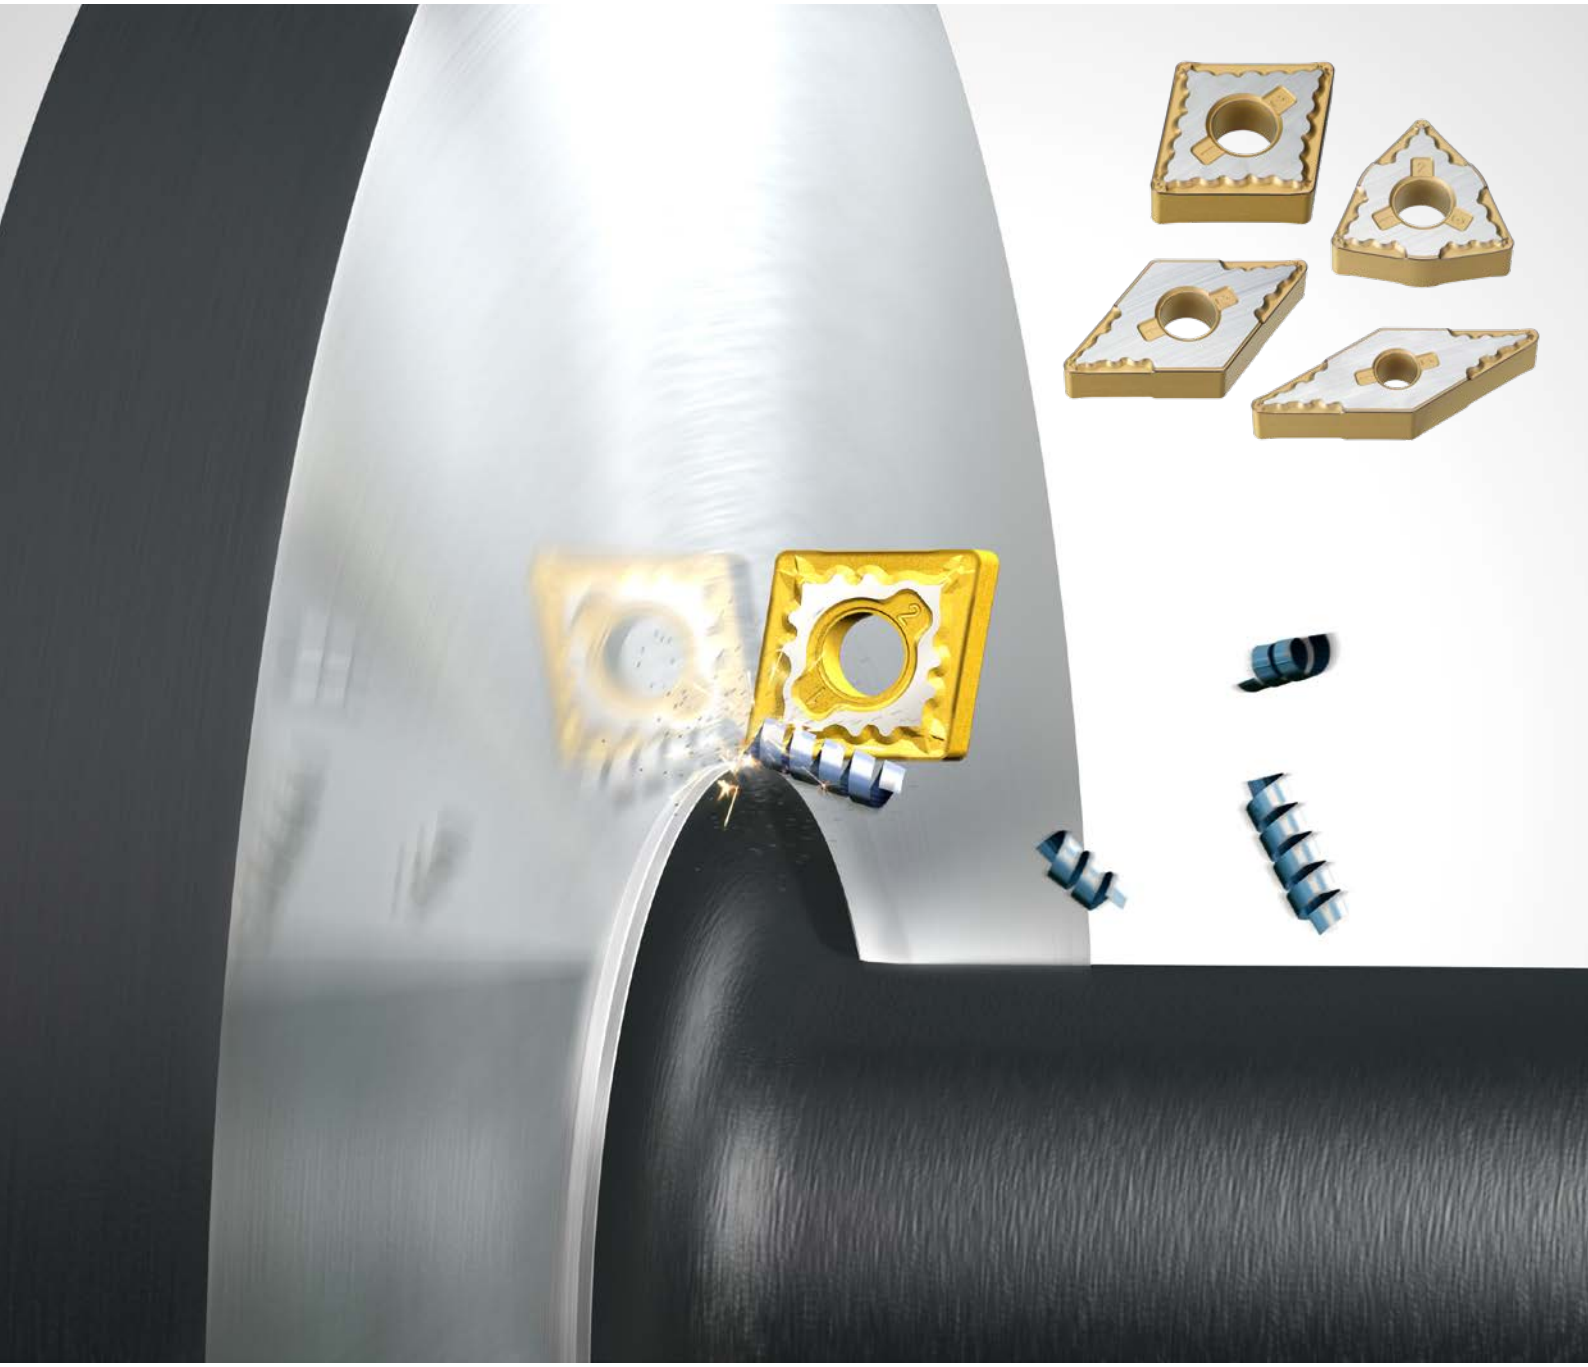
2026.04

B266E

MC6100 SERIES

BRINGING THE ULTIMATE HIGH SPEED CUTTING PERFORMANCE



MITSUBISHI MATERIALS

MC6100 SERIES

CVD COATED GRADE FOR STEEL TURNING

Dramatic increase in stability and wear resistance is enabled by utilising the improved coating adhesion and crystal orientation technology.

MC6115

For high speed turning




MC6125

First recommendation for a wide range of applications




MC6135

For excellent fracture resistance




"SUPER" NANO TEXTURE TECHNOLOGY

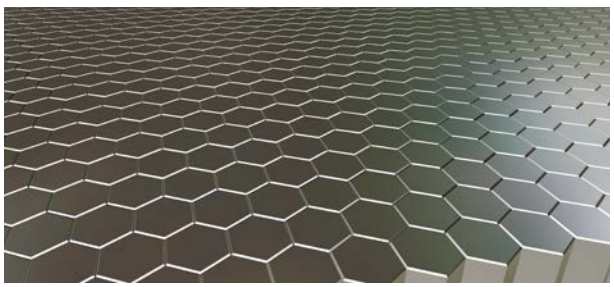The standard Nano Texture Technology has been improved and developed to be an industry leading standard for crystal growth of Al_2O_3 coatings. This Super Nano Texture Technology increases tool life and wear resistance due to the process that creates fine, dense crystal growth.



CRYSTAL ORIENTATION
(Image)

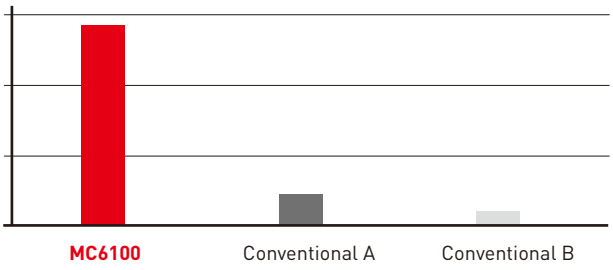


The ratio of Al_2O_3 crystal grains with the same orientation




Conventional CVD inserts

Grain size and growth direction are uneven.



Nano Texture

Uniformity of the grain size and growth direction has improved.



„Super" Nano Texture

Uniformity of the growth direction has drastically improved.

MC6100 SERIES


PROTECTION AGAINST SUDDEN FRACTURING

STRENGTHENED CHIPPING RESISTANCE

Cracks that occur during unstable machining are prevented due to the relaxing of the tensile stress in the coating. MC6100 series has an 80 % reduction in coating tensile stress compared to conventional CVD inserts.

RELAXING THE TENSILE STRESS


Impact stress during machining



Reduced tensile stress

MC6100 Series

MC6100 series has a much lower level of stress than conventional CVD coatings due to the surface treatment. This divides the force of impacts during machining and protects from sudden fracturing.




Large tensile stress

Conventional CVD inserts

Cracks are generated in the surface of coatings during machining. They propagate through the coating into the substrate due to the large tensile stress in the coating structure. This creates one of the main causes of sudden insert breakage.


SUPER-TOUGH-GRIP

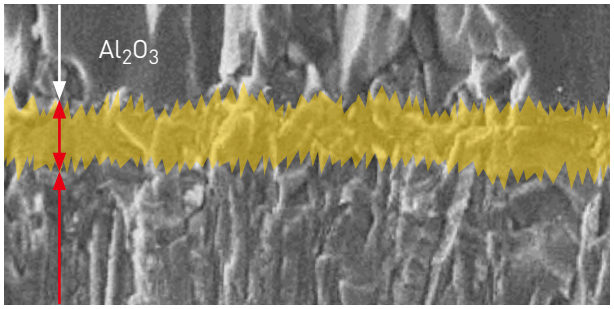The Super Tough-Grip layer has finer crystal grains that enhance the strength of the adhesion between the coating layers.



(Image)

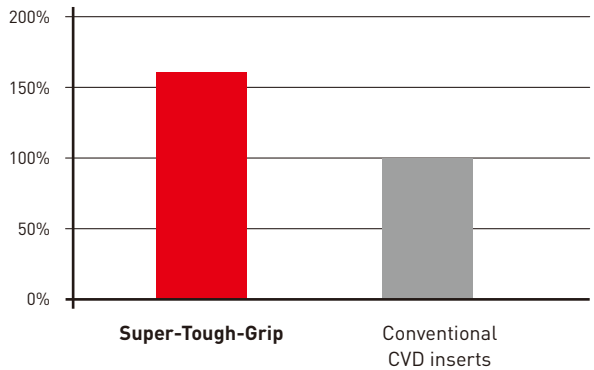
Adhesion strength evaluation*



*Adhesion strength measurement is obtained from a scratch test that records the force needed to peel the coating layers.

MC6115

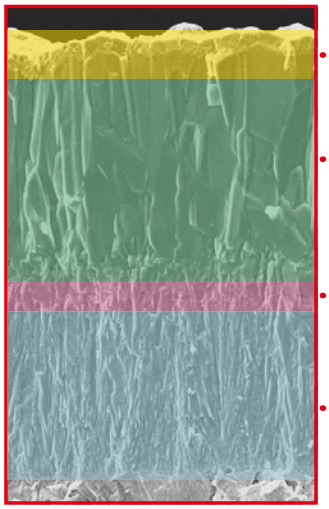MC6115 IMPROVES HIGH SPEED MACHINING AND PROCESS EFFICIENCY WITH A DRAMATIC INCREASE IN RESISTANCE TO WEAR AND HEAT



Outer Layer

Better identification of corner use.

Super Nano Texture Al_2O_3 Layer

Outstanding wear resistance especially at high temperatures.

Super Tough-Grip

Strong adhesion between the tough coating layers.

Fine Granular TiCN Layer

Coating for high wear resistance.

IMPROVED OUTER COATING (LAYER)

The outer layer of MC6115 restricts chip welding thereby improving the dimensional accuracy and surface roughness of components. This also enables easy recognition of whether the insert corner can continue machining.

EXAMPLE WHEN MACHINING DIN 20MnCr5


MACHINING DIN 20MNCR5: COMPARISON OF WEAR RESISTANCE

Material	DIN 20MnCr5 170HB
Insert	CNMG120408-MH
Vc (m/min)	200
f (mm/rev)	0.3
ap (mm)	1.5
Cutting mode	Dry cutting
Results	When comparing the high edge strength MH breaker with a conventional low resistance chipbreaker, it shows that MC6115 accomplishes both high welding and wear resistance.

AFTER 2 MINUTES OF MACHINING CHROME STEEL



MC6115
MH Breaker



Conventional CVD insert

MC6125

FIRST RECOMMENDED GRADE FOR STEEL TURNING INCREASING TOOL LIFE WITH STABLE PERFORMANCE OVER A WIDER RANGE OF APPLICATIONS



Outer Layer

Better identification of corner use.

Multiple Layers of Ti compounds and an Al_2O_3 Layer

Achieves excellent wear resistance.

Super Nano Texture Al_2O_3 Layer

Outstanding wear resistance especially at high temperatures.

Super Tough-Grip

Strong adhesion between the tough coating layers.

Fine Granular TiCN Layer

Coating for high wear resistance.


SPECIAL SMOOTH SURFACE TREATMENT

MC6125 uses a new surface treatment at the cutting edge for increased stability. Additionally, the single layers are made with a special smoothening preparation that provides greater adhesion to enable a wider range of applications.

EXAMPLE WHEN MACHINING C45

MACHINING C45: COMPARISON OF WEAR RESISTANCE


Material	C45
Insert	CNMG120408-MH
Vc (m/min)	200
f (mm/rev)	0.3
ap (mm)	1.5
Cutting mode	Wet cutting
Results	The surface treatment has improved stability and provided longer tool life.

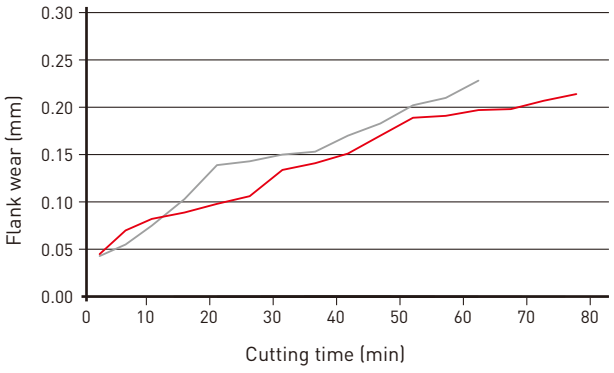

■ : **MC6125** ■ : Conventional CVD Insert

MC6135

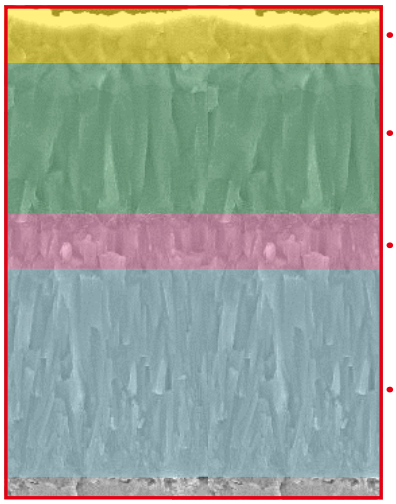OPTIMAL VERSATILITY FOR MACHINING CONTINUOUS THROUGH TO INTERMITTENT APPLICATIONS



Outer Layer

Better identification of corner use.

Super Nano Texture Al_2O_3 Layer

Outstanding wear resistance especially at high temperatures.

Super Tough-Grip

Strong adhesion between the tough coating layers.

Fine Granular TiCN Layer

Coating for high wear resistance.


THINNER COATINGS OPTIMISED FOR GENERAL PURPOSE MACHINING

Industry-leading crystal orientation control technology enables thinner but still impact-resistant coatings provide improved chipping and wear resistance which is optimal for general-purpose use. (50 % thinner compared to Mitsubishi's conventional coating).

MACHINING DIN 41CrMo4: COMPARISON OF TOUGHNESS DURING INTERRUPTED CUTTING

MC6135 shows high stability even during interrupted cutting and can be used over a wide area of applications.

Material	DIN 41CrMo4
Insert	CNMG120408-○○
Vc (m/min)	200
f (mm/rev)	0.35
ap (mm)	2.5
Cutting mode	Wet cutting
Results	Pre-set tool life limit or until damage deteriorates the performance.

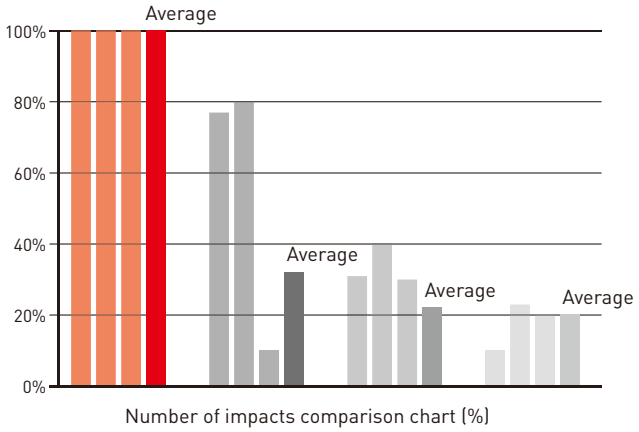



Number of impacts comparison chart (%)

■ : **MC6135** ■ A ■ B ■ C : Conventional tool

MC6100 SERIES

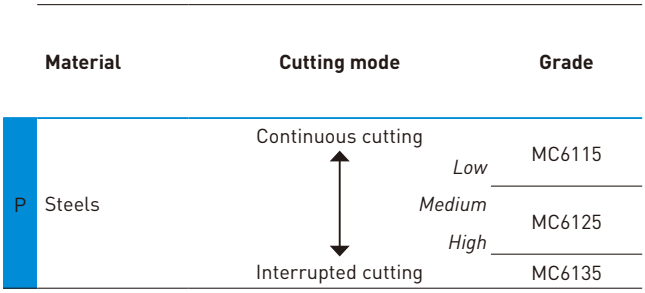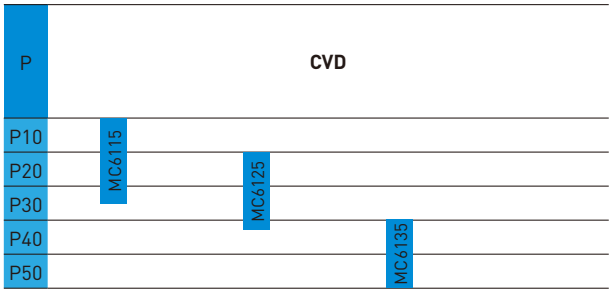
SELECTION CRITERIA AND APPLICATION RANGE





APPLICATION RANGE

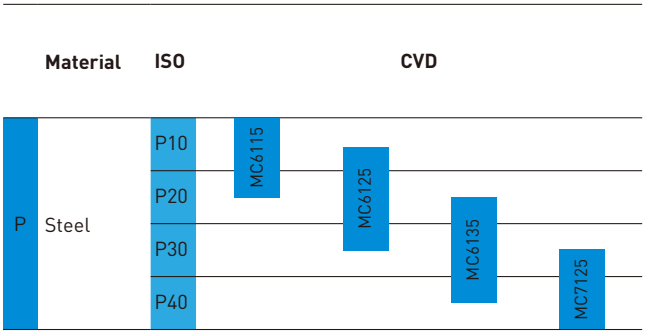MC7125 is the first-choice grade for stainless steel turning. When combined with chipbreakers designed for steel machining, it can also be used as a Multi-assist grade for steel turning, delivering reliable chip control and stable tool life.
For available inserts and recommended cutting conditions, please scan the QR code to visit our website.





Interested in more...

B277

www.mmte-mediastore.net



NEW

FPH CHIPBREAKER

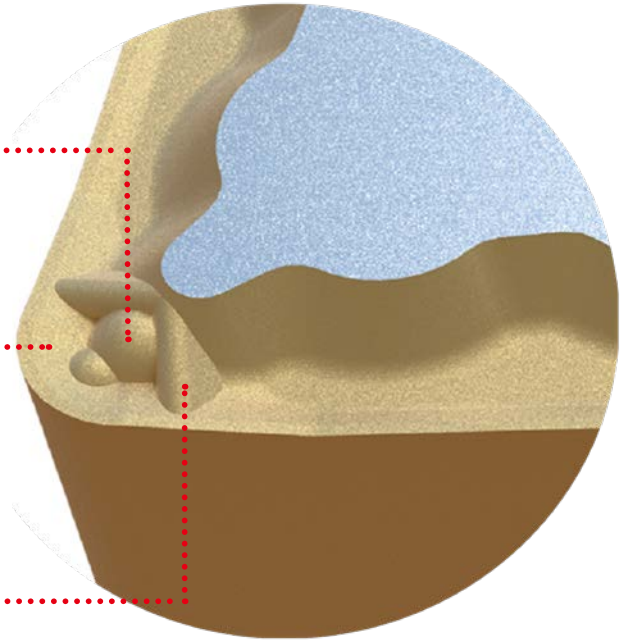
FOR LOW DEPTHS OF CUT AND HIGH FEED FINISHING

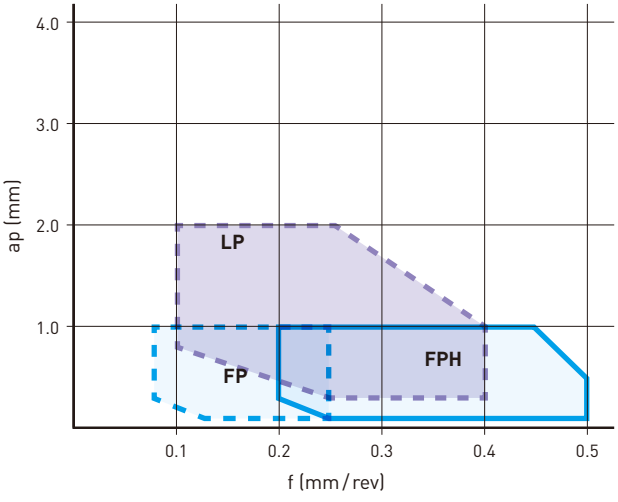
The combination of a positive land cutting edge shape and a two-stage protrusion optimises chip generation at low depths of cut, high feed conditions, thereby reducing machining times.

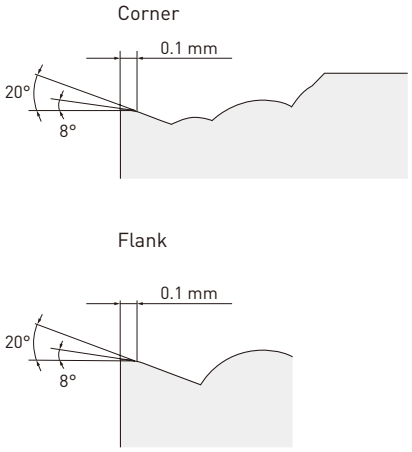
Main Convex
Provides consistent chip curling effect even for the thicker chips produced at high feed rates.

Positive Land
Optimum balance of sharpness and fracture resistance.

Sub Convex
Enables good chip breaking when copy turning with varying depths of cut.







HOW TO USE

1. When using the FPH chipbreaker, maintain the depth of cut at 1 mm or less and the feed rate per revolution to 0.2 mm/rev or more.
2. If the depth of cut is 1 mm or more, it is recommended to use an LP chipbreaker.
3. If the feed rate per revolution is less than 0.2 mm/rev, the FP chipbreaker is recommended.

NEW

FPH CHIPBREAKER

CUTTING PERFORMANCE


DIN 1.7225 (42CrMo4): COMPARISON OF CHIPS AND FINISHED SURFACE

The FPH chipbreaker has excellent chip breaking properties, therefore a good component surface finish can always be expected.

Material	
Insert	CNMG120408-○○ MC6125
Vc (m/min)	200
f (mm/rev)	The fluctuation values are shown in the image
ap (mm)	0.2
Cutting mode	Wet cutting




MC6125 + FPH




Conventional

CHIP COMPARISON

Material	DIN 1.7225 (42CrMo4)
Insert	DNMG150408-○○
Vc (m/min)	200
f (mm/rev)	0.3
ap (mm)	0.2
Cutting mode	Dry cutting











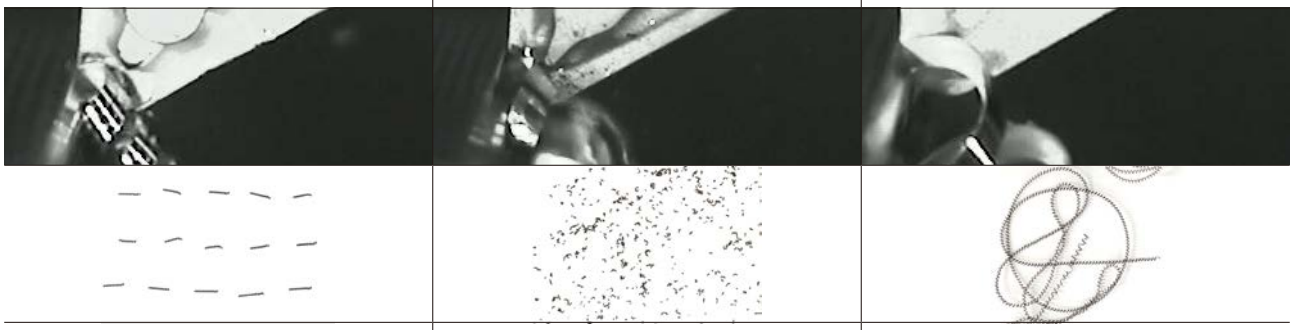FPH	Conventional finish cutting chipbreaker	Conventional light cutting chipbreaker
		
Broken into pieces of ideal length.	Excessive division. This is a condition where the finished surface is prone to scratches.	Long chips are being generated. There is a high risk of it wrapping around the workpiece and interrupting the machining process.

MC6100 SERIES

CHIPBREAKER SYSTEM FOR STEEL TURNING












NEGATIVE INSERTS

Tolerance		Features		Cross section geometry
FINISH CUTTING				
M	 FP	**FIRST RECOMMENDATION FOR FINISHING CARBON STEEL AND ALLOY STEEL** Controls chip clogging during high-feed cutting and prevents chips of soft workpiece materials from running onto their surfaces. Large rake angle suppress chatter vibration and deformation in machining of low rigidity workpiece material.		
	 FH	**FIRST RECOMMENDATION FOR FINISHING CARBON STEEL AND ALLOY STEEL** Stable chip control even at small depths of cut.		
	 FS	**ALTERNATIVE CHIPBREAKER FOR FINISHING MILD STEEL** Stable chip control even at small depths of cut. Sharp edge gives best performance.		
	 FY	**FIRST RECOMMENDATION FOR FINISHING MILD STEEL** Effectively controls adhesive chips. Suitable for mild steel finishing.		

1/4



















MC6100 SERIES – CHIPBREAKER SYSTEM FOR STEEL TURNING

NEGATIVE INSERTS

Tolerance		Features		Cross section geometry
LIGHT CUTTING				
M	 LP	**FIRST RECOMMENDATION FOR LIGHT CUTTING OF CARBON STEEL AND ALLOY STEEL** Stable chip control in the light cutting range. The curved edge allows smooth chip discharge.		
	 SH	**ALTERNATIVE CHIPBREAKER FOR LIGHT CUTTING OF CARBON STEEL AND ALLOY STEEL** Can be used at low depth of cuts and high feed rates. The curved edge allows smooth chip discharge. Recommended for workpieces in the 160 – 250HB range.		
	 SA	**ALTERNATIVE CHIPBREAKER FOR LIGHT CUTTING OF CARBON STEEL AND ALLOY STEEL** Superior chip control at small depths of cuts. Covers copying and back turning with a wavy edge. Recommended for workpieces in the 200 – 300HB range.		
	 SW	**WIPER INSERT FOR LIGHT CUTTING OF CARBON AND ALLOY AND STEELS, STAINLESS STEEL AND CAST IRON** In comparison to conventional chipbreakers, the surface finish is maintained even if the feed per revolution is doubled. Wiper design for increased productivity and improved surface finishes.		
	 SY	**FIRST RECOMMENDATION FOR LIGHT CUTTING OF MILD STEEL** Effectively controls adhesive chips. Suitable for mild steel light cutting.		













MC6100 SERIES – CHIPBREAKER SYSTEM FOR STEEL TURNING

NEGATIVE INSERTS

Tolerance		Features		Cross section geometry
MEDIUM CUTTING				
M	 MP	**FIRST RECOMMENDATION FOR MEDIUM CUTTING OF CARBON STEEL AND ALLOY STEEL** Suitable for medium to light cutting. Breaker geometry appropriate for copying and back turning. Cutting edge geometry for an optimum balance of sharpness and fracture resistance.		
	 MS	**ALTERNATIVE CHIPBREAKER FOR MEDIUM CUTTING** The sharp edge gives best performance. Flat top chipbreaker shape offers high edge strength. Applicable to grades other than MP9005, MP9015, MP9025, MT9015.		
	 MA	**FIRST RECOMMENDATION FOR MEDIUM CUTTING OF CARBON STEEL AND ALLOY STEEL** Ideal for general cutting applications. Positive land provides sharp cutting action.		
	 MH	**ALTERNATIVE CHIPBREAKER FOR MEDIUM CUTTING OF CARBON STEEL AND ALLOY STEEL** Flat land offers high edge strength. Good chip control with a suitable chip pocket.		
	 Standard	**ALTERNATIVE CHIPBREAKER FOR MEDIUM CUTTING OF CARBON STEEL AND ALLOY STEEL** Flat land offers high edge strength. Flat top breaker shape offers high edge strength.		
	 MW	**WIPER INSERT FOR MEDIUM CUTTING CARBON STEEL, ALLOY STEEL, STAINLESS STEEL AND CAST IRON** The wiper allows up to two times higher feed. A wide chip pocket prevents chip jamming.		
	 R/L-ES	**ALTERNATIVE CHIPBREAKER FOR MEDIUM CUTTING OF STAINLESS STEEL** Good balance of edge strength and sharpness. Right- or left-hand chipbreaker for unidirectional chip control.		
ROUGH CUTTING				
M	 RP	**FIRST RECOMMENDATION FOR ROUGH CUTTING OF CARBON STEEL AND ALLOY STEEL** For interrupted cutting and removing scale. Good balance of cutting edge strength and low cutting resistance because of a suitable rake angle.		
	 GH	**ALTERNATIVE CHIPBREAKER FOR ROUGH CUTTING OF CARBON STEEL, ALLOY STEEL AND CAST IRON** For interrupted cutting and removing scale. A combination of a wide land and a large chip pocket allows high feed rates.		

MC6100 SERIES – CHIPBREAKER SYSTEM FOR STEEL TURNING


















NEGATIVE INSERTS

Tolerance		Features		Cross section geometry
HEAVY CUTTING				
M	 HX	**FIRST RECOMMENDATION FOR HEAVY CUTTING OF CARBON STEEL AND ALLOY STEEL** Covers the medium range of the heavy cutting region. Owing to the straight edge and chamfer, it gives a balance of sharpness and strength. Variable land and a wavy chipbreaker for good chip control.		
	 HL	**FIRST RECOMMENDATION FOR HEAVY CUTTING ALTERNATIVE CHIPBREAKER FOR HEAVY CUTTING OF CARBON STEEL AND ALLOY STEEL** Low resistance due to narrow flat land. Achieves high chip breaking ability.		
	 HR	**ALTERNATIVE CHIPBREAKER FOR HEAVY CUTTING OF CARBON STEEL AND ALLOY STEEL** High cutting edge strength. Excellent chip discharge even with high feed and high depth of cut.		
	 HV	**ALTERNATIVE CHIPBREAKER FOR HEAVY CUTTING OF CARBON STEEL AND ALLOY STEEL** Covers the upper end of the heavy cutting region. Wide land and large chamfer offer high edge strength. A wide chipbreaker prevents chip jamming.		
	 HZ	**ALTERNATIVE CHIPBREAKER FOR HEAVY CUTTING OF CARBON AND ALLOY STEEL** Covers the lower end of the heavy cutting area. Low cutting resistance due to positive land and curved edge. Teardrop dots improve chip control without increasing cutting resistance.		
	 HM	**ALTERNATIVE CHIPBREAKER FOR HEAVY CUTTING OF CARBON, ALLOY AND STAINLESS STEELS** Flat land provides outstanding balance between cutting edge strength and sharpness.		

4/4





MC6100 SERIES – CHIPBREAKER SYSTEM FOR STEEL TURNING

5°, 7° POSITIVE INSERTS

Tolerance		Features		Cross section geometry
FINISH CUTTING				
M	 FP	**FIRST RECOMMENDATION FOR FINISHING CARBON STEEL, ALLOY STEEL AND MILD STEEL** Chipbreaker protrusion at the corner tip controls chips even at small depth of cut. Maintains the edge strength at the corner and prevents sudden fractures.		
	 FV	**ALTERNATIVE CHIPBREAKER FOR FINISHING CARBON STEEL, ALLOY STEEL, MILD STEEL AND STAINLESS STEEL** Suitable for low depths of cut and low feed rates. Sharp cutting edge and low resistance design achieves excellent cutting performance.		
LIGHT CUTTING				
M	 LP	**FIRST RECOMMENDATION FOR LIGHT CUTTING OF CARBON STEEL, ALLOY STEEL AND MILD STEEL** Sharp cutting edge due to a large rake angle. Prevents welding of the insert and controls white turbidity of the surface finish. Chipbreaker protrusion suitable for depth of cut area achieves a wide range of chip control.		
	 SW	**WIPER INSERT FOR LIGHT CUTTING OF CARBON STEEL, ALLOY STEEL, MILD STEEL AND STAINLESS STEEL** In comparison to conventional chipbreakers, the surface finish is maintained even if the feed per revolution is doubled. Positive land improves sharpness.		
MEDIUM CUTTING				
M	 MP	**FIRST RECOMMENDATION FOR MEDIUM CUTTING OF CARBON STEEL, ALLOY STEEL AND MILD STEEL** Good balance of wear resistance and fracture resistance because of the flat land cutting edge. A wide chip pocket controls increasing of the cutting resistance and reduces vibration and chip jamming even at large depths of cut.		
	 MV	**ALTERNATIVE CHIPBREAKER FOR MEDIUM CUTTING OF CARBON STEEL, ALLOY STEEL, MILD STEEL AND STAINLESS STEEL** A positive insert and the large rake angle achieve sharp cutting edge performance. The double breakers and round shape in the rake face achieve a wide range of chip discharge.		
	 MW	**WIPER INSERT FOR MEDIUM CUTTING OF CARBON STEEL, ALLOY STEEL, MILD STEEL AND STAINLESS STEEL** The wiper allows up to two times higher feed. A wide chip pocket prevents chip jamming.		
	 Standard	**ALTERNATIVE CHIPBREAKER FOR MEDIUM CUTTING OF CARBON STEEL, ALLOY STEEL, MILD STEEL, STAINLESS STEEL AND CAST IRON** Balance of edge strength and sharpness due to a combination of a flat land and large rake angle.		







MC6100 SERIES – CHIPBREAKER SYSTEM FOR STEEL TURNING

7° POSITIVE INSERTS

Tolerance		Features		Cross section geometry
HEAVY CUTTING				
M	 RR	**CHIPBREAKER FOR HEAVY CUTTING OF CARBON STEEL AND ALLOY STEEL** A wide groove chipbreaker prevents chips from jamming at large depths of cut. Small dimples improve chip control at small depths of cut.		
FINISH CUTTING				
M	 SVX	**ALTERNATIVE CHIPBREAKER FOR LIGHT CUTTING OF CARBON STEEL AND ALLOY STEEL** Chip control is improved by having a chipbreaker geometry suitable for copying.		

1/1








11° POSITIVE INSERTS

Tolerance		Features		Cross section geometry
FINISH CUTTING				
M	 FV	**FIRST RECOMMENDATION FOR FINISHING CARBON STEEL, ALLOY STEEL, MILD STEEL AND STAINLESS STEEL** Suitable for low depths of cut and low feed rates. Sharp cutting edge and low resistance design achieves excellent cutting performance.		
LIGHT CUTTING				
M	 LP	**FIRST RECOMMENDATION FOR LIGHT CUTTING OF CARBON STEEL, ALLOY STEEL AND MILD STEEL** Sharp cutting edge due to a large rake angle. Prevents welding of the insert and controls white turbidity of the surface finish. Chipbreaker protrusion suitable for depth of cut area achieves a wide range of chip control.		
	 SW	**WIPER INSERT FOR LIGHT CUTTING OF CARBON STEEL, ALLOY STEEL, MILD STEEL AND STAINLESS STEEL** In comparison to conventional chipbreakers, the surface finish is maintained even if the feed per revolution is doubled. Positive land improves sharpness.		

1/1

MC6100 SERIES – CHIPBREAKER SYSTEM FOR STEEL TURNING

11° POSITIVE INSERTS

Tolerance		Features		Cross section geometry
MEDIUM CUTTING				
M	 MP	**FIRST RECOMMENDATION FOR MEDIUM CUTTING OF CARBON STEEL, ALLOY STEEL AND MILD STEEL** Good balance of wear resistance and fracture resistance because of the flat land cutting edge. A wide chip pocket controls increasing of the cutting resistance and reduces vibration and chip jamming even at large depths of cut.		
	 MV	**FIRST RECOMMENDATION FOR MEDIUM CUTTING OF CARBON STEEL, ALLOY STEEL, MILD STEEL, STAINLESS STEEL AND CAST IRON** A positive insert and large rake angle achieves sharp cutting edge performance. Double chipbreaker in the rake face achieve a wide range of chip discharge.		
	 Standard	**ALTERNATIVE CHIPBREAKER FOR MEDIUM CUTTING OF CARBON STEEL, ALLOY STEEL AND STAINLESS STEEL** Standard, general purpose chipbreaker.		
FOR CAST IRON				
M	 Flat Top	**CHIPBREAKER FOR HEAVY CUTTING OF CAST IRON** Flat top. Most effective for unstable machining due to its high edge strength.		

1/1

MC6115


CUTTING PERFORMANCE

MACHINING C45: COMPARISON OF WEAR RESISTANCE DURING CONTINUOUS DRY CUTTING


Material	C45
Insert	CNMG120408-○○
Vc (m/min)	300
f (mm/rev)	0.3
ap (mm)	1.5
Cutting mode	Dry cutting




MC6115
10 min



Conventional A
10 min



Conventional B
8 min

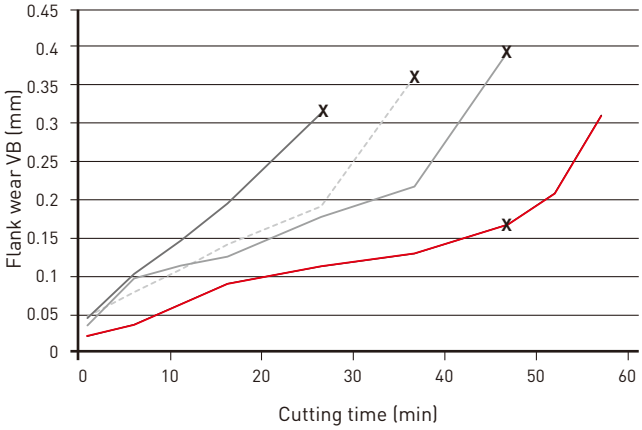


MACHINING DIN 100Cr6: COMPARISON OF WEAR RESISTANCE DURING CONTINUOUS WET CUTTING


Material	DIN 100Cr6
Insert	CNMG120408-○○
Vc (m/min)	300
f (mm/rev)	0.3
ap (mm)	1.5
Cutting mode	Wet cutting




MC6115
12 min



Conventional A
12 min



Conventional B
12 min

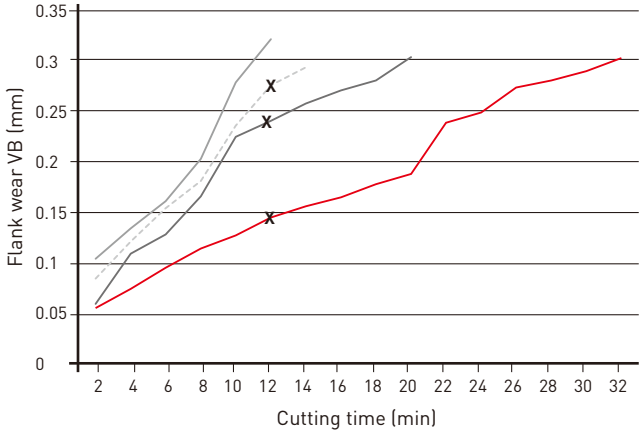

■ : **MC6115** ■ A ■ B ■ C : Conventional tool

MC6115 – CUTTING PERFORMANCE

MACHINING DIN41CRMO4: COMPARISON OF WEAR RESISTANCE DURING CONTINUOUS WET CUTTING

Material	DIN 41CrMo4
Insert	CNMG120408-◌◌
Vc (m/min)	350
f (mm/rev)	0.3
ap (mm)	1.5
Cutting mode	Wet cutting




MC6115
10 min



Conventional A
10 min



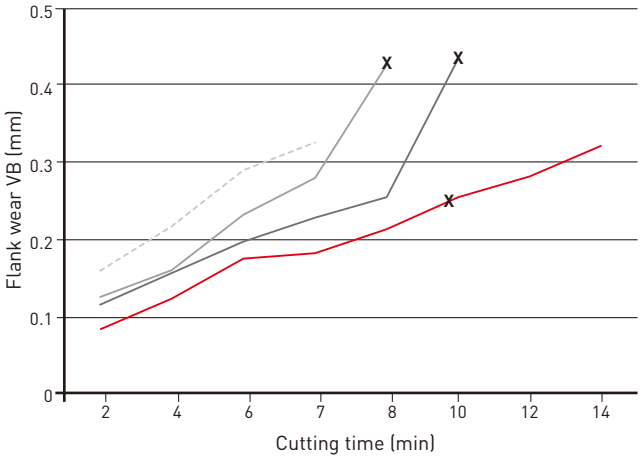Conventional B
8 min




■ : **MC6115** ■ A ■ B ■ C : Conventional tool

MC6125

CUTTING PERFORMANCE

COMPARISON OF TOUGHNESS DURING INTERRUPTED CUTTING

Material	DIN 42CrMo4
Insert	CNMG120408-○○
Vc (m/min)	200
f (mm/rev)	0.25
ap (mm)	1.5
Cutting mode	Wet cutting

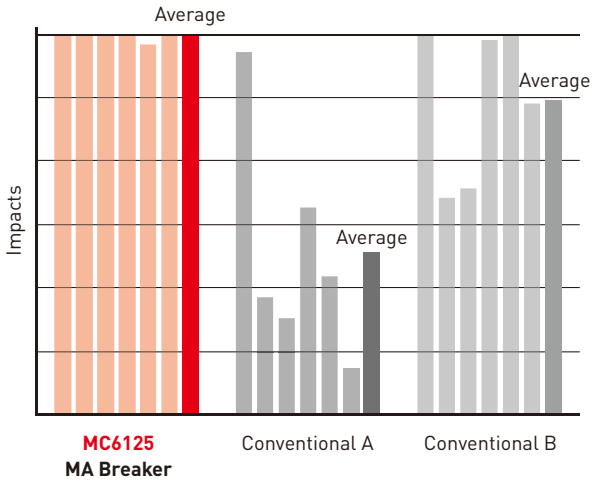

MACHINING DIN 20MNCr5: COMPARISON OF WEAR RESISTANCE DURING CONTINUOUS WET CUTTING


Material	DIN 20MNCr5
Insert	CNMG120408-○○
Vc (m/min)	300
f (mm/rev)	0.3
ap (mm)	1.5
Cutting mode	Wet cutting



MC6125
46 min



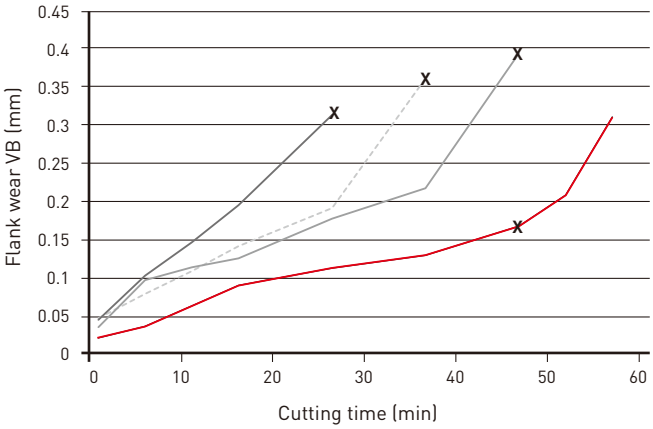Conventional A
46 min




■ : **MC6125** ■ A ■ B ■ C : Conventional tool


CNMG, CNMM

NEGATIVE INSERTS (WITH HOLE)

M Class

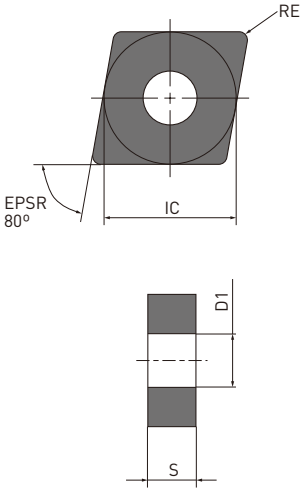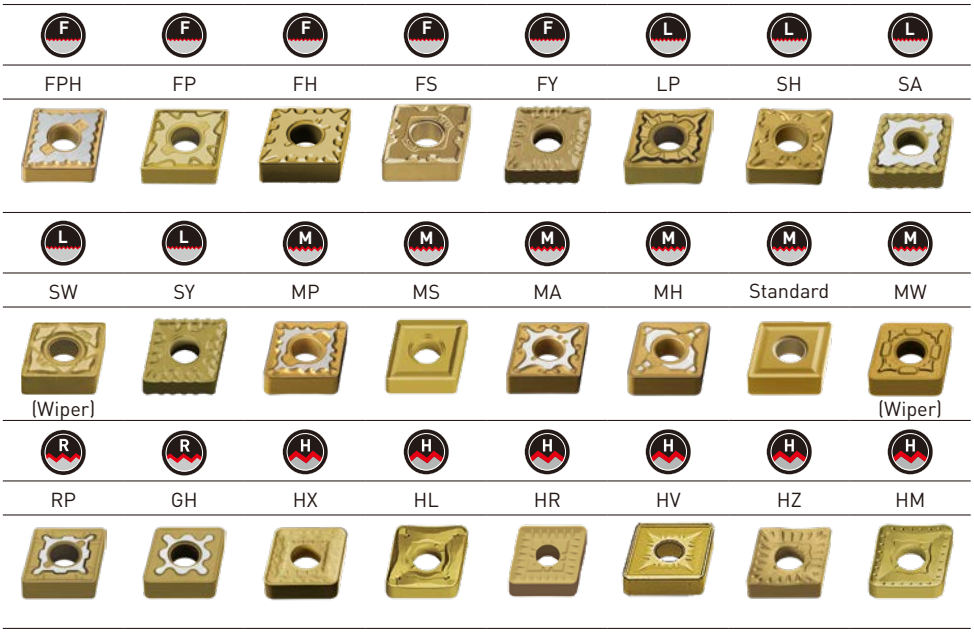CNMG, CNMM





Order number	F L M R H	MC6115	MC6125	MC6135	IC	S	RE	D1
CNMG120404-FPH	F	●	●	●	12.7	4.76	0.4	5.16
CNMG120408-FPH	F	●	●	●	12.7	4.76	0.8	5.16
CNMG120412-FPH	F	●	●	●	12.7	4.76	1.2	5.16
CNMG120402-FP	F	★	★	★	12.7	4.76	0.2	5.16
CNMG120404-FP	F	●	★	★	12.7	4.76	0.4	5.16
CNMG120408-FP	F	●	★	★	12.7	4.76	0.8	5.16
CNMG120412-FP	F	★	★	★	12.7	4.76	1.2	5.16
CNMG120402-FH	F	★	★	★	12.7	4.76	0.2	5.16
CNMG120404-FH	F	★	★	★	12.7	4.76	0.4	5.16
CNMG120408-FH	F	★	★		12.7	4.76	0.8	5.16
CNMG120404-FS	F		★	★	12.7	4.76	0.4	5.16
CNMG120404-FY	F	●	★	★	12.7	4.76	0.4	5.16
CNMG120408-FY	F	●	●	★	12.7	4.76	0.8	5.16
CNMG120404-LP	L	●	●	★	12.7	4.76	0.4	5.16
CNMG120408-LP	L	●	●	★	12.7	4.76	0.8	5.16
CNMG120412-LP	L	●	●	★	12.7	4.76	1.2	5.16
CNMG09T304-SH	L	★	●		9.525	3.97	0.4	3.81
CNMG09T308-SH	L	★	●		9.525	3.97	0.8	3.81
CNMG120404-SH	L	●	★	★	12.7	4.76	0.4	5.16
CNMG120408-SH	L	●	●	★	12.7	4.76	0.8	5.16
CNMG120412-SH	L	●	●	★	12.7	4.76	1.2	5.16
CNMG120404-SA	L	●	●	★	12.7	4.76	0.4	5.16
CNMG120408-SA	L	●	●	★	12.7	4.76	0.8	5.16
CNMG120412-SA	L	●	●	★	12.7	4.76	1.2	5.16
CNMG120404-SW	L	●	★		12.7	4.76	0.4	5.16
CNMG120408-SW	L	●	★		12.7	4.76	0.8	5.16
CNMG120412-SW	L	●	★		12.7	4.76	1.2	5.16

(10 inserts in one case)

● / ★ = Expansion

● : Inventory maintained. ★ : Inventory maintained in Japan.

CNMG, CNMM – NEGATIVE INSERTS (WITH HOLE)

Order number	F L M R H	MC6115	MC6125	MC6135	IC	S	RE	D1
CNMG120404-SY	L	★	★	★	12.7	4.76	0.4	5.16
CNMG120408-SY	L	●	●	★	12.7	4.76	0.8	5.16
CNMG120404-MP	M	●	●	●	12.7	4.76	0.4	5.16
CNMG120408-MP	M	●	●	●	12.7	4.76	0.8	5.16
CNMG120412-MP	M	●	●	●	12.7	4.76	1.2	5.16
CNMG120416-MP	M	●	●	★	12.7	4.76	1.6	5.16
CNMG160608-MP	M	★	●	★	15.875	6.35	0.8	6.35
CNMG160612-MP	M	★	●	★	15.875	6.35	1.2	6.35
CNMG160616-MP	M	★	●	★	15.875	6.35	1.6	6.35
CNMG090308-MS	M	★	★		9.525	3.18	0.8	3.81
CNMG09T308-MS	M	★	●		9.525	3.97	0.8	3.81
CNMG120404-MS	M	★	★	★	12.7	4.76	0.4	5.16
CNMG120408-MS	M	●	★	★	12.7	4.76	0.8	5.16
CNMG120412-MS	M	★	★		12.7	4.76	1.2	5.16
CNMG120404-MA	M	●	●	★	12.7	4.76	0.4	5.16
CNMG120408-MA	M	●	●	●	12.7	4.76	0.8	5.16
CNMG120412-MA	M	●	●	●	12.7	4.76	1.2	5.16
CNMG120416-MA	M	★	★	★	12.7	4.76	1.6	5.16
CNMG160608-MA	M	●	●	★	15.875	6.35	0.8	6.35
CNMG160612-MA	M	●	●	★	15.875	6.35	1.2	6.35
CNMG160616-MA	M	●	●	★	15.875	6.35	1.6	6.35
CNMG190612-MA	M	●	●	★	19.05	6.35	1.2	7.93
CNMG190616-MA	M	●	●	★	19.05	6.35	1.6	7.93
CNMG120404-MH	M	★	●	★	12.7	4.76	0.4	5.16
CNMG120408-MH	M	●	●	★	12.7	4.76	0.8	5.16
CNMG120412-MH	M	●	●	★	12.7	4.76	1.2	5.16
CNMG120416-MH	M	★	●	★	12.7	4.76	1.6	5.16
CNMG160608-MH	M	★	★		15.875	6.35	0.8	6.35
CNMG160612-MH	M	●	●	★	15.875	6.35	1.2	6.35
CNMG160616-MH	M	★	★		15.875	6.35	1.6	6.35
CNMG190612-MH	M	●	●	★	19.05	6.35	1.2	7.93
CNMG190616-MH	M	★	●	★	19.05	6.35	1.6	7.93
CNMG090308	M	★	★		9.525	3.18	0.8	3.81
CNMG09T304	M	★	★	★	9.525	3.97	0.4	3.81
CNMG09T308	M	★	★	★	9.525	3.97	0.8	3.81
CNMG120404	M	●	●	★	12.7	4.76	0.4	5.16
CNMG120408	M	●	●	★	12.7	4.76	0.8	5.16
CNMG120412	M	●	●	●	12.7	4.76	1.2	5.16
CNMG120416	M	●	●	★	12.7	4.76	1.6	5.16
CNMG160608	M	●	●	★	15.875	6.35	0.8	6.35
CNMG160612	M	●	●	★	15.875	6.35	1.2	6.35
CNMG160616	M	●	●	★	15.875	6.35	1.6	6.35
CNMG190608	M	●	●	★	19.05	6.35	0.8	7.93
CNMG190612	M	●	●	★	19.05	6.35	1.2	7.93
CNMG190616	M	●	●	★	19.05	6.35	1.6	7.93
CNMG120408-MW	M	●	●	★	12.7	4.76	0.8	5.16
CNMG120412-MW	M	●	●	★	12.7	4.76	1.2	5.16

2/3

(10 inserts in one case)

52 Vc

● : Inventory maintained. ★ : Inventory maintained in Japan.

CNMG, CNMM – NEGATIVE INSERTS (WITH HOLE)

Order number	F L M R H	MC6115	MC6125	MC6135	IC	S	RE	D1
CNMG120408-RP	R	●	●	●	12.7	4.76	0.8	5.16
CNMG120412-RP	R	●	●	●	12.7	4.76	1.2	5.16
CNMG120416-RP	R	●	●	★	12.7	4.76	1.6	5.16
CNMG160612-RP	R	●	●	●	15.875	6.35	1.2	6.35
CNMG160616-RP	R	●	●	●	15.875	6.35	1.6	6.35
CNMG190612-RP	R	●	●	●	19.05	6.35	1.2	7.93
CNMG190616-RP	R	●	●	●	19.05	6.35	1.6	7.93
NEW CNMM190624-RP*1	R	●	●		19.05	6.35	2.4	7.93
CNMG120408-GH	R	★	●	★	12.7	4.76	0.8	5.16
CNMG120412-GH	R	★	●	★	12.7	4.76	1.2	5.16
CNMG120416-GH	R	★	★		12.7	4.76	1.6	5.16
CNMG160612-GH	R	★	●	★	15.875	6.35	1.2	6.35
CNMG160616-GH	R	★	●		15.875	6.35	1.6	6.35
CNMG190612-GH	R	★	●	★	19.05	6.35	1.2	7.93
CNMG190616-GH	R	★	●	★	19.05	6.35	1.6	7.93
CNMM120408-HX	H		★	★	12.7	4.76	0.8	5.16
CNMM120412-HX	H		★	★	12.7	4.76	1.2	5.16
CNMM160612-HX	H		★	★	15.875	6.35	1.2	6.35
CNMM160616-HX	H		★	★	15.875	6.35	1.6	6.35
CNMM190612-HX	H	★	●	★	19.05	6.35	1.2	7.93
CNMM190616-HX	H	★	●	★	19.05	6.35	1.6	7.93
CNMM190624-HX	H	★	●	★	19.05	6.35	2.4	7.93
CNMM250924-HX	H	●	★	●	25.4	9.52	2.4	9.12
CNMM120408-HL	H		●	●	12.7	4.76	0.8	5.16
CNMM120412-HL	H		●	★	12.7	4.76	1.2	5.16
CNMM120416-HL	H			●	12.7	4.76	1.6	5.16
CNMM160612-HL	H		●	●	15.875	6.35	1.2	6.35
CNMM160616-HL	H		★	★	15.875	6.35	1.6	6.35
CNMM190612-HL	H	●	●	●	19.05	6.35	1.2	7.93
CNMM190616-HL	H	●	●	★	19.05	6.35	1.6	7.93
CNMM190624-HL	H	●	★	★	19.05	6.35	2.4	7.93
CNMM250924-HR	H	●	●	●	25.4	9.52	2.4	9.12
CNMM190616-HV	H	★	●	★	19.05	6.35	1.6	7.93
CNMM190624-HV	H	★	★	★	19.05	6.35	2.4	7.93
CNMM250924-HV	H	★	●	●	25.4	9.52	2.4	9.12
CNMM120408-HZ	H	●	●	★	12.7	4.76	0.8	5.16
CNMM120412-HZ	H	●	●	★	12.7	4.76	1.2	5.16
CNMM120416-HZ	H			★	12.7	4.76	1.6	5.16
CNMM160612-HZ	H	●	●	★	15.875	6.35	1.2	6.35
CNMM160616-HZ	H	★	★	★	15.875	6.35	1.6	6.35
CNMM190612-HZ	H	★	●	★	19.05	6.35	1.2	7.93
CNMM190616-HZ	H	★	●	★	19.05	6.35	1.6	7.93
CNMM160612-HM	H		●	★	15.875	6.35	1.2	6.35
CNMM160616-HM	H		★	★	15.875	6.35	1.6	6.35
CNMM190612-HM	H	●	●	●	19.05	6.35	1.2	7.93
CNMM190616-HM	H	●	●	★	19.05	6.35	1.6	7.93
CNMM190624-HM	H	●	★	★	19.05	6.35	2.4	7.93
CNMM250924-HM	H	★	★	●	25.4	9.52	2.4	9.12

(10 inserts in one case)

*1 The RP type is a single-sided chipbreaker.

● / ★ = Expansion

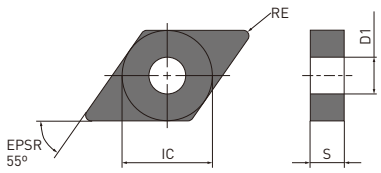
● : Inventory maintained. ★ : Inventory maintained in Japan.

DNMG, DNMX, DNMM, RNMG


NEGATIVE INSERTS (WITH HOLE)


M Class

DNMG, DNMX, DNMM



RNMG

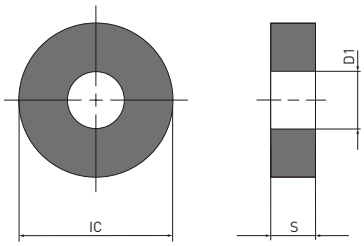

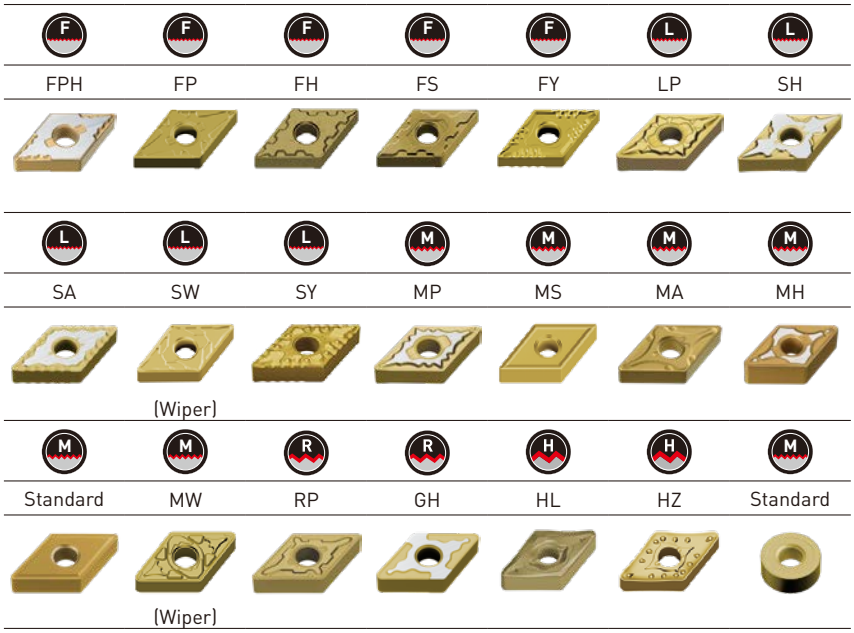

Order number	F L M R H	MC6115	MC6125	MC6135	IC	S	RE	D1
DNMG150404-FPH	F	★	★	★	12.7	4.76	0.4	5.16
DNMG150408-FPH	F	★	★	★	12.7	4.76	0.8	5.16
DNMG150412-FPH	F	★	★	★	12.7	4.76	1.2	5.16
DNMG150604-FPH	F	●	●	●	12.7	6.35	0.4	5.16
DNMG150608-FPH	F	●	●	●	12.7	6.35	0.8	5.16
DNMG150612-FPH	F	●	●	●	12.7	6.35	1.2	5.16
DNMG150402-FP	F	★	★	★	12.7	4.76	0.2	5.16
DNMG150404-FP	F	★	★	★	12.7	4.76	0.4	5.16
DNMG150408-FP	F	★	★	★	12.7	4.76	0.8	5.16
DNMG150412-FP	F	★	★	★	12.7	4.76	1.2	5.16
DNMG150602-FP	F	★	★	★	12.7	6.35	0.2	5.16
DNMG150604-FP	F	●	★	★	12.7	6.35	0.4	5.16
DNMG150608-FP	F	●	★	★	12.7	6.35	0.8	5.16
DNMG150612-FP	F	★	★	★	12.7	6.35	1.2	5.16
DNMG150402-FH	F	★	★	★	12.7	4.76	0.2	5.16
DNMG150404-FH	F	★	★		12.7	4.76	0.4	5.16
DNMG150408-FH	F	★	★		12.7	4.76	0.8	5.16
DNMG150602-FH	F	★	★	★	12.7	6.35	0.2	5.16
DNMG150604-FH	F	●	★	★	12.7	6.35	0.4	5.16
DNMG150608-FH	F	★	★	★	12.7	6.35	0.8	5.16
DNMG150408-FS	F		★	★	12.7	4.76	0.8	5.16
DNMG150404-FY	F	★	★	★	12.7	4.76	0.4	5.16
DNMG150408-FY	F	★	★	★	12.7	4.76	0.8	5.16
DNMG150608-FY	F	●	●	★	12.7	6.35	0.8	5.16

(10 inserts in one case)

52 Vc

● / ★ = Expansion

● : Inventory maintained. ★ : Inventory maintained in Japan.

DNMG, DNMX, DNMM, RNMG – NEGATIVE INSERTS (WITH HOLE)

Order number	F L M R H	MC6115	MC6125	MC6135	IC	S	RE	D1
DNMG110404-LP	L	●	●	●	9.525	4.76	0.4	3.81
DNMG110408-LP	L	●	●	●	9.525	4.76	0.8	3.81
DNMG150404-LP	L	●	●	★	12.7	4.76	0.4	5.16
DNMG150408-LP	L	●	●	★	12.7	4.76	0.8	5.16
DNMG150412-LP	L	●	●	★	12.7	4.76	1.2	5.16
DNMG150604-LP	L	●	●	★	12.7	6.35	0.4	5.16
DNMG150608-LP	L	●	●	★	12.7	6.35	0.8	5.16
DNMG150612-LP	L	●	●	★	12.7	6.35	1.2	5.16
DNMG110404-SH	L	●	★		9.525	4.76	0.4	3.81
DNMG110408-SH	L	●	●		9.525	4.76	0.8	3.81
DNMG150404-SH	L	★	★	★	12.7	4.76	0.4	5.16
DNMG150408-SH	L	★	★	★	12.7	4.76	0.8	5.16
DNMG150412-SH	L	★	★	★	12.7	4.76	1.2	5.16
DNMG150604-SH	L	●	●		12.7	6.35	0.4	5.16
DNMG150608-SH	L	●	●		12.7	6.35	0.8	5.16
DNMG150612-SH	L	●	★		12.7	6.35	1.2	5.16
DNMG150404-SA	L	★	●	★	12.7	4.76	0.4	5.16
DNMG150408-SA	L	★	●	★	12.7	4.76	0.8	5.16
DNMG150412-SA	L	★	★	★	12.7	4.76	1.2	5.16
DNMG150604-SA	L	●	●	★	12.7	6.35	0.4	5.16
DNMG150608-SA	L	●	●	★	12.7	6.35	0.8	5.16
DNMG150612-SA	L	●	●	★	12.7	6.35	1.2	5.16
DNMX110404-SW	L	●	●		9.525	4.76	0.4	3.81
DNMX110408-SW	L	●	●		9.525	4.76	0.8	3.81
DNMX150404-SW	L	●	●		12.7	4.76	0.4	5.16
DNMX150408-SW	L	●	●		12.7	4.76	0.8	5.16
DNMX150412-SW	L	●	★		12.7	4.76	1.2	5.16
DNMX150604-SW	L	●	●		12.7	6.35	0.4	5.16
DNMX150608-SW	L	●	●		12.7	6.35	0.8	5.16
DNMX150612-SW	L	●	●		12.7	6.35	1.2	5.16
DNMG150404-SY	L	●	●	★	12.7	4.76	0.4	5.16
DNMG150408-SY	L	●	●	★	12.7	4.76	0.8	5.16
DNMG150608-SY	L	●	●	★	12.7	6.35	0.8	5.16
DNMG150404-MP	M	●	●	★	12.7	4.76	0.4	5.16
DNMG150408-MP	M	●	●	★	12.7	4.76	0.8	5.16
DNMG150412-MP	M	●	●	★	12.7	4.76	1.2	5.16
DNMG150416-MP	M	★	●	★	12.7	4.76	1.6	5.16
DNMG150604-MP	M	●	●	●	12.7	6.35	0.4	5.16
DNMG150608-MP	M	●	●	●	12.7	6.35	0.8	5.16
DNMG150612-MP	M	●	●	★	12.7	6.35	1.2	5.16
DNMG150616-MP	M	●	●	●	12.7	6.35	1.6	5.16
DNMG110408-MS	M	★	●		9.525	4.76	0.8	3.81
DNMG150404-MS	M	★	★	★	12.7	4.76	0.4	5.16
DNMG150408-MS	M	★	★		12.7	4.76	0.8	5.16
DNMG150412-MS	M	★	★		12.7	4.76	1.2	5.16
DNMG150604-MS	M	●	●		12.7	6.35	0.4	5.16
DNMG150608-MS	M	★	★		12.7	6.35	0.8	5.16
DNMG150612-MS	M	★	★		12.7	6.35	1.2	5.16

2/3

(10 inserts in one case)

● : Inventory maintained. ★ : Inventory maintained in Japan.

DNMG, DNMX, DNMM, RNMG – NEGATIVE INSERTS (WITH HOLE)

Order number	F L M R H	MC6115	MC6125	MC6135	IC	S	RE	D1
DNMG110404-MA	M	●	●	★	9.525	4.76	0.4	3.81
DNMG110408-MA	M	●	●	★	9.525	4.76	0.8	3.81
DNMG110412-MA	M	●	★	★	9.525	4.76	1.2	3.81
DNMG150404-MA	M	●	●	★	12.7	4.76	0.4	5.16
DNMG150408-MA	M	●	●	●	12.7	4.76	0.8	5.16
DNMG150412-MA	M	●	●	★	12.7	4.76	1.2	5.16
DNMG150604-MA	M	●	●	★	12.7	6.35	0.4	5.16
DNMG150608-MA	M	●	●	●	12.7	6.35	0.8	5.16
DNMG150612-MA	M	●	●	★	12.7	6.35	1.2	5.16
DNMG150616-MA	M	●	●		12.7	6.35	1.6	5.16
DNMG150404-MH	M	★	★	★	12.7	4.76	0.4	5.16
DNMG150408-MH	M	●	●	★	12.7	4.76	0.8	5.16
DNMG150412-MH	M	●	●	★	12.7	4.76	1.2	5.16
DNMG150604-MH	M	★	★		12.7	6.35	0.4	5.16
DNMG150608-MH	M	●	●	★	12.7	6.35	0.8	5.16
DNMG150612-MH	M	●	●	★	12.7	6.35	1.2	5.16
DNMG110408	M	★	●		9.525	4.76	0.8	3.81
DNMG150404	M	●	●	★	12.7	4.76	0.4	5.16
DNMG150408	M	●	●	★	12.7	4.76	0.8	5.16
DNMG150412	M	●	●	★	12.7	4.76	1.2	5.16
DNMG150416	M	★	★	★	12.7	4.76	1.6	5.16
DNMG150604	M	●	●	★	12.7	6.35	0.4	5.16
DNMG150608	M	●	●	★	12.7	6.35	0.8	5.16
DNMG150612	M	●	●	★	12.7	6.35	1.2	5.16
DNMG150616	M	●	★	★	12.7	6.35	1.6	5.16
DNMX150408-MW	M	●	★		12.7	4.76	0.8	5.16
DNMX150412-MW	M	●	★		12.7	4.76	1.2	5.16
DNMX150608-MW	M	●	●		12.7	6.35	0.8	5.16
DNMX150612-MW	M	●	●		12.7	6.35	1.2	5.16
DNMG150408-RP	R	●	●	★	12.7	4.76	0.8	5.16
DNMG150412-RP	R	●	●	★	12.7	4.76	1.2	5.16
DNMG150416-RP	R	★	★	★	12.7	4.76	1.6	5.16
DNMG150608-RP	R	●	●	●	12.7	6.35	0.8	5.16
DNMG150612-RP	R	●	●	●	12.7	6.35	1.2	5.16
DNMG150616-RP	R	●	●	●	12.7	6.35	1.6	5.16
DNMG150408-GH	R	★	●	★	12.7	4.76	0.8	5.16
DNMG150412-GH	R	★	★	★	12.7	4.76	1.2	5.16
DNMG150608-GH	R	★	●	★	12.7	6.35	0.8	5.16
DNMG150612-GH	R	★	●	★	12.7	6.35	1.2	5.16
DNMM150408-HL	H		★	★	12.7	4.76	0.8	5.16
DNMM150412-HL	H		★	★	12.7	4.76	1.2	5.16
DNMM150608-HL	H		●	●	12.7	6.35	0.8	5.16
DNMM150612-HL	H		●	★	12.7	6.35	1.2	5.16
DNMM150408-HZ	H	★	★	★	12.7	4.76	0.8	5.16
DNMM150412-HZ	H	★	★	★	12.7	4.76	1.2	5.16
DNMM150608-HZ	H	★	●	★	12.7	6.35	0.8	5.16
DNMM150612-HZ	H	★	★	★	12.7	6.35	1.2	5.16
RNMG120400	M	★	●	★	12.0	4.76	—	5.16

(10 inserts in one case)

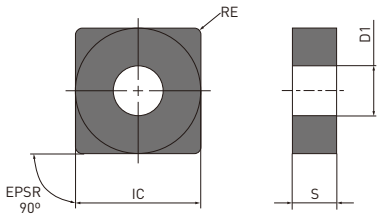
● : Inventory maintained. ★ : Inventory maintained in Japan.

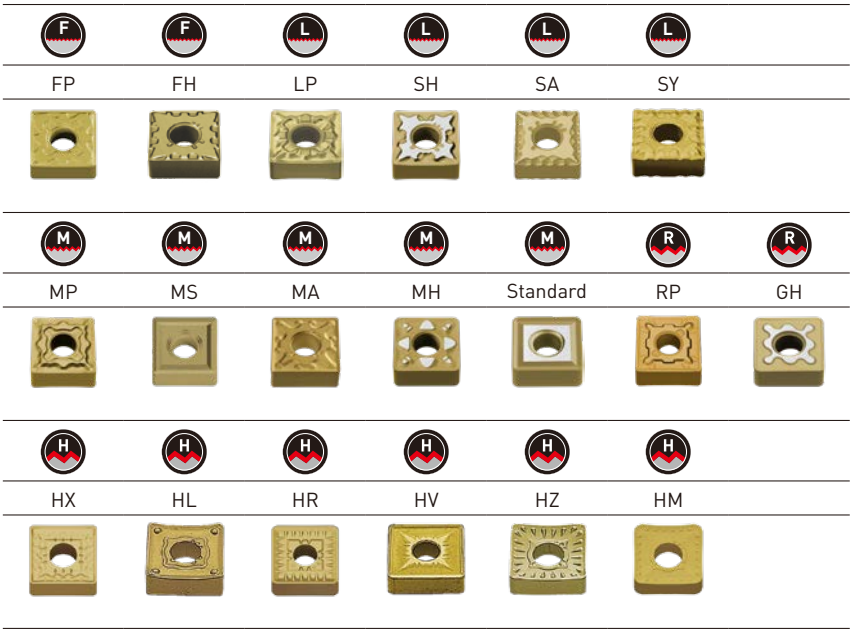
SNMG, SNMM

NEGATIVE INSERTS (WITH HOLE)

M Class

SNMG, SNMM





Order number	F L M R H	MC6115	MC6125	MC6135	IC	S	RE	D1
SNMG120404-FP	F	★	★	★	12.7	4.76	0.4	5.16
SNMG120408-FP	F	★	★	★	12.7	4.76	0.8	5.16
SNMG120412-FP	F	★	★	★	12.7	4.76	1.2	5.16
SNMG120404-FH	F	★	★		12.7	4.76	0.4	5.16
SNMG120408-FH	F	★	★		12.7	4.76	0.8	5.16
SNMG120404-LP	L	●	●	★	12.7	4.76	0.4	5.16
SNMG120408-LP	L	●	●	●	12.7	4.76	0.8	5.16
SNMG120412-LP	L	●	●	★	12.7	4.76	1.2	5.16
SNMG120404-SH	L	★	★		12.7	4.76	0.4	5.16
SNMG120408-SH	L	★	●	★	12.7	4.76	0.8	5.16
SNMG120412-SH	L	★	★	★	12.7	4.76	1.2	5.16
SNMG120404-SA	L	★	★		12.7	4.76	0.4	5.16
SNMG120408-SA	L	★	●	★	12.7	4.76	0.8	5.16
SNMG120412-SA	L	●	●	★	12.7	4.76	1.2	5.16
SNMG120408-SY	L	●	★	★	12.7	4.76	0.8	5.16

1/3

(10 inserts in one case)

● : Inventory maintained. ★ : Inventory maintained in Japan.

SNMG, SNMM – NEGATIVE INSERTS (WITH HOLE)

Order number	F L M R H	MC6115	MC6125	MC6135	IC	S	RE	D1
SNMG120404-MP	M	●	●	★	12.7	4.76	0.4	5.16
SNMG120408-MP	M	●	●	★	12.7	4.76	0.8	5.16
SNMG120412-MP	M	●	●	★	12.7	4.76	1.2	5.16
SNMG120404-MS	M	★	★		12.7	4.76	0.4	5.16
SNMG120408-MS	M	★	★	★	12.7	4.76	0.8	5.16
SNMG120412-MS	M	★	★		12.7	4.76	1.2	5.16
SNMG120404-MA	M	●	●	★	12.7	4.76	0.4	5.16
SNMG120408-MA	M	●	●	●	12.7	4.76	0.8	5.16
SNMG120412-MA	M	●	●	★	12.7	4.76	1.2	5.16
SNMG150608-MA	M	★	●	★	15.875	6.35	0.8	6.35
SNMG150612-MA	M	●	●	★	15.875	6.35	1.2	6.35
SNMG150616-MA	M	★	★	★	15.875	6.35	1.6	6.35
SNMG190612-MA	M	●	●	★	19.05	6.35	1.2	7.93
SNMG190616-MA	M	●	●	★	19.05	6.35	1.6	7.93
SNMG120408-MH	M	●	●	★	12.7	4.76	0.8	5.16
SNMG120412-MH	M	●	●	★	12.7	4.76	1.2	5.16
SNMG190612-MH	M	★	●	★	19.05	6.35	1.2	7.93
SNMG190616-MH	M	★	●	★	19.05	6.35	1.6	7.93
SNMG090304	M	★	●	★	9.525	3.18	0.4	3.81
SNMG090308	M	●	●	★	9.525	3.18	0.8	3.81
SNMG120404	M	●	●	★	12.7	4.76	0.4	5.16
SNMG120408	M	●	●	●	12.7	4.76	0.8	5.16
SNMG120412	M	●	●	★	12.7	4.76	1.2	5.16
SNMG120416	M	★	●	★	12.7	4.76	1.6	5.16
SNMG120420	M	★	●	★	12.7	4.76	2.0	5.16
SNMG150612	M	●	●	★	15.875	6.35	1.2	6.35
SNMG150616	M	★	★	★	15.875	6.35	1.6	6.35
SNMG190612	M	●	●	★	19.05	6.35	1.2	7.93
SNMG190616	M	●	●	★	19.05	6.35	1.6	7.93

2/3

(10 inserts in one case)

52 Vc

● : Inventory maintained. ★ : Inventory maintained in Japan.

SNMG, SNMM – NEGATIVE INSERTS (WITH HOLE)

	Order number	F L M R H	MC6115	MC6125	MC6135	IC	S	RE	D1
	SNMG120408-RP	R	●	●	★	12.7	4.76	0.8	5.16
	SNMG120412-RP	R	●	●	●	12.7	4.76	1.2	5.16
	SNMG120416-RP	R	●	●	★	12.7	4.76	1.6	5.16
	SNMG150612-RP	R	●	●	●	15.875	6.35	1.2	6.35
	SNMG150616-RP	R	●	●	★	15.875	6.35	1.6	6.35
	SNMG190612-RP	R	●	●	●	19.05	6.35	1.2	7.93
	SNMG190616-RP	R	●	●	★	19.05	6.35	1.6	7.93
NEW	SNMM190624-RP*1	R	●	●		19.05	6.35	2.4	7.93
	SNMG120408-GH	R	★	●	★	12.7	4.76	0.8	5.16
	SNMG120412-GH	R	★	●	★	12.7	4.76	1.2	5.16
	SNMG120416-GH	R	★	★		12.7	4.76	1.6	5.16
	SNMG150612-GH	R	★	●		15.875	6.35	1.2	6.35
	SNMG150616-GH	R	●	●		15.875	6.35	1.6	6.35
	SNMG190612-GH	R	★	●		19.05	6.35	1.2	7.93
	SNMG190616-GH	R	★	●		19.05	6.35	1.6	7.93
	SNMM120408-HX	H		★	★	12.7	4.76	0.8	5.16
	SNMM120412-HX	H		★	★	12.7	4.76	1.2	5.16
	SNMM150612-HX	H		★	★	15.875	6.35	1.2	6.35
	SNMM190612-HX	H	★	●	★	19.05	6.35	1.2	7.93
	SNMM190616-HX	H	★	●	★	19.05	6.35	1.6	7.93
	SNMM190624-HX	H	●	★	★	19.05	6.35	2.4	7.93
	SNMM250724-HX	H	★	★	●	25.4	7.94	2.4	9.12
NEW	SNMM250732-HX	H		●		25.4	7.94	3.2	9.12
	SNMM250924-HX	H	★	★	●	25.4	9.52	2.4	9.12
	SNMM120408-HL	H		●	★	12.7	4.76	0.8	5.16
	SNMM120412-HL	H		●	★	12.7	4.76	1.2	5.16
	SNMM150612-HL	H		●	●	15.875	6.35	1.2	6.35
	SNMM190612-HL	H	●	●	★	19.05	6.35	1.2	7.93
	SNMM190616-HL	H	●	●	★	19.05	6.35	1.6	7.93
	SNMM190624-HL	H	●	★	★	19.05	6.35	2.4	7.93
	SNMM250724-HR	H	●	★	●	25.4	7.94	2.4	9.12
NEW	SNMM250732-HR	H		●		25.4	7.94	3.2	9.12
	SNMM250924-HR	H	●	★	●	25.4	9.52	2.4	9.12
	SNMM190616-HV	H	★	●	★	19.05	6.35	1.6	7.93
	SNMM190624-HV	H	★	★	★	19.05	6.35	2.4	7.93
	SNMM250724-HV	H	★	●	●	25.4	7.94	2.4	9.12
	SNMM250924-HV	H	★	●	●	25.4	9.52	2.4	9.12
	SNMM120408-HZ	H	★	★	★	12.7	4.76	0.8	5.16
	SNMM120412-HZ	H	★	★	★	12.7	4.76	1.2	5.16
	SNMM150612-HZ	H	★	★	★	15.875	6.35	1.2	6.35
	SNMM190612-HZ	H	★	●	●	19.05	6.35	1.2	7.93
	SNMM190616-HZ	H	★	●	★	19.05	6.35	1.6	7.93
	SNMM150612-HM	H		★	★	15.875	6.35	1.2	6.35
	SNMM190612-HM	H	●	★	★	19.05	6.35	1.2	7.93
	SNMM190616-HM	H	●	●	★	19.05	6.35	1.6	7.93
	SNMM190624-HM	H	●	★	●	19.05	6.35	2.4	7.93
	SNMM250724-HM	H	★	★	●	25.4	7.94	2.4	9.12
NEW	SNMM250732-HM	H		●		25.4	7.94	3.2	9.12
	SNMM250924-HM	H	★	★	●	25.4	9.52	2.4	9.12

(10 inserts in one case)

*1 TheRP type is a single-sided chipbreaker.

● / ★ = Expansion

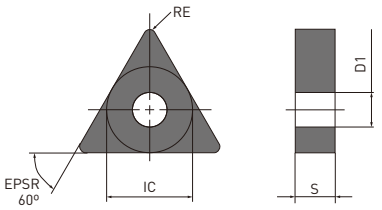
● : Inventory maintained. ★ : Inventory maintained in Japan.

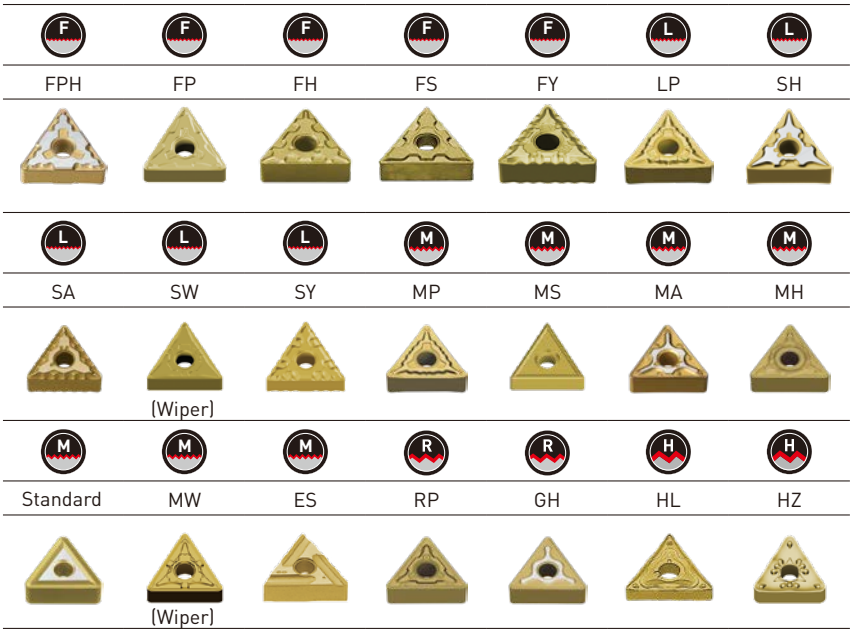
TNMG, TNMX, TNMM

NEGATIVE INSERTS (WITH HOLE)

M Class

TNMG, TNMX, TNMM





Order number	F L M R H	MC6115	MC6125	MC6135	IC	S	RE	D1
TNMG160404-FPH	F	●	●	●	9.525	4.76	0.4	3.81
TNMG160408-FPH	F	●	●	●	9.525	4.76	0.8	3.81
TNMG160412-FPH	F	●	●	●	9.525	4.76	1.2	3.81
TNMG160402-FP	F	★	★	★	9.525	4.76	0.2	3.81
TNMG160404-FP	F	●	★	★	9.525	4.76	0.4	3.81
TNMG160408-FP	F	★	★	★	9.525	4.76	0.8	3.81
TNMG160412-FP	F	★	★	★	9.525	4.76	1.2	3.81
TNMG160402-FH	F	★	★	★	9.525	4.76	0.2	3.81
TNMG160404-FH	F	●	★		9.525	4.76	0.4	3.81
TNMG160408-FH	F	●	★	★	9.525	4.76	0.8	3.81
TNMG160404-FS	F		★	★	9.525	4.76	0.4	3.81
TNMG160408-FS	F		★	★	9.525	4.76	0.8	3.81
TNMG160404-FY	F	●	●	★	9.525	4.76	0.4	3.81
TNMG160408-FY	F	●	★	★	9.525	4.76	0.8	3.81
TNMG160404-LP	L	●	●	★	9.525	4.76	0.4	3.81
TNMG160408-LP	L	●	●	★	9.525	4.76	0.8	3.81
TNMG160412-LP	L	●	●	★	9.525	4.76	1.2	3.81
TNMG220408-LP	L	●	●	★	12.7	4.76	0.8	5.16
TNMG220412-LP	L	●	●	★	12.7	4.76	1.2	5.16
TNMG160404-SH	L	★	★	★	9.525	4.76	0.4	3.81
TNMG160408-SH	L	★	★	★	9.525	4.76	0.8	3.81
TNMG220408-SH	L	★	★		12.7	4.76	0.8	5.16

(10 inserts in one case)

52 Vc

● / ★ = Expansion

● : Inventory maintained. ★ : Inventory maintained in Japan.

TNMG, TNMX, TNMM – NEGATIVE INSERTS (WITH HOLE)

Order number	F L M R H	MC6115	MC6125	MC6135	IC	S	RE	D1
TNMG160404-SA	L	★	★	★	9.525	4.76	0.4	3.81
TNMG160408-SA	L	★	★	★	9.525	4.76	0.8	3.81
TNMG160412-SA	L	★	●	★	9.525	4.76	1.2	3.81
TNMG220408-SA	L	●	★	★	12.7	4.76	0.8	5.16
TNMG220412-SA	L	★	★		12.7	4.76	1.2	5.16
TNMX160404-SW	L	●	●		9.525	4.76	0.4	3.81
TNMX160408-SW	L	●	●		9.525	4.76	0.8	3.81
TNMG160404-SY	L	●	★	★	9.525	4.76	0.4	3.81
TNMG160408-SY	L	●	●	★	9.525	4.76	0.8	3.81
TNMG160404-MP	M	●	●	★	9.525	4.76	0.4	3.81
TNMG160408-MP	M	●	●	★	9.525	4.76	0.8	3.81
TNMG160412-MP	M	●	●	★	9.525	4.76	1.2	3.81
TNMG220408-MP	M	●	●	★	12.7	4.76	0.8	5.16
TNMG220412-MP	M	●	●	★	12.7	4.76	1.2	5.16
TNMG160404-MS	M	★	★		9.525	4.76	0.4	3.81
TNMG160408-MS	M	★	★	★	9.525	4.76	0.8	3.81
TNMG160412-MS	M	★	★		9.525	4.76	1.2	3.81
TNMG220408-MS	M	★	★		12.7	4.76	0.8	5.16
TNMG160404-MA	M	●	●	★	9.525	4.76	0.4	3.81
TNMG160408-MA	M	●	●	●	9.525	4.76	0.8	3.81
TNMG160412-MA	M	●	●	★	9.525	4.76	1.2	3.81
TNMG220408-MA	M	●	●	★	12.7	4.76	0.8	5.16
TNMG220412-MA	M	●	●	★	12.7	4.76	1.2	5.16
TNMG270608-MA	M	★	★	★	15.875	6.35	0.8	6.35
TNMG270612-MA	M	★	★	★	15.875	6.35	1.2	6.35
TNMG160404-MH	M	★	●	★	9.525	4.76	0.4	3.81
TNMG160408-MH	M	●	●	★	9.525	4.76	0.8	3.81
TNMG160412-MH	M	●	●	★	9.525	4.76	1.2	3.81
TNMG220408-MH	M	●	●	★	12.7	4.76	0.8	5.16
TNMG220412-MH	M	●	●	★	12.7	4.76	1.2	5.16
TNMG110304	M	★	●	★	6.35	3.18	0.4	2.26
TNMG110308	M	★	★	★	6.35	3.18	0.8	2.26
TNMG160304	M	★	★	★	9.525	3.18	0.4	3.81
TNMG160308	M	★	★	★	9.525	3.18	0.8	3.81
TNMG160404	M	●	●	★	9.525	4.76	0.4	3.81
TNMG160408	M	●	●	★	9.525	4.76	0.8	3.81
TNMG160412	M	●	●	★	9.525	4.76	1.2	3.81
TNMG160416	M	★	★	★	9.525	4.76	1.6	3.81
TNMG220404	M	●	●	★	12.7	4.76	0.4	5.16
TNMG220408	M	●	●	★	12.7	4.76	0.8	5.16
TNMG220412	M	●	●	★	12.7	4.76	1.2	5.16
TNMG220416	M	★	★	★	12.7	4.76	1.6	5.16
TNMG270608	M	★	★	★	15.875	6.35	0.8	6.35
TNMG270612	M	★	★	★	15.875	6.35	1.2	6.35
TNMG270616	M	★	★	★	15.875	6.35	1.6	6.35

2/3

(10 inserts in one case)

52

● : Inventory maintained. ★ : Inventory maintained in Japan.

TNMG, TNMX, TNMM – NEGATIVE INSERTS (WITH HOLE)

Order number	F L M R H	MC6115	MC6125	MC6135	IC	S	RE	D1
TNMX160408-MW	M	●	●		9.525	4.76	0.8	3.81
TNMX160412-MW	M	●	●		9.525	4.76	1.2	3.81
TNMG160404R-ES	M	★	★		9.525	4.76	0.4	3.81
TNMG160404L-ES	M	★	★		9.525	4.76	0.4	3.81
TNMG160408R-ES	M	★	★		9.525	4.76	0.8	3.81
TNMG160408L-ES	M	★	★		9.525	4.76	0.8	3.81
TNMG220408R-ES	M	★	★		12.7	4.76	0.8	5.16
TNMG220408L-ES	M	★	★		12.7	4.76	0.8	5.16
TNMG160408-RP	R	●	●	★	9.525	4.76	0.8	3.81
TNMG160412-RP	R	●	●	★	9.525	4.76	1.2	3.81
TNMG220408-RP	R	●	●	●	12.7	4.76	0.8	5.16
TNMG220412-RP	R	●	●	★	12.7	4.76	1.2	5.16
TNMG220416-RP	R	●	●	★	12.7	4.76	1.6	5.16
TNMG270612-RP	R	★	★	★	15.875	6.35	1.2	6.35
TNMG270616-RP	R	★	★	★	15.875	6.35	1.6	6.35
TNMG160408-GH	R	★	★	★	9.525	4.76	0.8	3.81
TNMG160412-GH	R	★	★		9.525	4.76	1.2	3.81
TNMG220408-GH	R	★	★	★	12.7	4.76	0.8	5.16
TNMG220412-GH	R	★	★	★	12.7	4.76	1.2	5.16
TNMG220416-GH	R	★	★		12.7	4.76	1.6	5.16
TNMG270612-GH	R	★	★	★	15.875	6.35	1.2	6.35
TNMG270616-GH	R	★	★		15.875	6.35	1.6	6.35
TNMM160408-HL	H		●	★	9.525	4.76	0.8	3.81
TNMM160412-HL	H		●	●	9.525	4.76	1.2	3.81
TNMM220408-HL	H		●	★	12.7	4.76	0.8	5.16
TNMM220412-HL	H		●	●	12.7	4.76	1.2	5.16
TNMM220416-HL	H		★	★	12.7	4.76	1.6	5.16
TNMM160408-HZ	H	★	★	★	9.525	4.76	0.8	3.81
TNMM160412-HZ	H		★	★	9.525	4.76	1.2	3.81
TNMM220408-HZ	H	★	●	★	12.7	4.76	0.8	5.16
TNMM220412-HZ	H	★	●	★	12.7	4.76	1.2	5.16
TNMM220416-HZ	H	★	●	★	12.7	4.76	1.6	5.16

(10 inserts in one case)

52 Vc

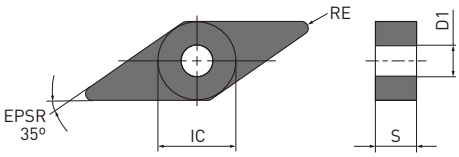
● : Inventory maintained. ★ : Inventory maintained in Japan.

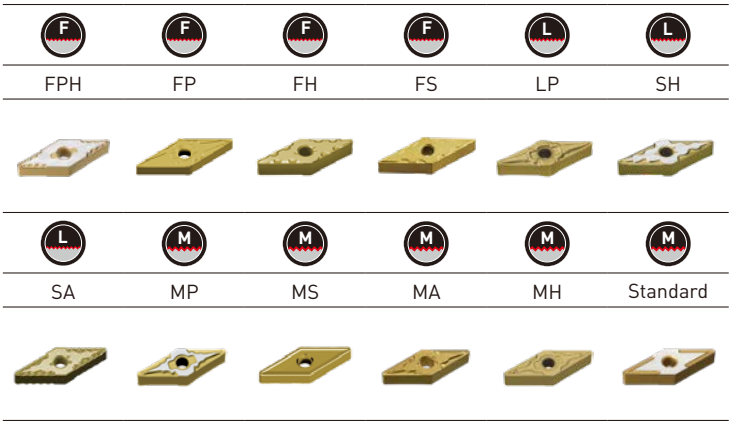
VNMG

NEGATIVE INSERTS (WITH HOLE)

M Class

VNMG





Order number	F L M R H	MC6115	MC6125	MC6135	IC	S	RE	D1
VNMG160404-FPH	F	●	●	●	9.525	4.76	0.4	3.81
VNMG160408-FPH	F	●	●	●	9.525	4.76	0.8	3.81
VNMG160412-FPH	F	●	●	●	9.525	4.76	1.2	3.81
VNMG160402-FP	F	★	★	★	9.525	4.76	0.2	3.81
VNMG160404-FP	F	●	★	★	9.525	4.76	0.4	3.81
VNMG160408-FP	F	★	★	★	9.525	4.76	0.8	3.81
VNMG160412-FP	F	★	★	★	9.525	4.76	1.2	3.81
VNMG160402-FH	F	★	★	★	9.525	4.76	0.2	3.81
VNMG160404-FH	F	★	★	★	9.525	4.76	0.4	3.81
VNMG160408-FH	F	★	★	★	9.525	4.76	0.8	3.81
VNMG160404-FS	F		★	★	9.525	4.76	0.4	3.81
VNMG160408-FS	F		★	★	9.525	4.76	0.8	3.81
VNMG160404-LP	L	●	●	★	9.525	4.76	0.4	3.81
VNMG160408-LP	L	●	●	★	9.525	4.76	0.8	3.81
VNMG160404-SH	L	●	●	★	9.525	4.76	0.4	3.81
VNMG160408-SH	L	●	●	★	9.525	4.76	0.8	3.81
VNMG160404-SA	L	●	★	★	9.525	4.76	0.4	3.81
VNMG160408-SA	L	●	●	★	9.525	4.76	0.8	3.81
VNMG160404-MP	M	●	●	★	9.525	4.76	0.4	3.81
VNMG160408-MP	M	●	●	●	9.525	4.76	0.8	3.81
VNMG160412-MP	M	●	●	★	9.525	4.76	1.2	3.81
VNMG160404-MS	M	★	●		9.525	4.76	0.4	3.81
VNMG160408-MS	M	★	★		9.525	4.76	0.8	3.81
VNMG160404-MA	M	●	●	★	9.525	4.76	0.4	3.81
VNMG160408-MA	M	●	●	★	9.525	4.76	0.8	3.81
VNMG160404-MH	M	★	★	★	9.525	4.76	0.4	3.81
VNMG160408-MH	M	●	●	★	9.525	4.76	0.8	3.81
VNMG160404	M	●	●	★	9.525	4.76	0.4	3.81
VNMG160408	M	●	●	★	9.525	4.76	0.8	3.81
VNMG160412	M	●	●	★	9.525	4.76	1.2	3.81

(10 inserts in one case)

52 Vc

● / ★ = Expansion


● : Inventory maintained. ★ : Inventory maintained in Japan.


WNMG

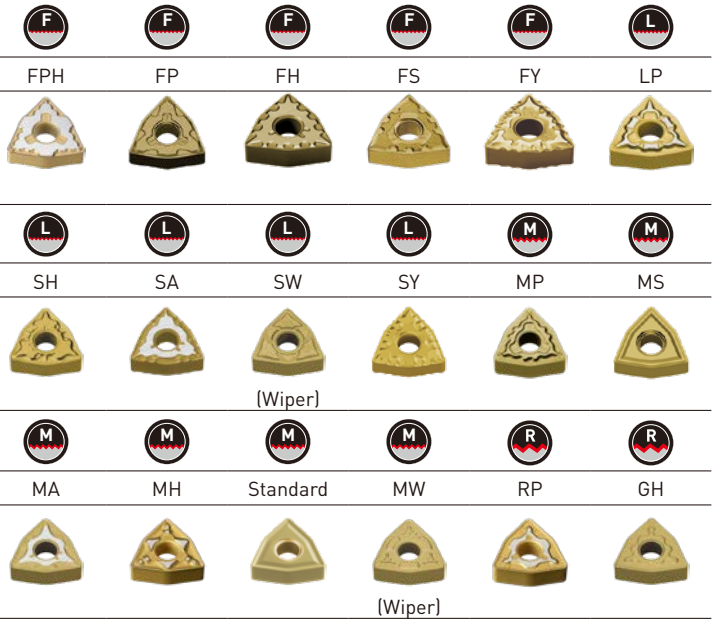
NEGATIVE INSERTS (WITH HOLE)

M Class

WNMG







Order number	F L M R H	MC6115	MC6125	MC6135	IC	S	RE	D1
WNMG080404-FPH	F	●	●	●	12.7	4.76	0.4	5.16
WNMG080408-FPH	F	●	●	●	12.7	4.76	0.8	5.16
WNMG080412-FPH	F	●	●	●	12.7	4.76	1.2	5.16
WNMG080402-FP	F	★	★	★	12.7	4.76	0.2	5.16
WNMG080404-FP	F	★	★	★	12.7	4.76	0.4	5.16
WNMG080408-FP	F	★	★	★	12.7	4.76	0.8	5.16
WNMG080412-FP	F	★	★	★	12.7	4.76	1.2	5.16
WNMG080404-FH	F	★	★		12.7	4.76	0.4	5.16
WNMG080408-FH	F	★	★		12.7	4.76	0.8	5.16
WNMG080404-FS	F		★	★	12.7	4.76	0.4	5.16
WNMG080408-FS	F		★	★	12.7	4.76	0.8	5.16
WNMG080408-FY	F	★	★	★	12.7	4.76	0.8	5.16
WNMG06T304-LP	L	★	★	●	9.525	3.97	0.4	3.81
WNMG06T308-LP	L	●	★	●	9.525	3.97	0.8	3.81
WNMG060404-LP	L	●	●	●	9.525	4.76	0.4	3.81
WNMG060408-LP	L	●	●	●	9.525	4.76	0.8	3.81
WNMG080404-LP	L	●	●	★	12.7	4.76	0.4	5.16
WNMG080408-LP	L	●	●	★	12.7	4.76	0.8	5.16
WNMG080412-LP	L	●	●	★	12.7	4.76	1.2	5.16
WNMG06T304-SH	L	●	●		9.525	3.97	0.4	3.81
WNMG06T308-SH	L	●	●		9.525	3.97	0.8	3.81
WNMG060404-SH	L	★	●		9.525	4.76	0.4	3.81
WNMG060408-SH	L	●	★		9.525	4.76	0.8	3.81
WNMG080404-SH	L	●	●	★	12.7	4.76	0.4	5.16
WNMG080408-SH	L	●	●	★	12.7	4.76	0.8	5.16
WNMG080412-SH	L	●	●	★	12.7	4.76	1.2	5.16

1/3

(10 inserts in one case)

52 Vc

● / ★ = Expansion

● : Inventory maintained. ★ : Inventory maintained in Japan.

WNMG – NEGATIVE INSERTS (WITH HOLE)

Order number	F L M R H	MC6115	MC6125	MC6135	IC	S	RE	D1
WNMG080404-SA	L	●	●	★	12.7	4.76	0.4	5.16
WNMG080408-SA	L	●	●	★	12.7	4.76	0.8	5.16
WNMG080412-SA	L	●	●	●	12.7	4.76	1.2	5.16
WNMG060404-SW	L	●	★		9.525	4.76	0.4	3.81
WNMG060408-SW	L	●	●		9.525	4.76	0.8	3.81
WNMG080404-SW	L	●	★		12.7	4.76	0.4	5.16
WNMG080408-SW	L	●	★		12.7	4.76	0.8	5.16
WNMG080412-SW	L	●	★		12.7	4.76	1.2	5.16
WNMG080408-SY	L	●	●	★	12.7	4.76	0.8	5.16
WNMG06T304-MP	M	●	●	●	9.525	3.97	0.4	3.81
WNMG06T308-MP	M	●	●	●	9.525	3.97	0.8	3.81
WNMG06T312-MP	M	●	●	●	9.525	3.97	1.2	3.81
WNMG060404-MP	M	●	●	●	9.525	4.76	0.4	3.81
WNMG060408-MP	M	●	●	●	9.525	4.76	0.8	3.81
WNMG060412-MP	M	●	●	●	9.525	4.76	1.2	3.81
WNMG080404-MP	M	●	●	★	12.7	4.76	0.4	5.16
WNMG080408-MP	M	●	●	●	12.7	4.76	0.8	5.16
WNMG080412-MP	M	●	●	★	12.7	4.76	1.2	5.16
WNMG080416-MP	M	●	●	★	12.7	4.76	1.6	5.16
WNMG06T304-MS	M	★	●		9.525	3.97	0.4	3.81
WNMG06T308-MS	M	★	★		9.525	3.97	0.8	3.81
WNMG060404-MS	M	★	★		9.525	4.76	0.4	3.81
WNMG060408-MS	M	★	★		9.525	4.76	0.8	3.81
WNMG080404-MS	M	★	★	★	12.7	4.76	0.4	5.16
WNMG080408-MS	M	★	★	★	12.7	4.76	0.8	5.16
WNMG080412-MS	M	★	★		12.7	4.76	1.2	5.16
WNMG06T304-MA	M	★	●		9.525	3.97	0.4	3.81
WNMG06T308-MA	M	★	●		9.525	3.97	0.8	3.81
WNMG06T312-MA	M	★	★		9.525	3.97	1.2	3.81
WNMG060404-MA	M	●	●	★	9.525	4.76	0.4	3.81
WNMG060408-MA	M	●	●	★	9.525	4.76	0.8	3.81
WNMG060412-MA	M	★	●	★	9.525	4.76	1.2	3.81
WNMG080404-MA	M	●	●	★	12.7	4.76	0.4	5.16
WNMG080408-MA	M	●	●	●	12.7	4.76	0.8	5.16
WNMG080412-MA	M	●	●	★	12.7	4.76	1.2	5.16
WNMG080416-MA	M	●	●		12.7	4.76	1.6	5.16
WNMG100612-MA	M		★	★	15.875	6.35	1.2	6.35
WNMG080404-MH	M	★	●	★	12.7	4.76	0.4	5.16
WNMG080408-MH	M	●	●	★	12.7	4.76	0.8	5.16
WNMG080412-MH	M	●	●	★	12.7	4.76	1.2	5.16
WNMG080404	M	●	●	★	12.7	4.76	0.4	5.16
WNMG080408	M	●	●	★	12.7	4.76	0.8	5.16
WNMG080412	M	●	●	★	12.7	4.76	1.2	5.16
WNMG060408-MW	M	●	●	★	9.525	4.76	0.8	3.81
WNMG060412-MW	M	●	●	★	9.525	4.76	1.2	3.81
WNMG080408-MW	M	●	●	★	12.7	4.76	0.8	5.16
WNMG080412-MW	M	●	●	★	12.7	4.76	1.2	5.16

(10 inserts in one case)

● : Inventory maintained. ★ : Inventory maintained in Japan.

WNMG – NEGATIVE INSERTS (WITH HOLE)

Order number	F L M R H	MC6115	MC6125	MC6135	IC	S	RE	D1
WNMG080408-RP	R	●	●	●	12.7	4.76	0.8	5.16
WNMG080412-RP	R	●	●	●	12.7	4.76	1.2	5.16
WNMG080416-RP	R	●	●		12.7	4.76	1.6	5.16
WNMG080408-GH	R	★	●	★	12.7	4.76	0.8	5.16
WNMG080412-GH	R	★	●	★	12.7	4.76	1.2	5.16

3/3

(10 inserts in one case)

52 Vc

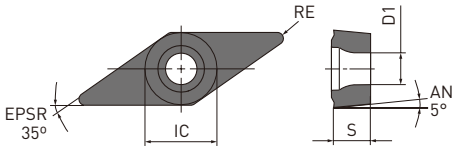
● : Inventory maintained. ★ : Inventory maintained in Japan.

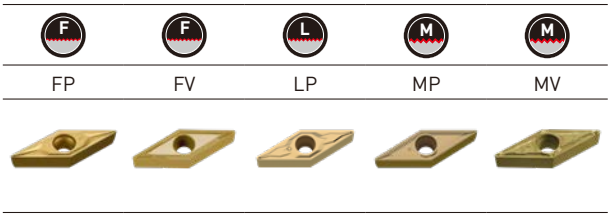
VBMT

5° POSITIVE INSERTS (WITH HOLE)

M Class

VBMT





Order number	F L M R H	MC6115	MC6125	MC6135	IC	S	RE	D1
VBMT110302-FP	F	●	●	★	6.35	3.18	0.2	2.9
VBMT110304-FP	F	●	●	★	6.35	3.18	0.4	2.9
VBMT110308-FP	F	●	★	★	6.35	3.18	0.8	2.9
VBMT160404-FP	F	●	●	★	9.525	4.76	0.4	4.4
VBMT160408-FP	F	●	●	★	9.525	4.76	0.8	4.4
VBMT160412-FP	F	●	●	●	9.525	4.76	1.2	4.4
VBMT110304-FV	F	●	●	★	6.35	3.18	0.4	2.9
VBMT110308-FV	F		●	★	6.35	3.18	0.8	2.9
VBMT160404-FV	F	●	●	★	9.525	4.76	0.4	4.4
VBMT160408-FV	F	●	●	★	9.525	4.76	0.8	4.4
VBMT110304-LP	L	●	●	★	6.35	3.18	0.4	2.9
VBMT110308-LP	L	●	●	★	6.35	3.18	0.8	2.9
VBMT160404-LP	L	●	●	★	9.525	4.76	0.4	4.4
VBMT160408-LP	L	●	●	★	9.525	4.76	0.8	4.4
VBMT160412-LP	L	●	●	●	9.525	4.76	1.2	4.4
VBMT160404-MP	M	●	●	★	9.525	4.76	0.4	4.4
VBMT160408-MP	M	●	●	★	9.525	4.76	0.8	4.4
VBMT110304-MV	M		●	★	6.35	3.18	0.4	2.9
VBMT110308-MV	M		●	★	6.35	3.18	0.8	2.9
VBMT160404-MV	M		●	★	9.525	4.76	0.4	4.4
VBMT160408-MV	M		★	★	9.525	4.76	0.8	4.4

(10 inserts in one case)

55 Vc

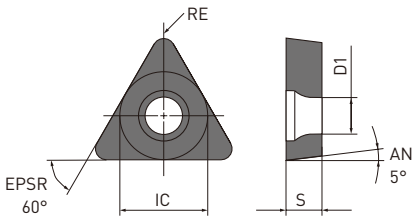
● : Inventory maintained. ★ : Inventory maintained in Japan.

TBMT, WBMT


5° POSITIVE INSERTS (WITH HOLE)

M Class

TBMT



WBMT

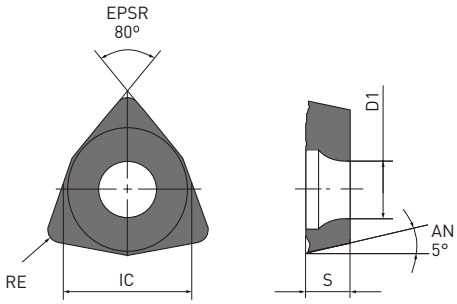



FV





MV



Order number	F L M R H	MC6115	MC6125	MC6135	IC	S	RE	D1
TBMT060102-FV	F	●		●	3.97	1.59	0.2	2.3
TBMT060104-FV	F	●		●	3.97	1.59	0.4	2.3
WBMTL30202R-MV	M		●	★	4.76	2.38	0.2	2.3
WBMTL30202L-MV	M		★	★	4.76	2.38	0.2	2.3
WBMTL30204R-MV	M		★	★	4.76	2.38	0.4	2.3
WBMTL30204L-MV	M		★	★	4.76	2.38	0.4	2.3

1/1

(10 inserts in one case)

55 Vc

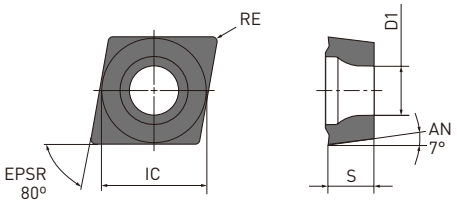
● : Inventory maintained. ★ : Inventory maintained in Japan.

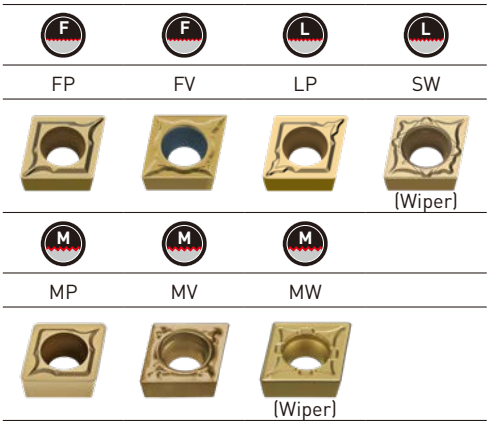
CCMT, CCMH

7° POSITIVE INSERTS (WITH HOLE)

M Class

CCMT, CCMH





Order number	F L M R H	MC6115	MC6125	MC6135	IC	S	RE	D1
CCMT060202-FP	F	●	●	★	6.35	2.38	0.2	2.8
CCMT060204-FP	F	●	●	★	6.35	2.38	0.4	2.8
CCMT09T302-FP	F	●	●	★	9.525	3.97	0.2	4.4
CCMT09T304-FP	F	●	●	★	9.525	3.97	0.4	4.4
CCMT09T308-FP	F	●	●	★	9.525	3.97	0.8	4.4
CCMT060202-FV	F		●	★	6.35	2.38	0.2	2.8
CCMT060204-FV	F		●	★	6.35	2.38	0.4	2.8
CCMT09T302-FV	F		●	★	9.525	3.97	0.2	4.4
CCMT09T304-FV	F		●	★	9.525	3.97	0.4	4.4
CCMT09T308-FV	F		●	★	9.525	3.97	0.8	4.4
CCMT060202-LP	L	●	●	★	6.35	2.38	0.2	2.8
CCMT060204-LP	L	●	●	★	6.35	2.38	0.4	2.8
CCMT060208-LP	L	●	●	★	6.35	2.38	0.8	2.8
CCMT09T302-LP	L	●	●	●	9.525	3.97	0.2	4.4
CCMT09T304-LP	L	●	●	★	9.525	3.97	0.4	4.4
CCMT09T308-LP	L	●	●	★	9.525	3.97	0.8	4.4
CCMT060202-SW	L	●	●	★	6.35	2.38	0.2	2.8
CCMT060204-SW	L	●	●	★	6.35	2.38	0.4	2.8
CCMT060208-SW	L	●	●	●	6.35	2.38	0.8	2.8
CCMT09T302-SW	L	●	●	★	9.525	3.97	0.2	4.4
CCMT09T304-SW	L	●	●	★	9.525	3.97	0.4	4.4
CCMT09T308-SW	L	●	●	●	9.525	3.97	0.8	4.4

1/2

(10 inserts in one case)

55 Vc

● : Inventory maintained. ★ : Inventory maintained in Japan.

CCMT, CCMH – 7° POSITIVE INSERTS (WITH HOLE)

Order number	F L M R H	MC6115	MC6125	MC6135	IC	S	RE	D1
CCMT060202-MP	M	●	●	★	6.35	2.38	0.2	2.8
CCMT060204-MP	M	●	●	★	6.35	2.38	0.4	2.8
CCMT060208-MP	M	●	●	★	6.35	2.38	0.8	2.8
CCMT080302-MP	M	★	★		7.94	3.18	0.2	3.4
CCMT080304-MP	M	●	★		7.94	3.18	0.4	3.4
CCMT080308-MP	M	●	★		7.94	3.18	0.8	3.4
CCMT09T302-MP	M	●	●	★	9.525	3.97	0.2	4.4
CCMT09T304-MP	M	●	●	★	9.525	3.97	0.4	4.4
CCMT09T308-MP	M	●	●	★	9.525	3.97	0.8	4.4
CCMT120404-MP	M	●	●	★	12.7	4.76	0.4	5.5
CCMT120408-MP	M	●	●	★	12.7	4.76	0.8	5.5
CCMT120412-MP	M	●	●	★	12.7	4.76	1.2	5.5
CCMH060202-MV	M		●	★	6.35	2.38	0.2	2.8
CCMH060204-MV	M		●	★	6.35	2.38	0.4	2.8
CCMT060204-MW	M	●	●	★	6.35	2.38	0.4	2.8
CCMT060208-MW	M	●	●	★	6.35	2.38	0.8	2.8
CCMT09T304-MW	M	●	●	★	9.525	3.97	0.4	4.4
CCMT09T308-MW	M	●	●	★	9.525	3.97	0.8	4.4
CCMT120404-MW	M	●	●	★	12.7	4.76	0.4	5.5
CCMT120408-MW	M	●	●	★	12.7	4.76	0.8	5.5

2/2

(10 inserts in one case)

55 Vc

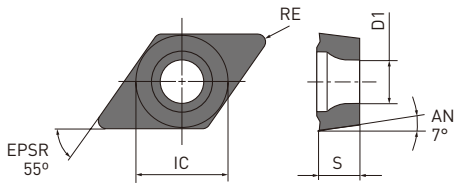
● : Inventory maintained. ★ : Inventory maintained in Japan.

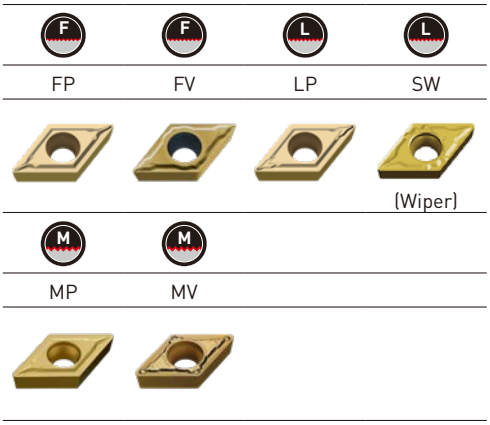
DCMT, DCMX

7° POSITIVE INSERTS (WITH HOLE)

M Class

DCMT, DCMX





Order number	F L M R H	MC6115	MC6125	MC6135	IC	S	RE	D1
DCMT070202-FP	F	●	●	★	6.35	2.38	0.2	2.8
DCMT070204-FP	F	●	●	★	6.35	2.38	0.4	2.8
DCMT11T302-FP	F	●	●	★	9.525	3.97	0.2	4.4
DCMT11T304-FP	F	●	●	★	9.525	3.97	0.4	4.4
DCMT11T308-FP	F	●	●	★	9.525	3.97	0.8	4.4
DCMT070202-FV	F	●	●	★	6.35	2.38	0.2	2.8
DCMT070204-FV	F	●	●	★	6.35	2.38	0.4	2.8
DCMT070208-FV	F		●	★	6.35	2.38	0.8	2.8
DCMT11T302-FV	F		●	★	9.525	3.97	0.2	4.4
DCMT11T304-FV	F	●	●	★	9.525	3.97	0.4	4.4
DCMT11T308-FV	F	●	●	★	9.525	3.97	0.8	4.4
DCMT070202-LP	L	●	●	★	6.35	2.38	0.2	2.8
DCMT070204-LP	L	●	●	★	6.35	2.38	0.4	2.8
DCMT070208-LP	L	●	●	★	6.35	2.38	0.8	2.8
DCMT11T302-LP	L	●	●	★	9.525	3.97	0.2	4.4
DCMT11T304-LP	L	●	●	★	9.525	3.97	0.4	4.4
DCMT11T308-LP	L	●	●	★	9.525	3.97	0.8	4.4
DCMX070202-SW	L	●	●	●	6.35	2.38	0.2	2.8
DCMX070204-SW	L	●	●	●	6.35	2.38	0.4	2.8
DCMX070208-SW	L	●	●	●	6.35	2.38	0.8	2.8
DCMX11T302-SW	L	●	●	●	9.525	3.97	0.2	4.4
DCMX11T304-SW	L	●	●	●	9.525	3.97	0.4	4.4
DCMX11T308-SW	L	●	●	●	9.525	3.97	0.8	4.4

1/2

(10 inserts in one case)

55 Vc

● : Inventory maintained. ★ : Inventory maintained in Japan.

DCMT, DCMX – 7° POSITIVE INSERTS (WITH HOLE)

Order number	F L M R H	MC6115	MC6125	MC6135	IC	S	RE	D1
DCMT070202-MP	M	●	●	★	6.35	2.38	0.2	2.8
DCMT070204-MP	M	●	●	★	6.35	2.38	0.4	2.8
DCMT070208-MP	M	●	●	★	6.35	2.38	0.8	2.8
DCMT11T302-MP	M	●	●	★	9.525	3.97	0.2	4.4
DCMT11T304-MP	M	●	●	★	9.525	3.97	0.4	4.4
DCMT11T308-MP	M	●	●	★	9.525	3.97	0.8	4.4
DCMT11T312-MP	M	●	●		9.525	3.97	1.2	4.4
DCMT150404-MP	M	●	●	★	12.7	4.76	0.4	5.5
DCMT150408-MP	M	●	●	★	12.7	4.76	0.8	5.5
DCMT150412-MP	M	●	●		12.7	4.76	1.2	5.5
DCMT070202-MV	M	●	●	★	6.35	2.38	0.2	2.8
DCMT070204-MV	M	●	●	★	6.35	2.38	0.4	2.8
DCMT070208-MV	M	●	●	★	6.35	2.38	0.8	2.8
DCMT11T302-MV	M	●	●	★	9.525	3.97	0.2	4.4
DCMT11T304-MV	M	●	●	★	9.525	3.97	0.4	4.4
DCMT11T308-MV	M	●	★	★	9.525	3.97	0.8	4.4

(10 inserts in one case)

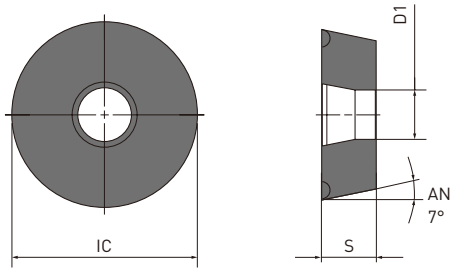
● : Inventory maintained. ★ : Inventory maintained in Japan.

RCMT, RCMX, SCMT


7° POSITIVE INSERTS (WITH HOLE)


M Class

RCMT, RCMX



SCMT

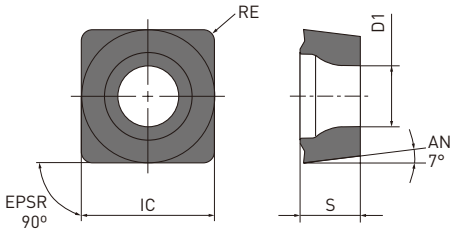

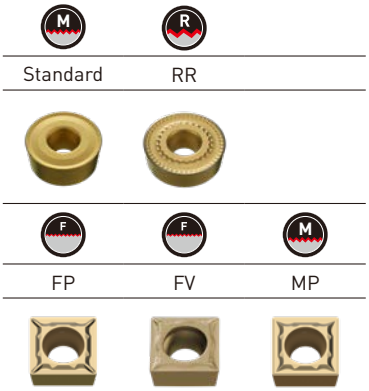

Order number	F L M R H	MC6115	MC6125	MC6135	IC	S	RE	D1
RCMT0602M0	M	●	●		6	2.38	—	2.8
RCMT0803M0	M	●	●		8	3.18	—	3.4
RCMX1003M0	M	●	●	★	10	3.18	—	3.6
RCMX1204M0	M	★	●	★	12	4.76	—	4.2
RCMX1606M0	M	★	●	★	16	6.35	—	5.2
RCMX2006M0	M	●	●	●	20	6.35	—	6.5
RCMX2507M0	M	★	●	★	25	7.94	—	7.2
RCMX3209M0	M	★	★	★	32	9.52	—	9.5
RCMX1606M0-RR	R	★	●	●	16	6.35	—	5.2
RCMX2006M0-RR	R	●	★	●	20	6.35	—	6.5
RCMX2507M0-RR	R	★	●	●	25	7.94	—	7.2
RCMX3209M0-RR	R	★	★	★	32	9.52	—	9.5
SCMT09T304-FP	F	●	●	★	9.525	3.97	0.4	4.4
SCMT09T308-FP	F	●	●	★	9.525	3.97	0.8	4.4
SCMT09T304-FV	F		●	★	9.525	3.97	0.4	4.4
SCMT09T304-LP	L	●	●	★	9.525	3.97	0.4	4.4
SCMT09T308-LP	L	●	●	★	9.525	3.97	0.8	4.4
SCMT09T304-MP	M	●	●	★	9.525	3.97	0.4	4.4
SCMT09T308-MP	M	●	●	★	9.525	3.97	0.8	4.4
SCMT120404-MP	M	●	●	★	12.7	4.76	0.4	5.5
SCMT120408-MP	M	●	●	★	12.7	4.76	0.8	5.5
SCMT120412-MP	M	●	★		12.7	4.76	1.2	5.5

(10 inserts in one case)

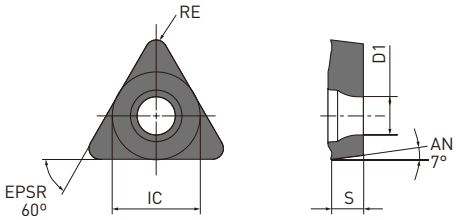
● : Inventory maintained. ★ : Inventory maintained in Japan.

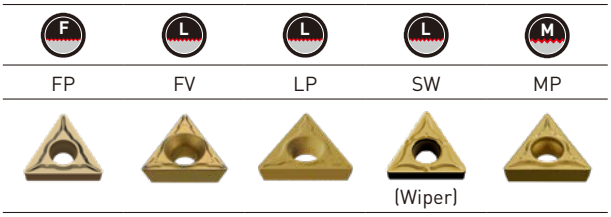
TCMT, TCMX

7° POSITIVE INSERTS (WITH HOLE)

M Class

TCMT, TCMX





Order number	F L M R H	MC6115	MC6125	MC6135	IC	S	RE	D1
TCMT090202-FP	F	●	★	★	5.56	2.38	0.2	2.5
TCMT090204-FP	F	●	●	★	5.56	2.38	0.4	2.5
TCMT110202-FP	F	●	★	★	6.35	2.38	0.2	2.8
TCMT110204-FP	F	●	●	★	6.35	2.38	0.4	2.8
TCMT16T304-FP	F	●	●	★	9.525	3.97	0.4	4.4
TCMT110204-FV	F		●	★	6.35	2.38	0.4	2.8
TCMT16T304-FV	F		●	★	9.525	3.97	0.4	4.4
TCMT090204-LP	L	●	●	★	5.56	2.38	0.4	2.5
TCMT090208-LP	L	●	★	★	5.56	2.38	0.8	2.5
TCMT110202-LP	L	●	●	●	6.35	2.38	0.2	2.8
TCMT110204-LP	L	●	●	★	6.35	2.38	0.4	2.8
TCMT110208-LP	L	●	●	★	6.35	2.38	0.8	2.8
TCMT16T304-LP	L	●	●	★	9.525	3.97	0.4	4.4
TCMT16T308-LP	L	●	●	★	9.525	3.97	0.8	4.4
TCMX090204-SW	L	●	●	●	5.56	2.38	0.4	2.5
TCMX110204-SW	L	●	●	●	6.35	2.38	0.4	2.8
TCMT090204-MP	M	●	★	★	5.56	2.38	0.4	2.5
TCMT090208-MP	M	●	★	★	5.56	2.38	0.8	2.5
TCMT110202-MP	M	●	●	★	6.35	2.38	0.2	2.8
TCMT110204-MP	M	●	★	★	6.35	2.38	0.4	2.8
TCMT110208-MP	M	●	★	★	6.35	2.38	0.8	2.8
TCMT130304-MP	M	●	●	★	7.94	3.18	0.4	3.4
TCMT16T304-MP	M	●	●	★	9.525	3.97	0.4	4.4
TCMT16T308-MP	M	●	●	★	9.525	3.97	0.8	4.4
TCMT16T312-MP	M	●	●	★	9.525	3.97	1.2	4.4

(10 inserts in one case)

55 Vc

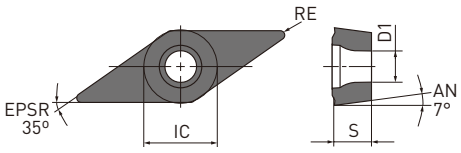
● : Inventory maintained. ★ : Inventory maintained in Japan.

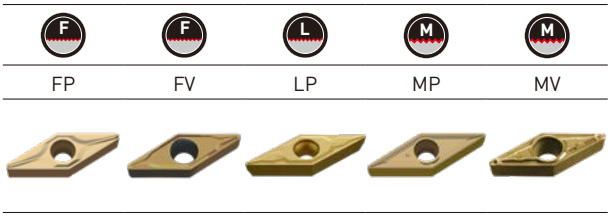
VCMT

7° POSITIVE INSERTS (WITH HOLE)

M Class

VCMT





Order number	F L M R H	MC6115	MC6125	MC6135	IC	S	RE	D1
VCMT080202-FP	F	●	●	●	4.76	2.38	0.2	2.4
VCMT080204-FP	F	●	●	●	4.76	2.38	0.4	2.4
VCMT110302-FP	F	●	●	★	6.35	3.18	0.2	2.8
VCMT110304-FP	F	●	●	★	6.35	3.18	0.4	2.8
VCMT160404-FP	F	●	●	★	9.525	4.76	0.4	4.4
VCMT160408-FP	F	●	●	★	9.525	4.76	0.8	4.4
VCMT080202-FV	F		●	★	4.76	2.38	0.2	2.4
VCMT080204-FV	F		●	★	4.76	2.38	0.4	2.4
VCMT160404-FV	F	●	●	★	9.525	4.76	0.4	4.4
VCMT160408-FV	F	●	●	★	9.525	4.76	0.8	4.4
VCMT080202-LP	L	●	★	★	4.76	2.38	0.2	2.4
VCMT080204-LP	L	●	●	★	4.76	2.38	0.4	2.4
VCMT110304-LP	L	●	●	★	6.35	3.18	0.4	2.8
VCMT110308-LP	L	●	●	★	6.35	3.18	0.8	2.8
VCMT160404-LP	L	●	●	★	9.525	4.76	0.4	4.4
VCMT160408-LP	L	●	●	★	9.525	4.76	0.8	4.4
VCMT110304-MP	M	●	●	★	6.35	3.18	0.4	2.8
VCMT160404-MP	M	●	●	★	9.525	4.76	0.4	4.4
VCMT160408-MP	M	●	●	★	9.525	4.76	0.8	4.4
VCMT160412-MP	M	●	★	★	9.525	4.76	1.2	4.4
VCMT080202-MV	M		★	★	4.76	2.38	0.2	2.4
VCMT080204-MV	M		●	★	4.76	2.38	0.4	2.4

(10 inserts in one case)

55 Vc

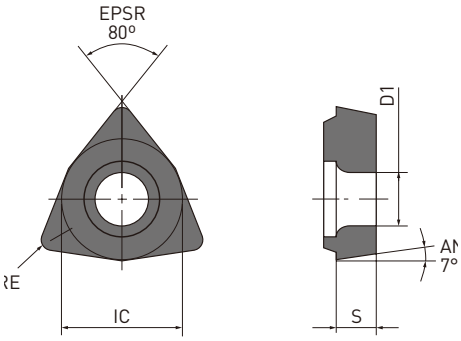
● : Inventory maintained. ★ : Inventory maintained in Japan.

WCMT, XCMT

7° POSITIVE INSERTS (WITH HOLE)


M Class

WCMT





XCMT

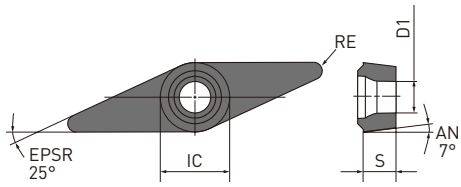

Order number	F L M R H	MC6115	MC6125	MC6135	IC	S	RE	D1
WCMT020102-FV	F		●		3.97	1.59	0.2	2.3
WCMT020104-FV	F		●		3.97	1.59	0.4	2.3
WCMTL30202-FV	F		●		4.76	2.38	0.2	2.3
WCMTL30204-FV	F		●		4.76	2.38	0.4	2.3
WCMT040202-FV	F		●		6.35	2.38	0.2	2.8
WCMT040204-FV	F		●		6.35	2.38	0.4	2.8
WCMT06T302-FV	F		●		9.525	3.97	0.2	4.4
WCMT06T304-FV	F		●		9.525	3.97	0.4	4.4
WCMT020102-MP	M	★	★	★	3.97	1.59	0.2	2.3
WCMT020104-MP	M	★	★	★	3.97	1.59	0.4	2.3
WCMTL30202-MP	M	★	★		4.76	2.38	0.2	2.3
WCMTL30204-MP	M	★	★		4.76	2.38	0.4	2.3
WCMT040202-MP	M	★	★	★	6.35	2.38	0.2	2.8
WCMT040204-MP	M	★	★	★	6.35	2.38	0.4	2.8
WCMT040208-MP	M		★	★	6.35	2.38	0.8	2.8
WCMT06T304-MP	M	★	★	★	9.525	3.97	0.4	4.4
WCMT06T308-MP	M	★	★	★	9.525	3.97	0.8	4.4
XCMT150304-SVX	F		●	★	6.35	3.18	0.4	2.85
XCMT150308-SVX	F		●	★	6.35	3.18	0.8	2.85

(10 inserts in one case)

55 Vc

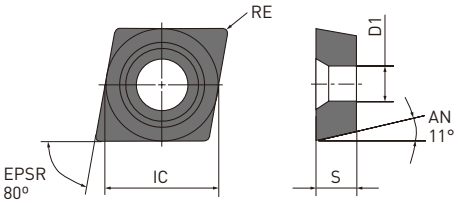
● : Inventory maintained. ★ : Inventory maintained in Japan.

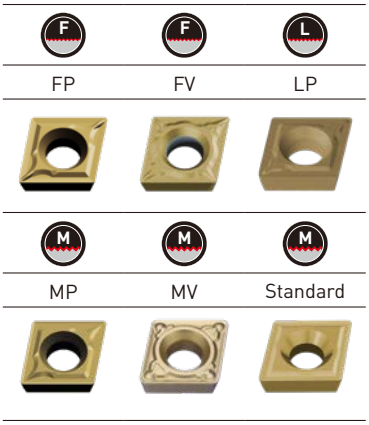
CPMH

11° POSITIVE INSERTS (WITH HOLE)

M Class

CPMH





Order number	F L M R H	MC6115	MC6125	MC6135	IC	S	RE	D1
CPMH080202-FP	F		●	●	7.94	2.38	0.2	3.5
CPMH080204-FP	F		●	●	7.94	2.38	0.4	3.5
CPMH090302-FP	F		●	●	9.525	3.18	0.2	4.5
CPMH090304-FP	F		●	●	9.525	3.18	0.4	4.5
CPMH090308-FP	F		●	●	9.525	3.18	0.8	4.5
CPMH080202-FV	F		★	★	7.94	2.38	0.2	3.5
CPMH080204-FV	F		●	★	7.94	2.38	0.4	3.5
CPMH090302-FV	F		★	★	9.525	3.18	0.2	4.5
CPMH090304-FV	F		●	★	9.525	3.18	0.4	4.5
CPMH090308-FV	F		●	★	9.525	3.18	0.8	4.5
CPMH080202-LP	L		●	★	7.94	2.38	0.2	3.5
CPMH080204-LP	L	●	●	★	7.94	2.38	0.4	3.5
CPMH080208-LP	L	●	●	●	7.94	2.38	0.8	3.5
CPMH090302-LP	L		●	★	9.525	3.18	0.2	4.5
CPMH090304-LP	L	●	★	★	9.525	3.18	0.4	4.5
CPMH090308-LP	L	●	★	★	9.525	3.18	0.8	4.5
CPMH080204-MP	M	●	●	●	7.94	2.38	0.4	3.5
CPMH080208-MP	M	●	●	●	7.94	2.38	0.8	3.5
CPMH090304-MP	M	●	●	●	9.525	3.18	0.4	4.5
CPMH090308-MP	M	●	●	●	9.525	3.18	0.8	4.5
CPMH080204-MV	M		●	★	7.94	2.38	0.4	3.5
CPMH080208-MV	M		●	★	7.94	2.38	0.8	3.5
CPMH090304-MV	M		●	★	9.525	3.18	0.4	4.5
CPMH090308-MV	M		●	★	9.525	3.18	0.8	4.5
CPMH080204	M	★	●		7.94	2.38	0.4	3.5
CPMH080208	M	★	●		7.94	2.38	0.8	3.5
CPMH090304	M	★	●		9.525	3.18	0.4	4.5
CPMH090308	M	★	●	★	9.525	3.18	0.8	4.5

(10 inserts in one case)

57 Vc

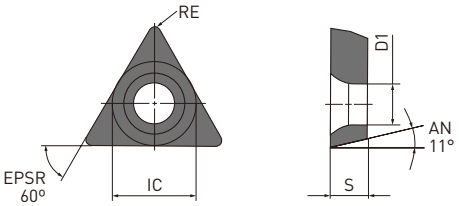
● : Inventory maintained. ★ : Inventory maintained in Japan.

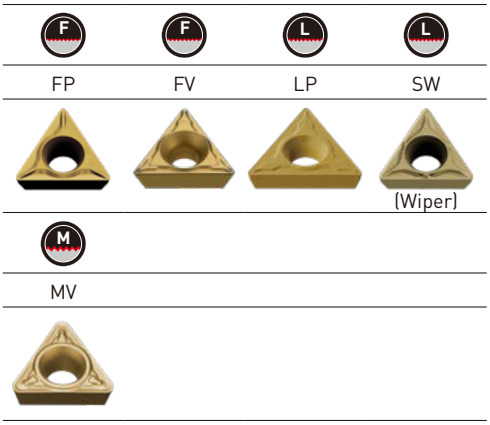
TPMH, TPMX

11° POSITIVE INSERTS (WITH HOLE)

M Class

TPMH, TPMX





Order number	F L M R H	MC6115	MC6125	MC6135	IC	S	RE	D1
TPMH090202-FP	F	●	●	●	5.56	2.38	0.2	2.9
TPMH090204-FP	F	●	●	●	5.56	2.38	0.4	2.9
TPMH110302-FP	F	●	●	●	6.35	3.18	0.2	3.4
TPMH110304-FP	F	●	●	●	6.35	3.18	0.4	3.4
TPMH110308-FP	F	●	●	●	6.35	3.18	0.8	3.4
TPMH080202-FV	F		★	★	4.76	2.38	0.2	2.4
TPMH080204-FV	F		★	★	4.76	2.38	0.4	2.4
TPMH090202-FV	F		★	★	5.56	2.38	0.2	2.9
TPMH090204-FV	F		●	★	5.56	2.38	0.4	2.9
TPMH110302-FV	F		★	★	6.35	3.18	0.2	3.4
TPMH110304-FV	F	●	●	★	6.35	3.18	0.4	3.4
TPMH110308-FV	F	●	●	★	6.35	3.18	0.8	3.4
TPMH160302-FV	F		●	★	9.525	3.18	0.2	4.4
TPMH160304-FV	F	●	★	★	9.525	3.18	0.4	4.4
TPMH160308-FV	F		●	★	9.525	3.18	0.8	4.4
TPMH080202-LP	L		●	★	4.76	2.38	0.2	2.4
TPMH080204-LP	L		●	★	4.76	2.38	0.4	2.4
TPMH090202-LP	L	●	★	★	5.56	2.38	0.2	2.9
TPMH090204-LP	L	●	●	★	5.56	2.38	0.4	2.9
TPMH110302-LP	L	●	★	★	6.35	3.18	0.2	3.4
TPMH110304-LP	L	●	●	★	6.35	3.18	0.4	3.4
TPMH110308-LP	L	●	★	★	6.35	3.18	0.8	3.4
TPMH160302-LP	L	●	★	★	9.525	3.18	0.2	4.4
TPMH160304-LP	L	●	★	★	9.525	3.18	0.4	4.4
TPMH160308-LP	L	●	★	★	9.525	3.18	0.8	4.4
TPMX090202-SW	L	●	●	●	5.56	2.38	0.2	2.9
TPMX090204-SW	L	●	●	●	5.56	2.38	0.4	2.9
TPMX090208-SW	L	●	●	●	5.56	2.38	0.8	2.9
TPMX110302-SW	L	●	●	●	6.35	3.18	0.2	3.4
TPMX110304-SW	L	●	●	●	6.35	3.18	0.4	3.4
TPMX110308-SW	L	●	●	●	6.35	3.18	0.8	3.4

1/2

(10 inserts in one case)

57 Vc

● : Inventory maintained. ★ : Inventory maintained in Japan.

TPMH, TPMX – 11° POSITIVE INSERTS (WITH HOLE)

Order number	F L M R H	MC6115	MC6125	MC6135	IC	S	RE	D1
TPMH080202-MV	M		●	★	4.76	2.38	0.2	2.4
TPMH080204-MV	M		●	★	4.76	2.38	0.4	2.4
TPMH090202-MV	M		●	★	5.56	2.38	0.2	2.9
TPMH090204-MV	M		●	★	5.56	2.38	0.4	2.9
TPMH090208-MV	M		●	★	5.56	2.38	0.8	2.9
TPMH110302-MV	M		●	★	6.35	3.18	0.2	3.4
TPMH110304-MV	M		●	★	6.35	3.18	0.4	3.4
TPMH110308-MV	M		●	★	6.35	3.18	0.8	3.4
TPMH160304-MV	M		●	★	9.525	3.18	0.4	4.4
TPMH160308-MV	M		★	★	9.525	3.18	0.8	4.4

(10 inserts in one case)

57 Vc

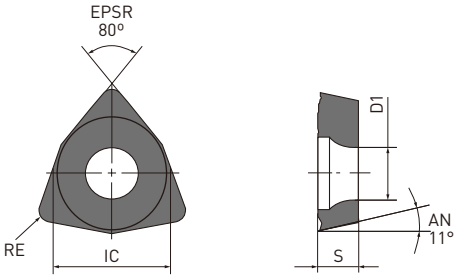
● : Inventory maintained. ★ : Inventory maintained in Japan.

WPMT

11° POSITIVE INSERTS (WITH HOLE)

M Class

WPMT



MV



Order number	F L M R H	MC6115	MC6125	MC6135	IC	S	RE	D1
WPMT040202-MV	M		●	★	6.35	2.38	0.2	2.8
WPMT040204-MV	M		★	★	6.35	2.38	0.4	2.8
WPMT060304-MV	M		★	★	9.525	3.18	0.4	4.4
WPMT060308-MV	M		●	★	9.525	3.18	0.8	4.4

1/1

(10 inserts in one case)

57 Vc

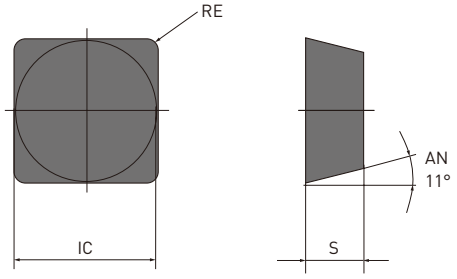
● : Inventory maintained. ★ : Inventory maintained in Japan.


SPMR, SPMN

11° POSITIVE INSERTS (WITHOUT HOLE)

M Class

SPMR, SPMN





Order number	F L M R H	MC6115	MC6125	MC6135	IC	S	RE	D1
SPMR090304	M	★	★	★	9.525	3.18	0.4	—
SPMR090308	M	●	★	★	9.525	3.18	0.8	—
SPMR120304	M	●	★	★	12.7	3.18	0.4	—
SPMR120308	M	●	★	★	12.7	3.18	0.8	—
SPMN090308	—	★			9.525	3.18	0.8	—
SPMN120304	—	★			12.7	3.18	0.4	—
SPMN120308	—	●			12.7	3.18	0.8	—
SPMN120312	—	●		★	12.7	3.18	1.2	—

1/1

(10 inserts in one case)

57 Vc

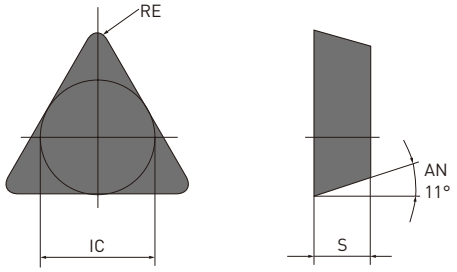
● : Inventory maintained. ★ : Inventory maintained in Japan.

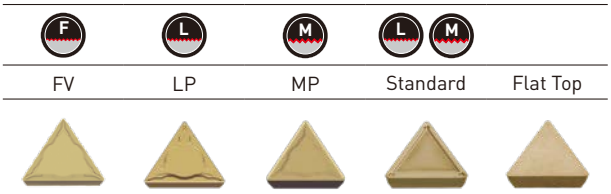
TPMR, TPMN

11° POSITIVE INSERTS (WITHOUT HOLE)

M Class

TPMR, TPMN





Order number	F L M R H	MC6115	MC6125	MC6135	IC	S	RE	D1
TPMR160304-FV	F		●	●	9.525	3.18	0.4	—
TPMR110304-LP	L		●	●	6.35	3.18	0.4	—
TPMR110308-LP	L		●	●	6.35	3.18	0.8	—
TPMR160304-LP	L	●	●	●	9.525	3.18	0.4	—
TPMR160308-LP	L	●	●	●	9.525	3.18	0.8	—
TPMR110304-MP	M	●	●	●	6.35	3.18	0.4	—
TPMR110308-MP	M	●	●	●	6.35	3.18	0.8	—
TPMR160304-MP	M	●	●	●	9.525	3.18	0.4	—
TPMR160308-MP	M	●	●	●	9.525	3.18	0.8	—
TPMR110304	M	●	★	★	6.35	3.18	0.4	—
TPMR110308	M	●	★	★	6.35	3.18	0.8	—
TPMR160304	M	●	★	★	9.525	3.18	0.4	—
TPMR160308	M	●	★	★	9.525	3.18	0.8	—
TPMR160312	M	●	★		9.525	3.18	1.2	—
TPMN110304	—	●			6.35	3.18	0.4	—
TPMN110308	—	★			6.35	3.18	0.8	—
TPMN160304	—	●			9.525	3.18	0.4	—
TPMN160308	—	●			9.525	3.18	0.8	—
TPMN160312	—	★			9.525	3.18	1.2	—
TPMN220404	—	★			12.7	4.76	0.4	—
TPMN220408	—	★		★	12.7	4.76	0.8	—
TPMN220412	—	★			12.7	4.76	1.2	—

1/1

(10 inserts in one case)

57 Vc

● : Inventory maintained. ★ : Inventory maintained in Japan.

MC6100 SERIES

RECOMMENDED CUTTING CONDITIONS

NEGATIVE INSERTS (FOR EXTERNAL TURNING)

	Material	Properties	Conditions	F L M R H	Priority	Grade		Vc	f	ap
P	Mild steel	≤180 HB	✣	F	1	MC6125	FY	385 – 605	0.09 – 0.23	0.20 – 0.80
			✣	F	2	MC6135	FY	315 – 480	0.09 – 0.23	0.20 – 0.80
			✣	L	1	MC6125	SY	350 – 550	0.16 – 0.33	0.50 – 1.20
			✣	L	2	MC6135	SY	290 – 435	0.16 – 0.33	0.50 – 1.20
	Carbon and alloy steel	180 – 280 HB	●	F	1	MC6115	FPH	275 – 525	0.20 – 0.50	0.10 – 1.00
			●	F	1	MC6115	FP	250 – 480	0.08 – 0.25	0.10 – 1.00
			●	F	2	MC6125	FP	275 – 425	0.08 – 0.25	0.10 – 1.00
			●	L	1	MC6115	LP	250 – 480	0.10 – 0.40	0.30 – 2.00
			●	L	2	MC6125	LP	275 – 425	0.10 – 0.40	0.30 – 2.00
			●	L	3	MC6115	SH	250 – 480	0.10 – 0.40	0.30 – 2.00
			●	L	4	MC6125	SH	275 – 425	0.10 – 0.40	0.30 – 2.00
			●	L	5	MC6115	SA	250 – 480	0.10 – 0.40	0.30 – 2.00
			●	L	6	MC6125	SA	275 – 425	0.10 – 0.40	0.30 – 2.00
			●	L	7	MC6115	SW	250 – 480	0.10 – 0.50	0.30 – 2.50
			●	L	8	MC6125	SW	275 – 425	0.10 – 0.50	0.30 – 2.50
			●	M	1	MC6115	MP	230 – 440	0.16 – 0.50	0.30 – 4.00
			●	M	2	MC6125	MP	250 – 390	0.16 – 0.50	0.30 – 4.00
			●	M	3	MC6115	MA	230 – 440	0.20 – 0.50	0.30 – 4.00
			●	M	4	MC6125	MA	250 – 390	0.20 – 0.50	0.30 – 4.00
			●	M	5	MC6115	Std	230 – 440	0.25 – 0.60	1.50 – 5.00
			●	M	6	MC6125	Std	250 – 390	0.25 – 0.60	1.50 – 5.00
			●	M	7	MC6115	MW	230 – 440	0.20 – 0.60	0.90 – 4.00
			●	M	8	MC6125	MW	250 – 390	0.20 – 0.60	0.90 – 4.00
			●	R	1	MC6115	RP	215 – 415	0.25 – 0.60	1.50 – 6.00
			●	R	2	MC6125	RP	235 – 370	0.25 – 0.60	1.50 – 6.00
			●	R	3	MC6115	GH	215 – 415	0.25 – 0.60	1.50 – 6.00
			●	R	4	MC6125	GH	235 – 370	0.25 – 0.60	1.50 – 6.00
			●	H	1	MC6125	HX	210 – 330	0.50 – 1.26	3.00 – 11.00
			●	H	2	MC6135	HX	170 – 260	0.50 – 1.26	3.00 – 11.00
			●	H	3	MC6125	HV	175 – 270	0.58 – 1.26	4.00 – 12.00
			●	H	4	MC6135	HV	140 – 215	0.58 – 1.26	4.00 – 12.00

1/3

1. Recommended cutting conditions for 5°/7°/11° positive inserts are provided as a guideline only.
   Verify the recommended conditions for each boring bar as cutting conditions for internal machining will vary depending on the length of overhang.

Cutting conditions: ●: Stable cutting ◔: General cutting ✣: Unstable cutting

MC6100 SERIES – NEGATIVE INSERTS (FOR EXTERNAL TURNING)

	Material	Properties	Conditions	F L M R H	Priority	Grade		Vc	f	ap
P	Carbon and alloy steel	180 – 280 HB	●	F	1	MC6125	FPH	300 – 465	0.20 – 0.50	0.10 – 1.00
			●	F	1	MC6115	FP	250 – 480	0.08 – 0.25	0.10 – 1.00
			●	F	2	MC6125	FP	275 – 425	0.08 – 0.25	0.10 – 1.00
			●	L	1	MC6115	LP	250 – 480	0.10 – 0.40	0.30 – 2.00
			●	L	2	MC6125	LP	275 – 425	0.10 – 0.40	0.30 – 2.00
			●	L	3	MC6115	SH	250 – 480	0.10 – 0.40	0.30 – 2.00
			●	L	4	MC6125	SH	275 – 425	0.10 – 0.40	0.30 – 2.00
			●	L	5	MC6115	SA	250 – 480	0.10 – 0.40	0.30 – 2.00
			●	L	6	MC6125	SA	275 – 425	0.10 – 0.40	0.30 – 2.00
			●	L	7	MC6115	SW	250 – 480	0.10 – 0.50	0.30 – 2.50
			●	L	8	MC6125	SW	275 – 425	0.10 – 0.50	0.30 – 2.50
			●	M	1	MC6125	MP	250 – 390	0.16 – 0.50	0.30 – 4.00
			●	M	2	MC6135	MP	205 – 310	0.16 – 0.50	0.30 – 4.00
			●	M	3	MC6125	MA	250 – 390	0.20 – 0.50	0.30 – 4.00
			●	M	4	MC6135	MA	205 – 310	0.20 – 0.50	0.30 – 4.00
			●	M	5	MC6125	MH	250 – 390	0.20 – 0.55	1.00 – 4.00
			●	M	6	MC6135	MH	205 – 310	0.20 – 0.55	1.00 – 4.00
			●	M	7	MC6125	Std	250 – 390	0.25 – 0.60	1.50 – 5.00
			●	M	8	MC6135	Std	205 – 310	0.25 – 0.60	1.50 – 5.00
			●	M	9	MC6125	MW	250 – 390	0.20 – 0.60	0.90 – 4.00
			●	M	10	MC6135	MW	205 – 310	0.20 – 0.60	0.90 – 4.00
			●	R	1	MC6135	RP	190 – 290	0.25 – 0.60	1.50 – 6.00
			●	R	2	MC6125	RP	235 – 370	0.25 – 0.60	1.50 – 6.00
			●	R	3	MC6135	GH	190 – 290	0.25 – 0.60	1.50 – 6.00
			●	R	4	MC6125	GH	235 – 370	0.25 – 0.60	1.50 – 6.00
			●	H	1	MC6135	HX	170 – 260	0.50 – 1.26	3.00 – 11.00
			●	H	2	MC6125	HX	210 – 330	0.50 – 1.26	3.00 – 11.00
			●	H	3	MC6135	HV	140 – 215	0.58 – 1.26	4.00 – 12.00
			●	H	4	MC6125	HV	175 – 270	0.58 – 1.26	4.00 – 12.00

2/3

1. Recommended cutting conditions for 5°/7°/11° positive inserts are provided as a guideline only.
   Verify the recommended conditions for each boring bar as cutting conditions for internal machining will vary depending on the length of overhang.

Cutting conditions: ●: Stable cutting ◐: General cutting ✱: Unstable cutting

MC6100 SERIES – NEGATIVE INSERTS (FOR EXTERNAL TURNING)

	Material	Properties	Conditions	F L M R H	Priority	Grade		Vc	f	ap
P	Carbon and alloy steel	180 – 280 HB	●	F	1	MC6135	FP	245 – 370	0.08 – 0.25	0.10 – 1.00
			●	F	2	MC6125	FP	300 – 465	0.08 – 0.25	0.10 – 1.00
			●	F	3	MC6135	FPH	245 – 370	0.20 – 0.50	0.10 – 1.00
			●	L	1	MC6135	LP	225 – 340	0.10 – 0.40	0.30 – 2.00
			●	L	2	MC6125	LP	275 – 425	0.10 – 0.40	0.30 – 2.00
			●	L	3	MC6135	SH	225 – 340	0.10 – 0.40	0.30 – 2.00
			●	L	4	MC6125	SH	275 – 425	0.10 – 0.40	0.30 – 2.00
			●	L	5	MC6135	SA	225 – 340	0.10 – 0.40	0.30 – 2.00
			●	L	6	MC6125	SA	275 – 425	0.10 – 0.40	0.30 – 2.00
			●	M	1	MC6135	MP	205 – 310	0.16 – 0.50	0.30 – 4.00
			●	M	2	MC6125	MP	250 – 390	0.16 – 0.50	0.30 – 4.00
			●	M	3	MC6135	MA	205 – 310	0.20 – 0.50	0.30 – 4.00
			●	M	4	MC6125	MA	250 – 390	0.20 – 0.50	0.30 – 4.00
			●	M	5	MC6135	MH	205 – 310	0.20 – 0.55	1.00 – 4.00
			●	M	6	MC6125	MH	250 – 390	0.20 – 0.55	1.00 – 4.00
			●	M	7	MC6135	Std	205 – 310	0.25 – 0.60	1.50 – 5.00
			●	M	8	MC6125	Std	250 – 390	0.25 – 0.60	1.50 – 5.00
			●	M	9	MC6135	MW	205 – 310	0.20 – 0.60	0.90 – 4.00
			●	M	10	MC6125	MW	250 – 390	0.20 – 0.60	0.90 – 4.00
			●	R	1	MC6135	RP	190 – 290	0.25 – 0.60	1.50 – 6.00
			●	R	2	MC6125	RP	235 – 370	0.25 – 0.60	1.50 – 6.00
			●	R	3	MC6135	GH	190 – 290	0.25 – 0.60	1.50 – 6.00
			●	R	4	MC6125	GH	235 – 370	0.25 – 0.60	1.50 – 6.00
			●	H	1	MC6135	HX	170 – 260	0.50 – 1.26	3.00 – 11.00
			●	H	2	MC6125	HX	210 – 330	0.50 – 1.26	3.00 – 11.00

1. Recommended cutting conditions for 5°/7°/11° positive inserts are provided as a guideline only.
   Verify the recommended conditions for each boring bar as cutting conditions for internal machining will vary depending on the length of overhang.

Cutting conditions: ●: Stable cutting ◔: General cutting ✲: Unstable cutting

MC6100 SERIES – 5°, 7° POSITIVE INSERTS (FOR EXTERNAL TURNING)

	Material	Properties	Conditions	F L M R	Priority	Grade		Vc	f	ap
P	Mild steel	≤180 HB	●	F	1	MC6115	FP	295 – 570	0.04 – 0.20	0.20 – 0.90
			●	F	2	MC6115	FV	295 – 570	0.04 – 0.20	0.20 – 0.90
			●	L	1	MC6115	LP	295 – 570	0.06 – 0.25	0.20 – 1.00
			●	L	2	MC6115	SW	295 – 570	0.06 – 0.24	0.20 – 1.50
			●	M	1	MC6115	MP	245 – 475	0.08 – 0.30	0.30 – 2.00
			●	M	2	MC6115	MV	245 – 475	0.08 – 0.30	0.30 – 2.00
			●	M	3	MC6115	MW	245 – 475	0.10 – 0.35	0.80 – 2.50
			✱	F	1	MC6125	FP	320 – 505	0.04 – 0.20	0.20 – 0.90
			✱	F	2	MC6135	FP	265 – 400	0.04 – 0.20	0.20 – 0.90
			✱	L	1	MC6125	LP	320 – 505	0.06 – 0.25	0.20 – 1.00
			✱	L	2	MC6135	LP	265 – 400	0.06 – 0.25	0.20 – 1.00
			✱	L	3	MC6125	SW	320 – 505	0.06 – 0.24	0.20 – 1.50
			✱	M	1	MC6125	MP	270 – 420	0.08 – 0.30	0.30 – 2.00
			✱	M	2	MC6135	MP	220 – 330	0.08 – 0.30	0.30 – 2.00
			✱	M	3	MC6125	MV	270 – 420	0.08 – 0.30	0.30 – 2.00
			✱	M	4	MC6125	MW	270 – 420	0.10 – 0.35	0.80 – 2.50
	Carbon and alloy steel	180 – 280 HB	●	F	1	MC6115	FP	220 – 420	0.04 – 0.20	0.20 – 0.90
			●	F	2	MC6125	FP	240 – 370	0.04 – 0.20	0.20 – 0.90
			●	F	3	MC6115	FV	220 – 420	0.04 – 0.20	0.20 – 0.90
			●	L	1	MC6115	LP	220 – 420	0.06 – 0.25	0.20 – 1.00
			●	L	2	MC6125	LP	240 – 370	0.06 – 0.25	0.20 – 1.00
			●	M	1	MC6125	MP	200 – 310	0.08 – 0.30	0.30 – 2.00
			●	M	2	MC6115	MP	180 – 350	0.08 – 0.30	0.30 – 2.00
			●	M	3	MC6125	MV	200 – 310	0.08 – 0.30	0.30 – 2.00
			●	M	4	MC6115	MV	180 – 350	0.08 – 0.30	0.30 – 2.00
			●	M	5	MC6115	MW	180 – 350	0.10 – 0.35	0.80 – 2.50
			✱	F	1	MC6125	FP	240 – 370	0.04 – 0.20	0.20 – 0.90
			✱	F	2	MC6135	FP	195 – 295	0.04 – 0.20	0.20 – 0.90
			✱	F	3	MC6125	FV	240 – 370	0.04 – 0.20	0.20 – 0.90
			✱	L	1	MC6125	LP	240 – 370	0.06 – 0.25	0.20 – 1.00
			✱	L	2	MC6135	LP	195 – 295	0.06 – 0.25	0.20 – 1.00
			✱	L	3	MC6125	SW	240 – 370	0.06 – 0.24	0.20 – 1.50
			✱	M	1	MC6125	MP	200 – 310	0.08 – 0.30	0.30 – 2.00
			✱	M	2	MC6135	MP	160 – 245	0.08 – 0.30	0.30 – 2.00
			✱	M	3	MC6125	MV	200 – 310	0.08 – 0.30	0.30 – 2.00

1/2

1. Recommended cutting conditions for 5°/7°/11° positive inserts are provided as a guideline only.
   Verify the recommended conditions for each boring bar as cutting conditions for internal machining will vary depending on the length of overhang.
2. Please scan the QR code for a pamphlet of the recommended conditions for the XCMT profile holder insert.

Cutting conditions: ●: Stable cutting ●: General cutting ✱: Unstable cutting

MC6100 SERIES – 5°, 7° POSITIVE INSERTS (FOR EXTERNAL TURNING)

	Material	Properties	Conditions	F L M R	Priority	Grade		Vc	f	ap
P	Carbon and alloy steel	280 – 350 HB	●	F	1	MC6115	FP	155 – 295	0.04 – 0.20	0.20 – 0.90
			●	F	2	MC6115	FV	155 – 295	0.04 – 0.20	0.20 – 0.90
			●	L	1	MC6115	LP	155 – 295	0.06 – 0.25	0.20 – 1.00
			●	M	1	MC6115	MP	130 – 245	0.08 – 0.30	0.30 – 2.00
			●	M	2	MC6115	MV	130 – 245	0.08 – 0.30	0.30 – 2.00
			✱	F	1	MC6125	FP	170 – 265	0.04 – 0.20	0.20 – 0.90
			✱	F	2	MC6135	FP	135 – 210	0.04 – 0.20	0.20 – 0.90
			✱	L	1	MC6125	LP	170 – 265	0.06 – 0.25	0.20 – 1.00
			✱	L	2	MC6135	LP	135 – 210	0.06 – 0.25	0.20 – 1.00
			✱	M	1	MC6125	MP	140 – 220	0.08 – 0.30	0.30 – 2.00
			✱	M	2	MC6135	MP	115 – 175	0.08 – 0.30	0.30 – 2.00
			✱	M	3	MC6125	MV	140 – 220	0.08 – 0.30	0.30 – 2.00

2/2

1. Recommended cutting conditions for 5°/7°/11° positive inserts are provided as a guideline only.
   Verify the recommended conditions for each boring bar as cutting conditions for internal machining will vary depending on the length of overhang.
2. Please scan the QR code for a pamphlet of the recommended conditions for the XCMT profile holder insert.

Cutting conditions: ●: Stable cutting ●: General cutting ✱: Unstable cutting

MC6100 SERIES – 11° POSITIVE INSERTS (FOR EXTERNAL TURNING)

	Material	Properties	Conditions	F L M R	Priority	Grade		Vc	f	ap
P	Mild steel	≤180 HB	●	F	1	MC6125	FP	320 – 505	0.04 – 0.20	0.20 – 0.90
			●	F	2	MC6125	FV	320 – 505	0.04 – 0.20	0.20 – 0.90
			●	L	1	MC6125	LP	320 – 505	0.06 – 0.25	0.20 – 1.00
			●	L	2	MC6115	R-Std	245 – 475	0.08 – 0.30	0.30 – 2.00
			●	M	1	MC6125	MP	270 – 420	0.08 – 0.30	0.30 – 2.00
			●	M	2	MC6115	MP	245 – 475	0.08 – 0.30	0.30 – 2.00
			●	M	3	MC6125	MV	270 – 420	0.08 – 0.30	0.30 – 2.00
			●	M	4	MC6115	MV	245 – 475	0.08 – 0.30	0.30 – 2.00
			✱	L	1	MC6125	LP	320 – 505	0.06 – 0.25	0.20 – 1.00
			✱	L	2	MC6135	LP	265 – 400	0.06 – 0.25	0.20 – 1.00
			✱	M	1	MC6125	MP	270 – 420	0.08 – 0.30	0.30 – 2.00
			✱	M	2	MC6135	MP	220 – 330	0.08 – 0.30	0.30 – 2.00
			✱	M	3	MC6125	MV	270 – 420	0.08 – 0.30	0.30 – 2.00
			✱	M	4	MC6135	MV	220 – 330	0.08 – 0.30	0.30 – 2.00
	Carbon and alloy steel	180 – 280 HB	●	F	1	MC6125	FP	240 – 370	0.04 – 0.20	0.20 – 0.90
			●	F	2	MC6125	FV	240 – 370	0.04 – 0.20	0.20 – 0.90
			●	L	1	MC6125	LP	240 – 370	0.06 – 0.25	0.20 – 1.00
			●	L	2	MC6115	LP	220 – 420	0.06 – 0.25	0.20 – 1.00
			●	M	1	MC6125	MP	200 – 310	0.08 – 0.30	0.30 – 2.00
			●	M	2	MC6125	MV	200 – 310	0.08 – 0.30	0.30 – 2.00
			●	M	3	MC6115	R-Std	180 – 350	0.08 – 0.30	0.30 – 2.00
			●	M	4	MC6125	R-Std	200 – 310	0.08 – 0.30	0.30 – 2.00
			✱	L	1	MC6125	LP	240 – 370	0.06 – 0.25	0.20 – 1.00
			✱	L	2	MC6135	LP	195 – 295	0.06 – 0.25	0.20 – 1.00
			✱	M	1	MC6125	MP	200 – 310	0.08 – 0.30	0.30 – 2.00
			✱	M	2	MC6135	MP	160 – 245	0.08 – 0.30	0.30 – 2.00
			✱	M	3	MC6125	MV	200 – 310	0.08 – 0.30	0.30 – 2.00
			✱	M	4	MC6135	MV	160 – 245	0.08 – 0.30	0.30 – 2.00


1/1


Cutting conditions: ●: Stable cutting ●: General cutting ✱: Unstable cutting

MC6115


APPLICATION EXAMPLES


Tool	WNMG080412-MP
Material	DIN 20MnCr5
Component	Machine parts
Application	Face turning
Vc (m/min)	235
f (mm/rev)	0.35
ap (mm)	1.0
Cutting mode	Wet cutting
Results	MC6115 achieved long tool life with excellent wear resistance and stable cutting, compared to a conventional product.



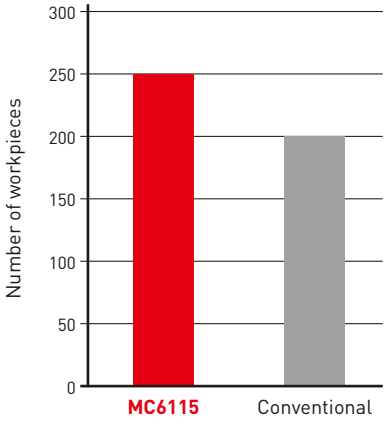



Tool	WNMG080408-MP
Material	DIN 41Cr4
Component	Hub
Application	External turning and facing
Vc (m/min)	300
f (mm/rev)	0.25–0.35
ap (mm)	1–2.5
Cutting mode	Wet cutting
Results	Superior wear resistance means tool life was extended when compared to conventional products.



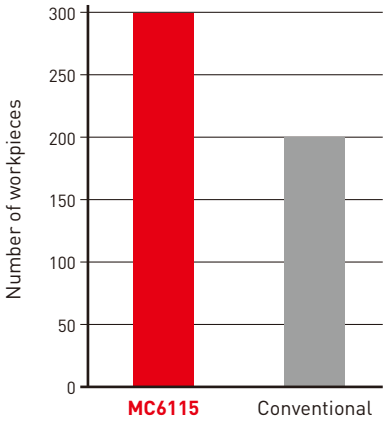

Tool	DNMG150612-SA
Material	Bearing steel
Component	Bearing parts
Application	External turning and facing
Vc (m/min)	260
f (mm/rev)	0.3–0.35
ap (mm)	0.5
Cutting mode	Wet cutting
Results	Extreme resistance to chipping achieved 150 % tool life and enabled easy identification of worn edges.



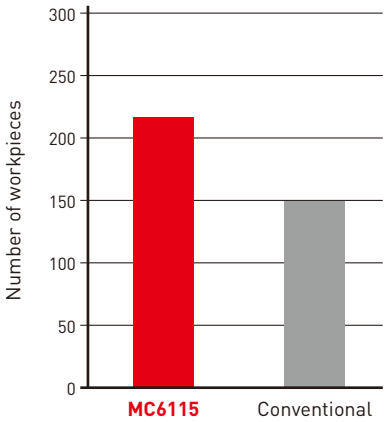


The examples shown are customer's applications, therefore can differ from the recommended conditions.

MC6125

APPLICATION EXAMPLES


Tool	CNMG120408-MA
Material	C45
Component	Hex bar parts
Application	Interrupted finish turning
Vc (m/min)	150
f (mm/rev)	0.2
ap (mm)	2.0, 1.6
Cutting mode	Wet cutting
Results	Conventional products fractured after chipping but MC6125 formed ideal chip shapes and achieved a longer tool life.



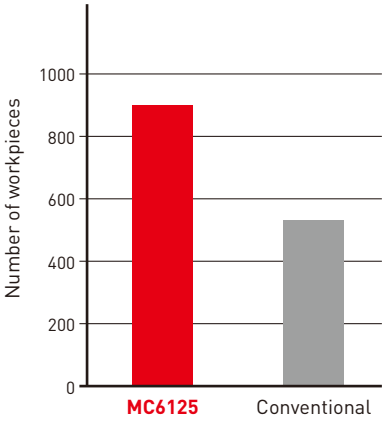



Tool	DNMG150412-SH
Material	DIN C50E
Application	Interrupted finish turning
Vc (m/min)	200
f (mm/rev)	0.3
ap (mm)	1.2
Cutting mode	Wet cutting
Results	MC6125 provided a stable cutting action and achieved 1.5 times more tool life than conventional products.



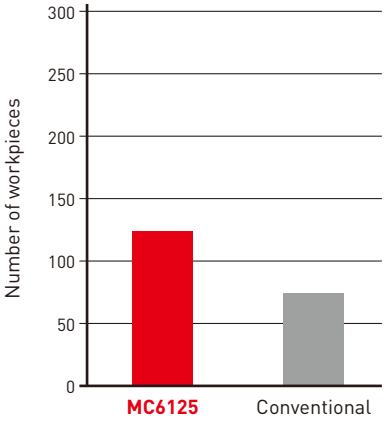

Tool	CNMG120412-RP
Material	DIN 34CrMo4
Component	Flange parts
Application	External turning and facing
Vc (m/min)	200
f (mm/rev)	0.25
ap (mm)	1.5
Cutting mode	Wet cutting
Results	Conventional products machined an inconsistent number of components. MC6125 was more consistent and improved tool life.



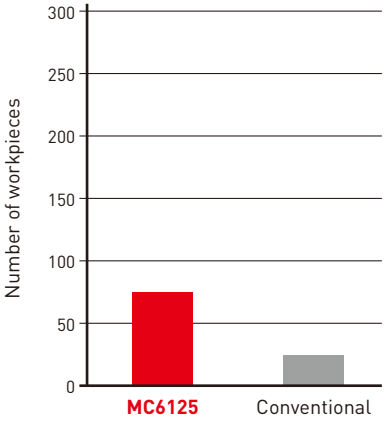

The examples shown are customer's applications, therefore can differ from the recommended conditions.

SYMBOLS

Recommended cutting conditions

NEW **Completely new products or expansions released in the current Spring or Autumn product launch and are not included in the latest version of the General Catalogue.**

NEW **Products or expansions that have already been introduced in one of the previous Spring or Autumn product launches but are not included in the latest General Catalogue.**

APPLICATION


Face milling


Chamfer milling


Shoulder milling with R


Face milling close to a wall


Shoulder milling


Side milling


Slot milling


Ramping


Pocket milling


Slot milling with R


Copy milling


T-Slot milling

MACHINING TYPE



Roughing



Medium cutting



Light cutting



Pre-finishing



Finishing



Fine-finishing

TOOL MATERIAL



Ultra micro grain carbide
Ultra micro grain carbide substrate material.



Cubic boron nitride
Mitsubishi Materials' original CBN material.



Ceramic
For high speed efficient machining of super alloys due to the excellent high temperature strength property.



High hardness powder metallurgy HSS
High hardness powder metallurgy HSS substrate material.



High grade high alloy HSS
High grade high alloy HSS substrate material.



Cobalt high speed steel
Cobalt high speed steel substrate material.



High speed steel
High speed steel substrate material.

SYMBOLS

COATING



SMART MIRACLE coating
New smooth and dense coating technology for high efficiency milling of difficult to cut materials.



CRN coating
Newly developed CrN coating for Copper Electrodes machining.



Violet coating
Increased tool life of 2-3 times more than TiN coated products.



DP coating
New generation coating suitable for a wide range of materials.



MIRACLE coating
The original Miracle (Al,Ti)N coating.
Also suitable for dry cutting.



(Al, Ti)N coating
(Al,Ti)N highly versatile application range.



(Al,Ti,Cr)N multi-layer coating
For carbon, alloy and hardened steels.



IMPACT MIRACLE coating
Single phase nano crystal coating technology has higher film hardness and heat resistance.



MIRACLE coating
The original MIRACLE (Al,Ti)N coating.
Also suitable for dry cutting.



VFR coating
The (AlCrSi)N/(AlTiSti)N PVD multilayer coating is ideal for machining of extremely hard materials up to 70 HRC.



DLC coating
Hardness similar to CVD diamond coating achieved with high adhesion strength.



Diamond coating
Suitable for CFRP and CFRP-aluminium materials.



Diamond coating
Suitable for graphite machining.



Diamond coating
The original CVD diamond coating.



CVD Diamond coating
Unique multi-layer micro-grain diamond crystal control technology drastically improves wear resistance and smoothness.

CUTTING EDGE PROPERTIES



Sharp corner edge
Indicates the end mill has a sharp corner edge.



Gash land
Indicates the end mill cutting edge has a protective chamfer.



Rake angle



Helix angle
Indicates the helix angle of the end mill.



Point angle
Indicates the drill point angle.



Roughing flute geometry



Variable helix



Rounded gash



Corner angle

WEB THINNING



X type point geometry
X web thinning used at the drill point.



XR type point geometry
XR web thinning used at the drill point.



S type point geometry
Easy cutting geometry.



N type point geometry
Effective when the point web is thick.



Chipbreaker

SYMBOLS

TOLERANCES



Tolerance of taper angle
Indicates the tolerance of the taper angle.



R tolerance
Indicates the radial tolerance of a ball nose end mill.



R tolerance
Indicates the radial tolerance of the corner radius.



R tolerance
Indicates the radial tolerance of a cutter with a corner radius.



Outside diameter tolerance
Indicates the diameter tolerance of the end mill.



Peak tolerance
Indicates the tolerance for the end diameter.



Shank diameter tolerance



Shank diameter tolerance



Drill tolerance / diameter

COOLANT HOLES



External coolant



Internal coolant



Internal coolant



Centered, internal coolant hole



Radial, internal coolant holes



Internal coolant holes



Internal coolant holes

MEMO

EUROPEAN SALES COMPANIES

GERMANY
MITSUBISHI MATERIALS TOOLS EUROPE GMBH
Comeniusstr. 2 . 40670 Meerbusch
Phone +49 2159 91890 . Fax +49 2159 918966
Email admin@mmchg.de

UK Office
MMC HARDMETAL UK LTD
1 Centurion Court, Centurion Way
Tamworth, B77 5PN
Phone +44 1827 312312
Email sales@mitsubishicarbide.co.uk

UK Deliveries / Returns
Unit 4 B5K Business Park, Quartz Close
Tamworth, B77 4GR

SPAIN
MITSUBISHI MATERIALS ESPAÑA, S.A.
Calle Emperador 2 . 46136 Museros / Valencia
Phone +34 96 1441711
Email comercial@mmevalencia.es

FRANCE
MMC METAL FRANCE S.A.R.L.
6, Rue Jacques Monod . 91400 Orsay
Phone +33 1 69 35 53 53 . Fax +33 1 69 35 53 50
Email mmfsales@mmc-metal-france.fr

POLAND
MMC HARDMETAL POLAND SP. Z O.O.
ul. Strzegomska 42B . 53-611 Wrocław . Millennium Tower II, 2 piętro, biuro nr 2.12
Phone +48 71335 1620 . Fax +48 71335 1621
Email sales@mitsubishicarbide.com.pl

ITALY
MMC ITALIA S.R.L.
Viale Certosa 144 . 20156 Milano
Phone +39 0293 77031 . Fax +39 0293 589093
Email info@mmc-italia.it

TURKEY
MITSUBISHI MATERIALS TOOLS EUROPE GMBH ALMANYA İZMİR MERKEZ ŞUBESİ
Adalet Mahallesi Anadolu Caddesi No: 41-1 . 15001 35530 Bayraklı / İzmir
Phone +90 232 5015000 . Fax +90 232 5015007
Email info@mmchg.com.tr

www.mmc-carbide.com

DISTRIBUTED BY:

Published by: MITSUBISHI MATERIALS TOOLS EUROPE