


NEW

2026.04

B290E

LC2005


NEW DLC COATED GRADE WITH THIN-FILM TECHNOLOGY FOR PRECISION MACHINING OF NON-FERROUS METALS. DISPLAYS OUTSTANDING ADHESION AND WEAR RESISTANCE PROPERTIES.

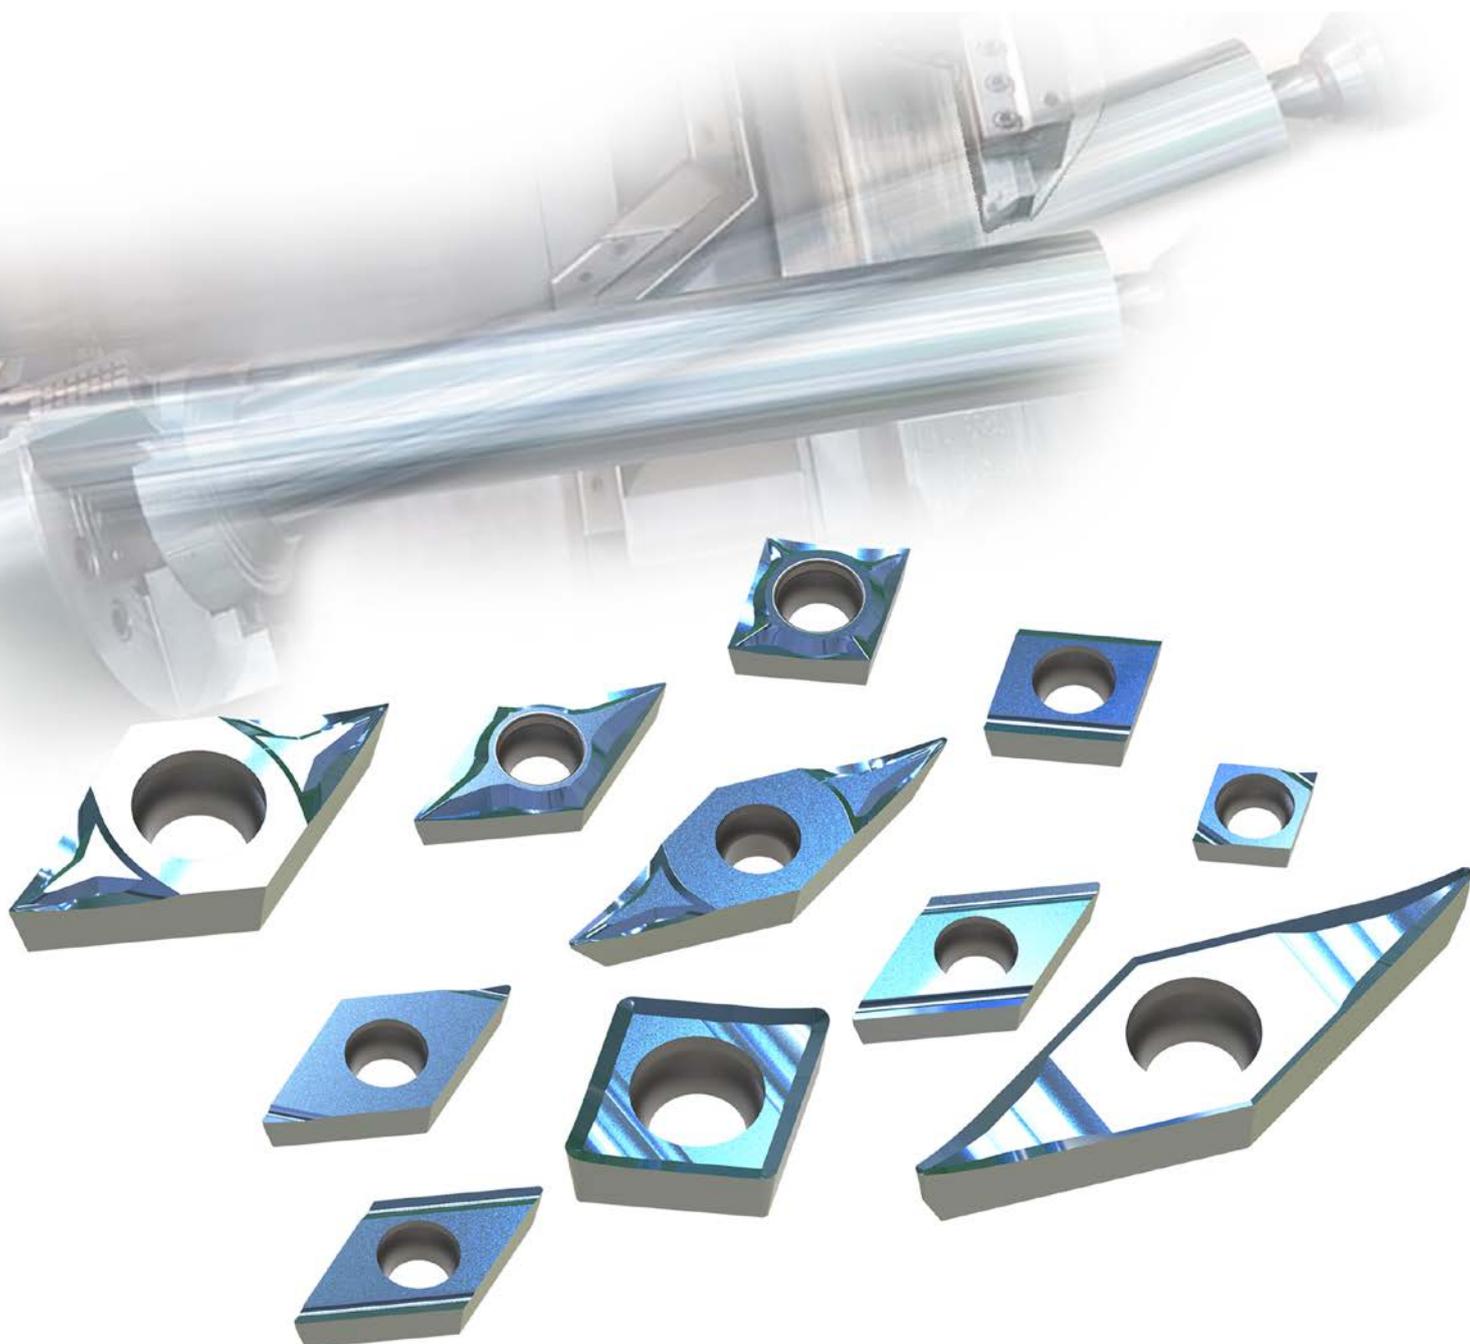

LC2005

EVOLVED HYDROGEN-FREE DLC COATING

DLC coating is a film that possesses both the hardness of diamond and the lubricity of graphite. It is particularly suitable for aluminium alloy machining due to its excellent wear resistance and anti-adhesion properties, making it ideally suited for use in metal cutting applications. Hydrogen-free DLC films have high hardness and provide superior wear and heat resistance, which is why they have been widely used for coating cutting tools. Generally, while hydrogen-free DLC excels in wear and heat resistance, it faces the challenge of being prone to peeling due to the significant hardness difference from the substrate. Mitsubishi Materials has overcome this challenge by adopting a newly developed thin hydrogen-free DLC film with improved adhesion, thereby achieving an excellent balance of wear resistance and strong adhesion to the substrate.

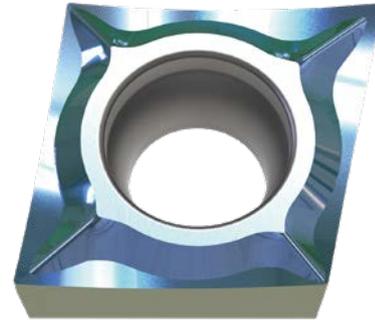

THREE KEY FEATURES OF HYDROGEN-FREE DLC COATING

Thin coating effective for precision machining

Ideal for machining high-precision components, delivering excellent component surface finishes.

High hardness with excellent wear resistance

Its high hardness provides superior wear resistance, resulting in extended tool life.

Outstanding adhesion

Achieves superior adhesion, suppressing sudden dimensional discrepancies caused by film peeling or chipping.

**AN ENVIRONMENTALLY FRIENDLY PRODUCT BECAUSE OF
EFFICIENCY IMPROVEMENTS DUE TO THE INCREASED
PERFORMANCE AND LONGER TOOL LIFE.**


LC2005

DLC COATED GRADE FOR TURNING OF NON-FERROUS METALS

COMPARISON OF THE COMPONENT SURFACE FINISH WHEN MACHINING A6061

The sharpness of the cemented carbide substrate cutting edge and the smoothness of the thin-film make it possible to achieve high-quality machining.


Material	JIS A6061
Insert	DCGT11T302M-FS-P LC2005
Vc (m/min)	300
f (mm/rev)	0.05
ap (mm)	0.2
Cutting mode	Dry and wet cutting

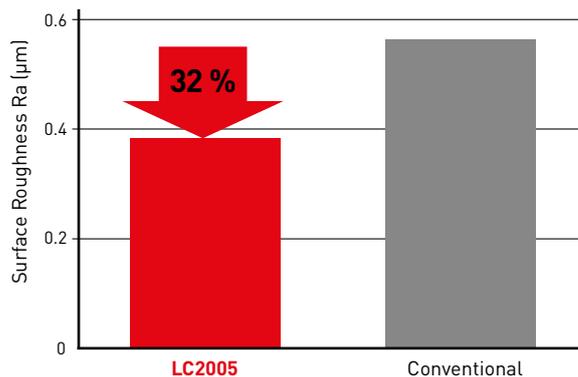

EXTREMELY HIGH QUALITY CUTTING EDGE



LC2005

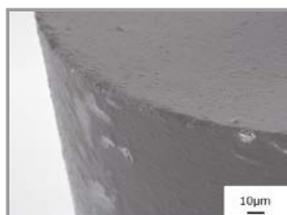

Conventional


SURFACE ROUGHNESS

	Ra (µm)	Rz (µm)
LC2005	0.383	1.758
Conventional	0.563	2.031


Measured after 226 minutes of wet cutting

Measured after 27 minutes of dry cutting

LC2005

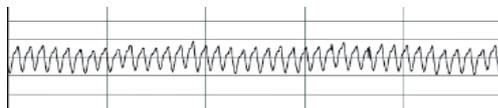


Ra = 0.383 µm
Rz = 1.758 µm

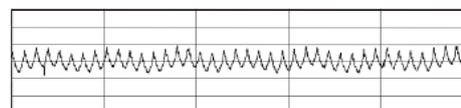


Ra = 0.286 µm
Rz = 1.630 µm

Conventional

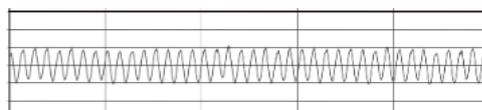

Ra = 0.563 µm
Rz = 2.031 µm

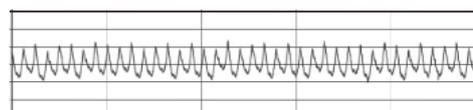


Ra = 0.438 µm
Rz = 2.245 µm

LC2005

A HYDROGEN-FREE DLC COATING WITH EXCELLENT WEAR AND HEAT RESISTANCE

The thin-film enhances adhesion, achieving excellent tool life in both wet and dry cutting.

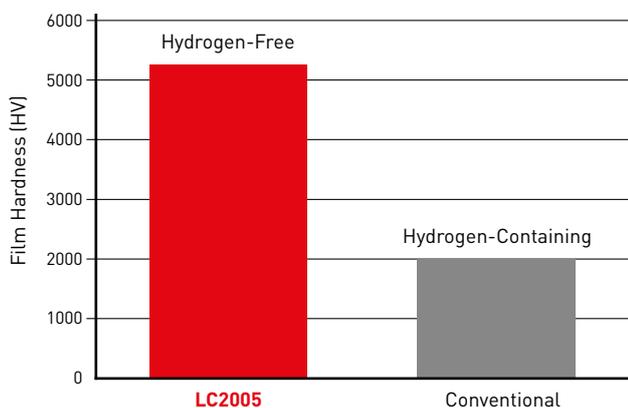


The colours of DLC coatings can vary in appearance depending on the thickness of the film. However, this is only visual and has no effect on quality or performance.

WEAR RESISTANCE COMPARISON WHEN MACHINING A6061

Mitsubishi Materials' hydrogen-free coating has excellent peeling resistance and demonstrates the inherent high performance of the coating.


Material	JIS A6061
Insert	DCGT11T302M-FS-P LC2005
Vc (m/min)	300
f (mm/rev)	0.05
ap (mm)	0.2
Cutting mode	Wet cutting

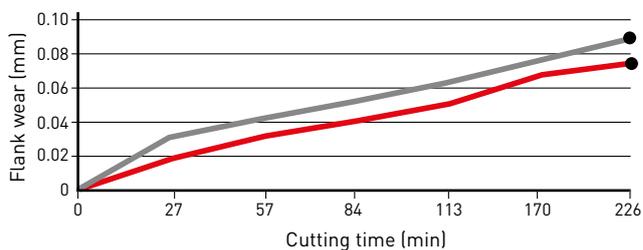

● Taken after cutting length of 226 min



LC2005
FS-P

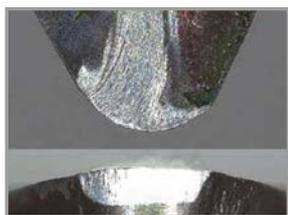



Conventional
Wear progresses due to peeling

CCET, CCGT, DCET, DCGT


7° POSITIVE INSERTS (WITH HOLE)

E Class, G Class

CCET, CCGT

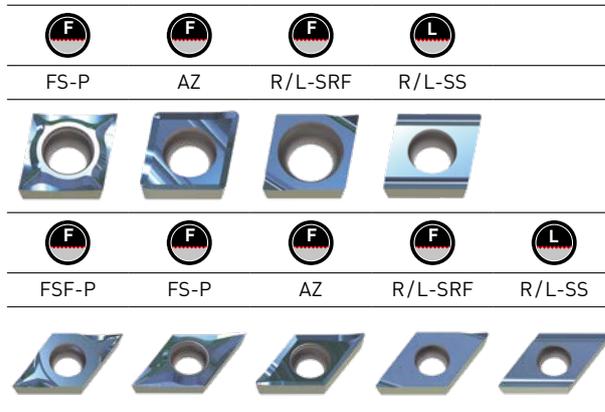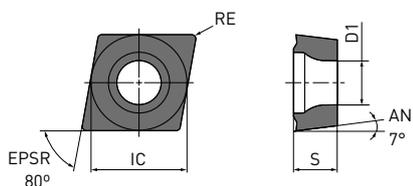

DCET, DCGT

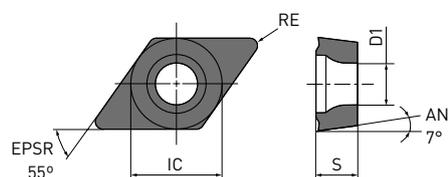

Order number	 	LC2005	IC	S	RE	D1
CCGT060201M-FS-P	F	●	6.35	2.38	≤0.1	2.8
CCGT060202M-FS-P	F	●	6.35	2.38	≤0.2	2.8
CCGT060204M-FS-P	F	●	6.35	2.38	≤0.4	2.8
CCGT09T301M-FS-P	F	●	9.53	3.97	≤0.1	4.4
CCGT09T302M-FS-P	F	●	9.53	3.97	≤0.2	4.4
CCGT09T304M-FS-P	F	●	9.53	3.97	≤0.4	4.4
CCGT09T304-AZ	F	●	9.53	3.97	0.4	4.4
CCGT09T308-AZ	F	●	9.53	3.97	0.8	4.4
CCET03S1V3R-SRF	F	●	3.97	1.39	0.03	2
CCET03S1V3L-SRF	F	●	3.97	1.39	0.03	2
CCET03S101MR-SRF	F	●	3.97	1.39	≤0.1	2
CCET03S101ML-SRF	F	●	3.97	1.39	≤0.1	2
CCET03S102MR-SRF	F	●	3.97	1.39	≤0.2	2
CCET03S102ML-SRF	F	●	3.97	1.39	≤0.2	2
CCET03S104MR-SRF	F	●	3.97	1.39	≤0.4	2
CCET03S104ML-SRF	F	●	3.97	1.39	≤0.4	2
CCET04T0V3R-SRF	F	●	4.76	1.79	0.03	2.4
CCET04T0V3L-SRF	F	●	4.76	1.79	0.03	2.4
CCET04T001MR-SRF	F	●	4.76	1.79	≤0.1	2.4
CCET04T001ML-SRF	F	●	4.76	1.79	≤0.1	2.4
CCET04T002MR-SRF	F	●	4.76	1.79	≤0.2	2.4
CCET04T002ML-SRF	F	●	4.76	1.79	≤0.2	2.4
CCET04T004MR-SRF	F	●	4.76	1.79	≤0.4	2.4

1/2

(10 inserts in one case)



● : Inventory maintained. ★ : Inventory maintained in Japan.

CCET, CCGT, DCET, DCGT – 7° POSITIVE INSERTS (WITH HOLE)

Order number	 	LC2005	IC	S	RE	D1
CCET04T004ML-SRF	F	●	4.76	1.79	≤0.4	2.4
CCET060201MR-SS	L	●	6.35	2.38	≤0.1	2.8
CCET060201ML-SS	L	●	6.35	2.38	≤0.1	2.8
CCET060202MR-SS	L	●	6.35	2.38	≤0.2	2.8
CCET060202ML-SS	L	●	6.35	2.38	≤0.2	2.8
CCET09T301MR-SS	L	●	9.525	3.97	≤0.1	4.4
CCET09T301ML-SS	L	●	9.525	3.97	≤0.1	4.4
CCET09T302MR-SS	L	●	9.525	3.97	≤0.2	4.4
CCET09T302ML-SS	L	●	9.525	3.97	≤0.2	4.4
CCET09T304MR-SS	L	●	9.525	3.97	≤0.4	4.4
CCET09T304ML-SS	L	●	9.525	3.97	≤0.4	4.4
DCGT070201M-FSF-P	F	●	6.35	2.38	≤0.1	2.8
DCGT070202M-FSF-P	F	●	6.35	2.38	≤0.2	2.8
DCGT11T301M-FSF-P	F	●	9.525	3.97	≤0.1	4.4
DCGT11T302M-FSF-P	F	●	9.525	3.97	≤0.2	4.4
DCGT070201M-FS-P	F	●	6.35	2.38	≤0.1	2.8
DCGT070202M-FS-P	F	●	6.35	2.38	≤0.2	2.8
DCGT070204M-FS-P	F	●	6.35	2.38	≤0.4	2.8
DCGT11T301M-FS-P	F	●	9.525	3.97	≤0.1	4.4
DCGT11T302M-FS-P	F	●	9.525	3.97	≤0.2	4.4
DCGT11T304M-FS-P	F	●	9.525	3.97	≤0.4	4.4
DCGT11T304-AZ	F	●	9.525	3.97	0.4	4.4
DCGT11T308-AZ	F	●	9.525	3.97	0.8	4.4
DCET070201MR-SRF	F	●	6.35	2.38	≤0.1	2.8
DCET070201ML-SRF	F	●	6.35	2.38	≤0.1	2.8
DCET070202MR-SRF	F	●	6.35	2.38	≤0.2	2.8
DCET070202ML-SRF	F	●	6.35	2.38	≤0.2	2.8
DCET070204MR-SRF	F	●	6.35	2.38	≤0.4	2.8
DCET070204ML-SRF	F	●	6.35	2.38	≤0.4	2.8
DCET11T301MR-SRF	F	●	9.525	3.97	≤0.1	4.4
DCET11T301ML-SRF	F	●	9.525	3.97	≤0.1	4.4
DCET11T302MR-SRF	F	●	9.525	3.97	≤0.2	4.4
DCET11T302ML-SRF	F	●	9.525	3.97	≤0.2	4.4
DCET11T304MR-SRF	F	●	9.525	3.97	≤0.4	4.4
DCET11T304ML-SRF	F	●	9.525	3.97	≤0.4	4.4
DCET0702V3R-SS	L	●	6.35	2.38	0.03	2.8
DCET0702V3L-SS	L	●	6.35	2.38	0.03	2.8
DCET070201MR-SS	L	●	6.35	2.38	≤0.1	2.8
DCET070201ML-SS	L	●	6.35	2.38	≤0.1	2.8
DCET070202MR-SS	L	●	6.35	2.38	≤0.2	2.8
DCET070202ML-SS	L	●	6.35	2.38	≤0.2	2.8
DCET11T301MR-SS	L	●	9.525	3.97	≤0.1	4.4
DCET11T301ML-SS	L	●	9.525	3.97	≤0.1	4.4
DCET11T302MR-SS	L	●	9.525	3.97	≤0.2	4.4
DCET11T302ML-SS	L	●	9.525	3.97	≤0.2	4.4
DCET11T304MR-SS	L	●	9.525	3.97	≤0.4	4.4
DCET11T304ML-SS	L	●	9.525	3.97	v0.4	4.4

2/2

(10 inserts in one case)




VCGT, VPGT


7°, 11° POSITIVE INSERTS (WITH HOLE)

G Class

VCGT

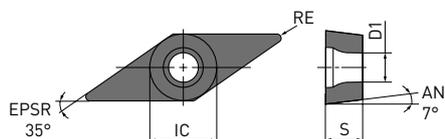

VPGT

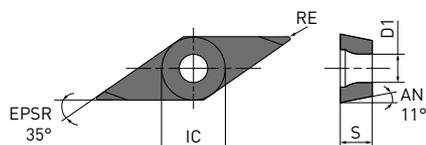

Order number



LC2005

IC

S

RE

D1

VCGT160404-AZ	F	●	9.525	4.76	0.4	4.4
VPGT110301M-FSF-P	F	●	6.35	3.18	≤0.1	2.85
VPGT110302M-FSF-P	F	●	6.35	3.18	≤0.2	2.85

1/1

[10 inserts in one case]



LC2005

RECOMMENDED CUTTING CONDITIONS

Material	Properties	Cutting conditions	 		Grade	Vc	f	ap
Aluminium alloys (A6061, A7075, etc.)	Si < 5 %	●	F	FS-P	LC2005	200 – 700	0.04 – 0.12	0.20 – 1.4
			F	FSF-P	LC2005	200 – 700	0.02 – 0.10	0.02 – 1.0
			F	R/L-SRF	LC2005	200 – 700	0.02 – 0.12	0.20 – 0.6
			F	AZ	LC2005	200 – 700	0.10 – 0.40	0.20 – 3.0
			L	R/L-SS	LC2005	200 – 700	0.01 – 0.09	0.10 – 5.0
		●	F	FS-P	LC2005	200 – 700	0.04 – 0.12	0.20 – 1.4
			F	FSF-P	LC2005	200 – 700	0.02 – 0.10	0.02 – 1.0
			F	R/L-SRF	LC2005	200 – 700	0.02 – 0.12	0.20 – 0.6
			F	AZ	LC2005	200 – 700	0.10 – 0.40	0.20 – 3.0
			L	R/L-SS	LC2005	200 – 700	0.01 – 0.09	0.10 – 5.0
		✚	F	FS-P	LC2005	200 – 700	0.04 – 0.12	0.20 – 1.4
			F	FSF-P	LC2005	200 – 700	0.02 – 0.10	0.02 – 1.0
			F	R/L-SRF	LC2005	200 – 700	0.02 – 0.12	0.20 – 0.6
			F	AZ	LC2005	200 – 700	0.10 – 0.40	0.20 – 3.0
			L	R/L-SS	LC2005	200 – 700	0.01 – 0.09	0.10 – 5.0
Aluminium alloys (AC4B, etc.)	5 ≤ Si ≤ 10 %	●	F	FS-P	LC2005	200 – 700	0.04 – 0.12	0.20 – 1.4
			F	FSF-P	LC2005	200 – 700	0.02 – 0.10	0.02 – 1.0
			F	R/L-SRF	LC2005	200 – 700	0.02 – 0.12	0.20 – 0.6
			F	AZ	LC2005	200 – 700	0.10 – 0.40	0.20 – 3.0
			L	R/L-SS	LC2005	200 – 700	0.01 – 0.09	0.10 – 5.0
		●	F	FS-P	LC2005	200 – 700	0.04 – 0.12	0.20 – 1.4
			F	FSF-P	LC2005	200 – 700	0.02 – 0.10	0.02 – 1.0
			F	R/L-SRF	LC2005	200 – 700	0.02 – 0.12	0.20 – 0.6
			F	AZ	LC2005	200 – 700	0.10 – 0.40	0.20 – 3.0
			L	R/L-SS	LC2005	200 – 700	0.01 – 0.09	0.10 – 5.0
		✚	F	FS-P	LC2005	200 – 700	0.04 – 0.12	0.20 – 1.4
			F	FSF-P	LC2005	200 – 700	0.02 – 0.10	0.02 – 1.0
			F	R/L-SRF	LC2005	200 – 700	0.02 – 0.12	0.20 – 0.6
			F	AZ	LC2005	200 – 700	0.10 – 0.40	0.20 – 3.0
			L	R/L-SS	LC2005	200 – 700	0.01 – 0.09	0.10 – 5.0
Aluminium alloys (ADC12, A390, etc.)	Si > 10 %	●	F	FS-P	LC2005	200 – 700	0.04 – 0.12	0.20 – 1.4
			F	FSF-P	LC2005	200 – 700	0.02 – 0.10	0.02 – 1.0
			F	R/L-SRF	LC2005	200 – 700	0.02 – 0.12	0.20 – 0.6
			F	AZ	LC2005	200 – 700	0.10 – 0.40	0.20 – 3.0
			L	R/L-SS	LC2005	200 – 700	0.01 – 0.09	0.10 – 5.0
		●	F	FS-P	LC2005	200 – 700	0.04 – 0.12	0.20 – 1.4
			F	FSF-P	LC2005	200 – 700	0.02 – 0.10	0.02 – 1.0
			F	R/L-SRF	LC2005	200 – 700	0.02 – 0.12	0.20 – 0.6
			F	AZ	LC2005	200 – 700	0.10 – 0.40	0.20 – 3.0
			L	R/L-SS	LC2005	200 – 700	0.01 – 0.09	0.10 – 5.0
		✚	F	FS-P	LC2005	200 – 700	0.04 – 0.12	0.20 – 1.4
			F	FSF-P	LC2005	200 – 700	0.02 – 0.10	0.02 – 1.0
			F	R/L-SRF	LC2005	200 – 700	0.02 – 0.12	0.20 – 0.6
			F	AZ	LC2005	200 – 700	0.10 – 0.40	0.20 – 3.0
			L	R/L-SS	LC2005	200 – 700	0.01 – 0.09	0.10 – 5.0

1/1

Cutting conditions: ●: Stable cutting ●: General cutting ✚: Unstable cutting

Cutting area: F: Finish cutting L: Light cutting

SYMBOLS

RECOMMENDED CUTTING CONDITIONS		MACHINING TYPE	
 Recommended cutting conditions		 Roughing	
NEW Completely new products or expansions released in the current Spring or Autumn product launch and are not included in the latest version of the General Catalogue.		 Medium cutting	
NEW Products or expansions that have already been introduced in one of the previous Spring or Autumn product launches but are not included in the latest General Catalogue.		 Light cutting	
APPLICATION		TOOL MATERIAL	
 Face milling		 Pre-finishing	
 Chamfer milling		 Finishing	
 Shoulder milling with R		 Fine-finishing	
 Face milling close to a wall		TOOL MATERIAL	
 Shoulder milling		 Ultra micro grain carbide Ultra micro grain carbide substrate material.	
 Side milling		 Cubic boron nitride Mitsubishi Materials' original CBN material.	
 Slot milling		 Ceramic For high speed efficient machining of super alloys due to the excellent high temperature strength property.	
 Ramping		 High hardness powder metallurgy HSS High hardness powder metallurgy HSS substrate material.	
 Pocket milling		 High grade high alloy HSS High grade high alloy HSS substrate material.	
 Slot milling with R		 Cobalt high speed steel Cobalt high speed steel substrate material.	
 Copy milling		 High speed steel High speed steel substrate material.	
 T-Slot milling			

SYMBOLS

COATING



SMART MIRACLE coating

New smooth and dense coating technology for high efficiency milling of difficult to cut materials.



CRN coating

Newly developed CrN coating for Copper Electrodes machining.



Violet coating

Increased tool life of 2-3 times more than TiN coated products.



DP coating

New generation coating suitable for a wide range of materials.



MIRACLE coating

The original Miracle (Al,Ti)N coating. Also suitable for dry cutting.



[Al, Ti]N coating

[Al,Ti]N highly versatile application range.



[Al,Ti,Cr]N multi-layer coating

For carbon, alloy and hardened steels.



IMPACT MIRACLE coating

Single phase nano crystal coating technology has higher film hardness and heat resistance.



MIRACLE coating

The original MIRACLE (Al,Ti)N coating. Also suitable for dry cutting.



VFR coating

The (AlCrSi)N/(AlTiSti)N PVD multilayer coating is ideal for machining of extremely hard materials up to 70 HRC.



DLC coating

Hardness similar to CVD diamond coating achieved with high adhesion strength.



Diamond coating

Suitable for CFRP and CFRP-aluminium materials.



Diamond coating

Suitable for graphite machining.



Diamond coating

The original CVD diamond coating.



CVD Diamond coating

Unique multi-layer micro-grain diamond crystal control technology drastically improves wear resistance and smoothness.

CUTTING EDGE PROPERTIES



Sharp corner edge

Indicates the end mill has a sharp corner edge.



Gash land

Indicates the end mill cutting edge has a protective chamfer.



Rake angle



Helix angle

Indicates the helix angle of the end mill.



Point angle

Indicates the drill point angle.



Roughing flute geometry



Variable helix



Rounded gash



Corner angle

WEB THINNING



X type point geometry

X web thinning used at the drill point.



XR type point geometry

XR web thinning used at the drill point.



S type point geometry

Easy cutting geometry.



N type point geometry

Effective when the point web is thick.



Chipbreaker

SYMBOLS

TOLERANCES



Tolerance of taper angle
Indicates the tolerance of the taper angle.



R tolerance
Indicates the radial tolerance of a ball nose end mill.



R tolerance
Indicates the radial tolerance of the corner radius.



R tolerance
Indicates the radial tolerance of a cutter with a corner radius.



Outside diameter tolerance
Indicates the diameter tolerance of the end mill.



Peak tolerance
Indicates the tolerance for the end diameter.



Shank diameter tolerance



Shank diameter tolerance



Drill tolerance / diameter

COOLANT HOLES



External coolant



Internal coolant



Internal coolant



Centered, internal coolant hole



Radial, internal coolant holes



Internal coolant holes



Internal coolant holes

EUROPEAN SALES COMPANIES

GERMANY

MITSUBISHI MATERIALS TOOLS EUROPE GMBH
Comeniusstr. 2 . 40670 Meerbusch
Phone +49 2159 91890 . Fax +49 2159 918966
Email admin@mmchg.de

UK Office

MMC HARDMETAL UK LTD
1 Centurion Court, Centurion Way
Tamworth, B77 5PN
Phone +44 1827 312312
Email sales@mitsubishicarbide.co.uk

UK Deliveries / Returns

Unit 4 B5K Business Park, Quartz Close
Tamworth, B77 4GR

SPAIN

MITSUBISHI MATERIALS ESPAÑA, S.A.
Calle Emperador 2 . 46136 Museros/Valencia
Phone +34 96 1441711
Email comercial@mmevalencia.es

FRANCE

MMC METAL FRANCE S.A.R.L.
6, Rue Jacques Monod . 91400 Orsay
Phone +33 1 69 35 53 53 . Fax +33 1 69 35 53 50
Email mmfsales@mmc-metal-france.fr

POLAND

MMC HARDMETAL POLAND SP. Z O.O.
Al. Armii Krajowej 61 . 50-541 Wrocław
Phone +48 71335 1620 . Fax +48 71335 1621
Email sales@mitsubishicarbide.com.pl

ITALY

MMC ITALIA S.R.L.
Viale Certosa 144 . 20156 Milano
Phone +39 0293 77031 . Fax +39 0293 589093
Email info@mmc-italia.it

TURKEY

MITSUBISHI MATERIALS TOOLS EUROPE GMBH ALMANYA İZMİR MERKEZ ŞUBESİ
Adalet Mahallesi Anadolu Caddesi No: 41-1 . 15001 35530 Bayraklı / İzmir
Phone +90 232 5015000 . Fax +90 232 5015007
Email info@mmchg.com.tr

www.mmc-carbide.com

DISTRIBUTED BY:

□

□

└

└